

Miniature Fuse, 6.3 x 32 mm, Time-Lag T, Sand, 250 VAC



1 - 8 A



10 - 32 A

250 VAC · Time-Lag T

See below:  
[Approvals and Compliances](#)

**Description**

- Available on request
- H = High Breaking Capacity
- UL Standard Fuse


**References**

We recommend for new applications the type [SHT 6.3x32](#)

**Weblinks**

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

**Technical Data**

|                              |   |
|------------------------------|---|
| Rated Voltage                | 150 - 250 VAC, 48 - 63 VDC  |
| Rated current                | 0.5 - 32 A  |
| Breaking Capacity            | 1 kA - 20 kA  |
| Characteristic               | Time-Lag T  |
| Mounting                     | Fuseholder / Clip   |
| Admissible Ambient Air Temp. | -40 °C to 85 °C   |
| Climatic Category            | 40/085/21 acc. to IEC 60068-1   |
| Material: Tube               | Glass with sand filling (1-8 A), ceramic with sand filling (10-32 A)  |
| Material: Endcaps            | Nickel-Plated Copper Alloy  |
| Unit Weight                  | 2.45 g  |
| Storage Conditions           | 0 °C to 60 °C, max. 70% r.h.  |
| Product Marking              |  Rated current, Rated Voltage, Characteristic, Certification marks |

**Approvals and Compliances**


Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

**Approvals**



The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type: SPT 6.3x32

| Approval Logo   | Certificates                 | Certification Body | Description            |
|---|------------------------------|--------------------|------------------------|
|  | <a href="#">UL Approvals</a> | UL                 | UL File Number: E42088 |


**Product standards**

Product standards that are referenced

| Organization  | Design                | Standard           | Description                                     |
|---|-----------------------|--------------------|---|
|  | Designed according to | UL 248-14          | Low voltage fuses - Part 14: Additional fuses   |
|  | Designed according to | CSA22.2 No. 248.14 | Low-Voltage Fuses - Part 14: Supplemental Fuses |






## Application standards

Application standards where the product can be used


| Organization   | Design                         | Standard       | Description   |
|--|--------------------------------|----------------|---|
|  | Designed for applications acc. | IEC/UL 62368-1 | Audio/video, information and communication technology equipment - Part 1: Safety requirements |

## Compliances

The product complies with following Guide Lines

| Identification   | Details  | Initiator   | Description   |
|--|--|-------------|---|
|  | <a href="#">CE declaration of conformity</a>   | SCHURTER AG | The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008. |
|  | <a href="#">UKCA declaration of conformity</a> | SCHURTER AG | The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008.  |
|  | RoHS   | SCHURTER AG | Directive RoHS 2011/65/EU, Amendment (EU) 2015/863  |
|  | China RoHS                                     | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.  |
|  | REACH  | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.                               |


## Dimension [mm]

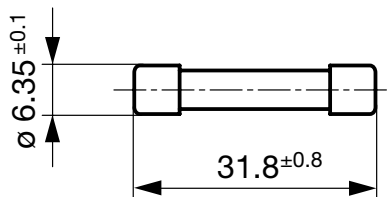


## Pre-Arcing Time

| Rated Current In | 1.1 x In min. | 1.9 x In max. | 2.1 x In max. | 2.75 x In min. | 2.75 x In max. | 4.0 x In min. | 4.0 x In max. | 10.0 x In min. | 10.0 x In max. |
|------------------|---------------|---------------|---------------|----------------|----------------|---------------|---------------|----------------|----------------|
| 0.5 A - 4 A      | >4 h          |               | 60 min        | 2 s            | 40 s           | 150 ms        | 2.5 s         | 5 ms           | 40 ms          |
| 5 A - 16 A       | >4 h          | 60 min        |               | 3 s            | 50 s           | 400 ms        | 4 s           | 15 ms          | 100 ms         |
| 20 A - 25 A      |               | 60 min        |               | 3 s            | 50 s           | 400 ms        | 4 s           | 15 ms          | 100 ms         |
| 32 A             |               | 60 min        |               |                |                |               |               |                |                |

Time-Current-Curves

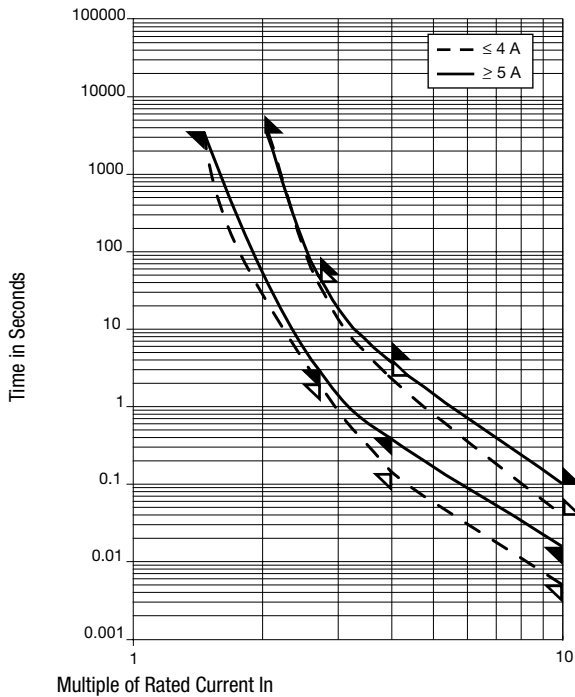

All Variants

| Rated Current [A] | Rated Voltage [VAC] | Breaking Capacity | Voltage Drop 1.0 I <sub>n</sub> max. [mV] | Voltage Drop 1.0 I <sub>n</sub> typ. [mV] | Power Dissipation 1.5 I <sub>n</sub> typ. [mW] | Melting I <sup>2</sup> t 10.0 I <sub>n</sub> typ. [A <sup>2</sup> s] |  | Order Number |
|-------------------|---------------------|-------------------|---|---|--|--|--|--------------|
| 0.5               | 250                 | 1)                | 2500                                      | 2400                                      | 3100   | 0.3  | ●  | 0001.2521    |
| 0.63              | 250                 | 1)                | 2000                                      | 560                                       | 900  | 0.3  | ●  | 0001.2522    |
| 0.8               | 250                 | 1)                | 1200                                      | 490                                       | 1000   | 0.5  | ●  | 0001.2523    |
| 1.25              | 250                 | 1)                | 700                                       | 170                                       | 500  | 2.5  | ●  | 0001.2525    |
| 1.6               | 250                 | 1)                | 500                                       | 240                                       | 1000   | 4.2  | ●  | 0001.2526    |
| 2                 | 250                 | 1)                | 400                                       | 200                                       | 1100   | 13   | ●  | 0001.2527    |
| 2.5               | 250                 | 1)                | 350                                       | 150                                       | 1000   | 18   | ●  | 0001.2528    |
| 3.15              | 250                 | 1)                | 300                                       | 160                                       | 1500   | 33   | ●  | 0001.2529    |
| 4                 | 250                 | 1)                | 250                                       | 130                                       | 1500   | 53   | ●  | 0001.2530    |
| 5                 | 250                 | 1)                | 250                                       | 110                                       | 1500   | 127  | ●  | 0001.2531    |
| 6.3               | 250                 | 1)                | 250                                       | 110                                       | 1900   | 224  | ●  | 0001.2532    |
| 8                 | 250                 | 1)                | 200                                       | 70  | 1600   | 360  | ●  | 0001.2533    |
| 10                | 250                 | 1)                | 200                                       | 70  | 2000   | 805  | ●  | 0001.2534    |
| 12.5              | 250                 | 2)                | 200                                       | 70  | 2300   | 1024   | ●  | 0001.2535    |
| 16                | 250                 | 2)                | 150                                       | 70  | 3800   | 1690   | ●  | 0001.2536    |
| 20                | 250                 | 2)                | 150                                       | 70  | 4300   | 2670   | ●  | 0001.2537    |
| 25                | 150                 | 3)                | 150                                       | 70  | 5100   | 1390   | ●  | 0001.2538    |
| 32                | 150                 | 4)                | 150                                       | 70  | 8600   | 2600   | ●  | 0001.2539    |

Most Popular.

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

- 1) IEC: 1500 A @ 250 VAC, p.f. = 0.7 - 0.8
- 1) UL: 1500 A @ 250 VAC, p.f. = 0.7 - 0.8 / 10 kA @ 125 VAC, p.f. = 0.7 - 0.8 / 20 kA @ 63 VDC
- 2) UL: 1000 A @ 250 VAC, p.f. = 0.95 - 1,0 / 20 kA @ 63 VDC
- 3) UL: 1000 A @ 150 VAC, p.f. = 0.95 - 1,0 / 20 kA @ 63 VDC
- 4) UL: 1000 A @ 150 VAC, p.f. = 0.95 - 1,0 / 20 kA @ 48 VDC

Packaging Unit

Small Box Pack (10 pcs.)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Schurter:

[0001.2525](#) [0001.2522](#) [0001.2527](#) [0001.2526](#) [0001.2539](#) [0001.2524](#) [0001.2521](#) [0001.2535](#) [0001.2531](#) [0001.2536](#)  
[0001.2528](#) [0001.2532](#) [0001.2533](#) [0001.2523](#) [0001.2537](#) [0001.2538](#) [0001.2534](#) [0001.2530](#) [0001.2529](#)