

- Line filter in standard and medical version

# Approvals and Compliances Characteristics - Cost-saving plastic housing Designed for standard applications - Protection against interference voltage from the mains Possible interferences generated in the equipment are

- Possible interferences generated in the equipment are strongly attenuated
- For standard applications
- Suitable for use in equipment according to IEC/UL 62368-1

#### Other versions on request

- Version with wire connection
- Medical Version (M80)

#### References

See below:

Alternative: Standard version

#### Weblinks

pdf data sheet, html datasheet, General Product Information, Approvals, Distributor-Stock-Check, Detailed request for product, Microsite

#### **Technical Data**

Description

- standard attenuation

- 1-stage

| iconniour Butu             |   |             |                                   |
|----------------------------|---|-------------|-----------------------------------|
| Ratings IEC                | 0.6 - 6A @ Ta 40 °C / 250 VAC; 50 Hz    | Line Filter | Standard and Medical Version, IEC |
| Ratings UL/CSA             | 0.6 - 6A @ Ta 40 °C / 125 VAC; 60 Hz    |             | 60939, UL 1283, CSA C22.2 no. 8   |
| Leakage Current            | standard < 0.25 mA (250 V / 60 Hz)      |             | Technical Details                 |
|                            | medical < 5 µA (250 V / 60 Hz)          | MTBF        | > 200'000h acc. to MIL-HB-217 F   |
| Dielectric Strength        | > 1.7 kVDC between L-N                  |             |                                   |
| -                          | > 2.7 kVDC between L/N-PE               |             |                                   |
|                            | Test voltage (2 sec)                    |             |                                   |
| Allowable Operation Tempe- | -25 °C to 85 °C                         |             |                                   |
| Climatic Category          | 25/085/21 acc. to IEC 60068-1           |             |                                   |
| Protection Class           | Suitable for appliances with protection |             |                                   |
|                            | class I acc. to IEC 61140               |             |                                   |
| Terminal                   | For PCB mounting, tin-plated            |             |                                   |
| Material: Housing          | Thermoplastic, black, UL 94V-0          |             |                                   |

#### **Approvals and Compliances**

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

## FPP-01

#### Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products. Approval Reference Type: FPP2

| Approval Logo               | Certificates  | Certification Body | Description                  |
|-----------------------------|---------------|--------------------|------------------------------|
| 10                          | VDE Approvals | VDE                | Certificate Number: 40004673 |
| c <b>RL</b> <sup>®</sup> US | UL Approvals  | UL                 | UL File Number: E72928       |

#### **Product standards**

Product standards that are referenced

| Organization | Design                | Standard        | Description  |  |  |  |
|--------------|-----------------------|-----------------|--|--|--|--|
| IEC          | Designed according to | IEC 60939       | Passive filters for suppressing electromagnetic interference |  |  |  |
| (h)          | Designed according to | UL 1283         | Electromagnetic interference filters                         |  |  |  |
| GE Group     | Designed according to | CSA C22.2 no. 8 | Electromagnetic interference (EMI) filters                   |  |  |  |

#### **Application standards**

Application standards where the product can be used

| Organization | Design                         | Standard       | Description   |
|--------------|--------------------------------|----------------|---|
| IEC          | Designed for applications acc. | IEC/UL 62368-1 | IEC 62368-1 includes the basic requirements for safety of audio, video,<br>information technology and office equipment. |
| IEC          | Designed for applications acc. | IEC 60601-1    | Medical electrical equipment - Part 1: General requirements for basic<br>safety and essential performance               |

#### Compliances


The product complies with following Guide Lines


|                | 5                            |             |   |
|----------------|------------------------------|-------------|---|
| Identification | Details                      | Initiator   | Description   |
| CE             | CE declaration of conformity | SCHURTER AG | The CE marking declares that the product complies with the applicable<br>requirements laid down in the harmonisation of Community legislation on<br>its affixing in accordance with EU Regulation 765/2008. |
| RoHS           | RoHS                         | SCHURTER AG | Directive RoHS 2011/65/EU, Amendment (EU) 2015/863  |
| 0              | China RoHS                   | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.  |
| REACH          | REACH                        | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration,<br>Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as<br>"REACH") entered into force.                               |
| 1              | Medical Equipment            | SCHURTER AG | Suitable for use in medical equipment according to IEC/UL 60601-1   |

#### **Dimension** [mm]


Case 13P

Case 18P

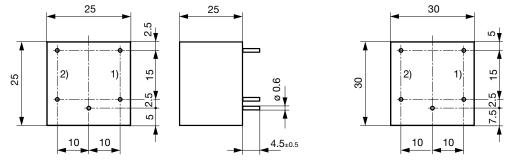




Case 24P

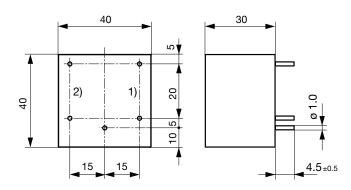

1) Line 2) Load


#### Diagrams

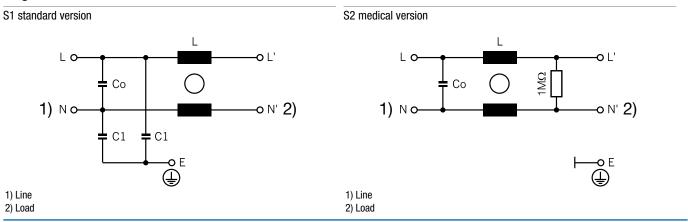

## **FPP-01**

### **Attenuation Loss**

- - - - 50 $\Omega$  differential mode \_\_\_\_\_ 50 $\Omega$  common mode

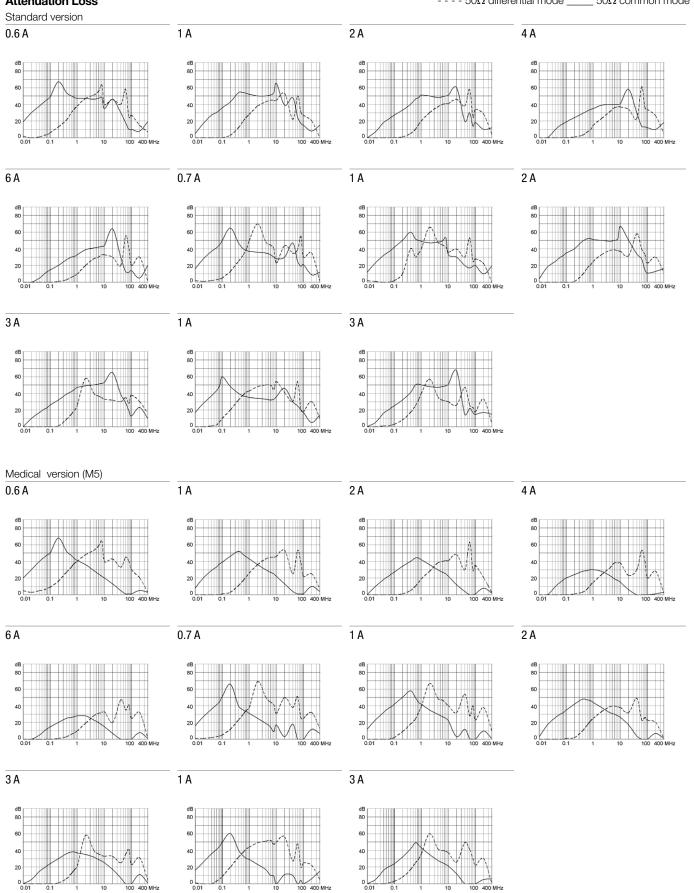

#### All Variants

| Rated Current<br>[A] | Filter-Type          | L (mH)  | Co / C2 (X2)<br>[μF] | C1 (Y2) [nF] | Diagram | Weight [g] | Hou-<br>sings | Order Number |
|----------------------|----------------------|---------|----------------------|--------------|---------|------------|---------------|--------------|
| 0.6                  | Standard version     | 2 x 40  | 0.015                | 2.2          | S1      | 27 g       | 13P           | 5500.2000    |
| 1                    | Standard version     | 2 x 10  | 0.015                | 2.2          | S1      | 27 g       | 13P           | 5500.2001    |
| 2                    | Standard version     | 2 x 4   | 0.015                | 2.2          | S1      | 27 g       | 13P           | 5500.2002    |
| 4                    | Standard version     | 2 x 1.5 | 0.015                | 2.2          | S1      | 27 g       | 13P           | 5500.2003    |
| 6                    | Standard version     | 2 x 0.8 | 0.015                | 2.2          | S1      | 35 g       | 13P           | 5500.2004    |
| 0.7                  | Standard version     | 2 x 40  | 0.015                | 2.2          | S1      | 32 g       | 18P           | 5500.2005    |
| 1                    | Standard version     | 2 x 20  | 0.022                | 2.2          | S1      | 32 g       | 18P           | 5500.2006    |
| 2                    | Standard version     | 2 x 6   | 0.022                | 2.2          | S1      | 32 g       | 18P           | 5500.2007    |
| 3                    | Standard version     | 2 x 3   | 0.022                | 2.2          | S1      | 32 g       | 18P           | 5500.2008    |
| 1                    | Standard version     | 2 x 30  | 0.047                | 2.2          | S1      | 78 g       | 24P           | 5500.2009    |
| 3                    | Standard version     | 2 x 4   | 0.047                | 2.2          | S1      | 78 g       | 24P           | 5500.2010    |
| 0.6                  | Medical Version (M5) | 2 x 40  | 0.015                | -            | S2      | 35 g       | 13P           | 5500.2116    |
| 1                    | Medical Version (M5) | 2 x 10  | 0.015                | -            | S2      | 35 g       | 13P           | 5500.2117    |
| 2                    | Medical Version (M5) | 2 x 4   | 0.015                | -            | S2      | 25.5 g     | 13P           | 5500.2118    |
| 4                    | Medical Version (M5) | 2 x 1.5 | 0.015                | -            | S2      | 35 g       | 13P           | 5500.2119    |
| 6                    | Medical Version (M5) | 2 x 0.8 | 0.015                | -            | S2      | 35 g       | 13P           | 5500.2120    |
| 0.7                  | Medical Version (M5) | 2 x 40  | 0.015                | -            | S2      | 45 g       | 18P           | 5500.2121    |
| 1                    | Medical Version (M5) | 2 x 20  | 0.022                | -            | S2      | 45 g       | 18P           | 5500.2122    |
| 2                    | Medical Version (M5) | 2 x 6   | 0.022                | -            | S2      | 45 g       | 18P           | 5500.2123    |
| 3                    | Medical Version (M5) | 2 x 3   | 0.022                | -            | S2      | 45 g       | 18P           | 5500.2124    |
| 1                    | Medical Version (M5) | 2 x 30  | 0.047                | -            | S2      | 78 g       | 24P           | 5500.2125    |
| 3                    | Medical Version (M5) | 2 x 4   | 0.047                | -            | S2      | 78 g       | 24P           | 5500.2126    |

Most Popular.

Availability for all products can be searched real-time:https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER

Packaging unit 50 Pcs

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each product selected for their own applications.

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Schurter:

| 5500.2124 | 5500.2133 | 5500.2131 | 5500.2122 | 5500.2116 | 5500.2129 | 5500.2119 | 5500.2127 | 5500.2132 | 5500.2128 |
|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 5500.2120 | 5500.2118 | 5500.2123 | 5500.2125 | 5500.2121 | 5500.2117 | 5500.2130 | 5500.2126 | 5500.2006 | 5500.2002 |
| 5500.2004 | 5500.2008 | 5500.2001 | 5500.2005 | 5500.2007 | 5500.2003 | 5500.2009 | 5500.2020 | 5500.2000 | 5500.2016 |
| 5500.2019 | 5500.2014 | 5500.2018 | 5500.2010 | 5500.2017 | 5500.2015 |           |           |           |           |