

Phone: + 381 11 78 57 600 Fax: + 381 11 63 09 644 E-mail: office@mikroe.com

Mikromedia 5 for Kinetis Capacitive FPI with frame



PID: MIKROE-3919



for Kinetis Capacitive FPI with frame







Phone: + 381 11 78 57 600 Fax: + 381 11 63 09 644 E-mail: office@mikroe.com www.mikroe.com



Rapid development of multimedia and gui-centric applications

BUILD GREAT GUI IN NO TIME







Phone: + 381 1178 57 600 Fax: + 381 11 63 09 644 E-mail: office@mikroe.com www.mikroe.com



Rich with peripherals









MIKROELEKTRONIKA D.O.O, Batajnički drum 23, 11000 Belgrade, Serbia VAT: SR105917343 Registration No. 20490918

Phone: + 381 11 78 57 600 Fax: + 381 11 63 09 644 E-mail: office@mikroe.com

Mikromedia 5 for Kinetis Capacitive FPI with frame is not limited to multimedia-based applications only. USB, WiFi and RF connectivity options, digital motion sensor, battery charging functionality, piezo-buzzer, SD card reader, RTC, and much more expands its use beyond the multimedia.

Mikromedia 5 for Kinetis CAPACITIVE FPI with frame has three mikroBUS $^{\text{TM}}$ Shuttle connectors, a brand-new addition to the mikroBUS $^{\text{TM}}$ standard in the form of a 2x8-pin IDC header with 1.27mm (50mil) pitch. mikroBUS $^{\text{TM}}$ Shuttle extension board is an add-on board equipped with the conventional mikroBUS $^{\text{TM}}$ socket, which ensures compatibility with 750+ Click boards $^{\text{TM}}$.






health and safety management system.



Time-saving embedded tools

MIKROELEKTRONIKA D.O.O, Batajnički drum 23, 11000 Belgrade, Serbia VAT: SR105917343 Registration No. 20490918

Phone: + 381 11 78 57 600 Fax: + 381 11 63 09 644 E-mail: office@mikroe.com www.mikroe.com

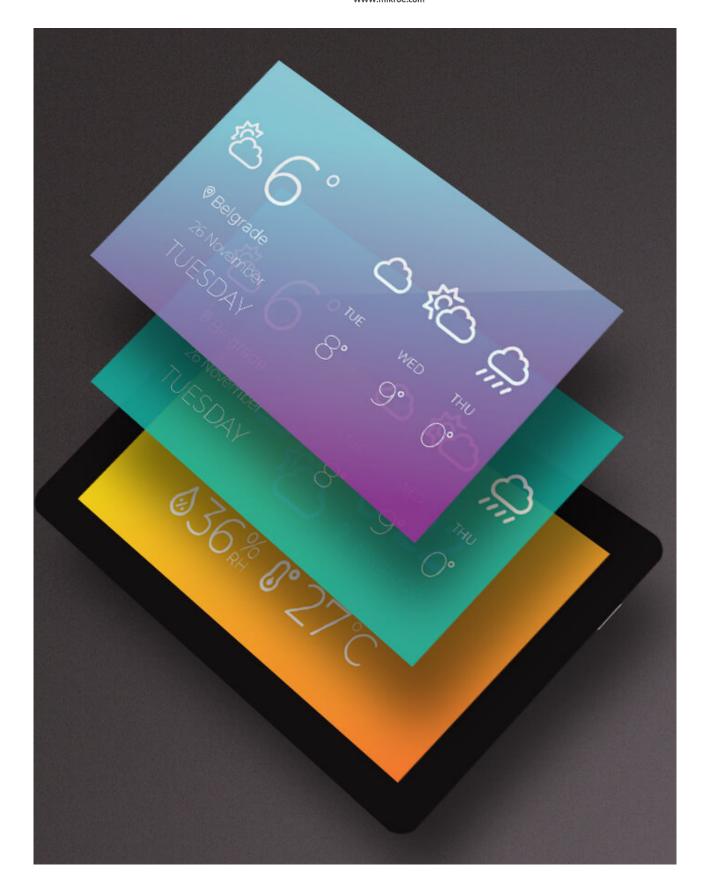











MIKROELEKTRONIKA D.O.O, Batajnički drum 23, 11000 Belgrade, Serbia VAT: SR105917343 Registration No. 20490918
Phone: + 381 11 78 57 600 Fax: + 381 11 63 09 644 E-mail: office@mikroe.com

Phone: + 381 11 78 57 600 Fax: + 381 11 63 09 644 E-mail: office@mikr www.mikroe.com

Awesome graphics on MCU driven TFT

Mikromedia 5 for Kinetis Capacitive FPI with frame is a compact development board designed as a complete solution for the rapid development of multimedia and GUI-centric applications. By featuring a 5" TFT display with capacitive touch screen driven by the powerful graphics controller that can display the 24-bit color palette (16.7 million colors), along with a DSP-powered embedded sound CODEC IC, represents a perfect solution for any type of multimedia application.







health and safety management system.



MIKROELEKTRONIKA D.O.O, Batajnički drum 23, 11000 Belgrade, Serbia VAT: SR105917343 Registration No. 20490918
Phone: + 381 11 78 57 600 Fax: + 381 11 63 09 644 E-mail: office@mikroe.com

Develop-on & build-in the same board

Mikromedia 5 for Kinetis CAPACITIVE FPI (FPI stands for Front Panel Integration) with frame is designed as the complete solution. It can be implemented directly into any project, with no additional hardware modifications. At its core, there is a powerful 32-bit MK66FX1M0VLQ18 microcontroller from NXP Semiconductors, which provides sufficient processing power for the most demanding tasks. Board has a TFT display with a frame around it and it is ideal for handheld devices. For most uses, a nice casing is all that is needed to turn this product into a high-performance, feature-rich device. This board requires the use of an external programmer and debugger, preferably CODEGRIP or mikroProg. The microcontroller can be programmed and debugged over the JTAG/SWD compatible 2x5 pin header, labeled as PROG/DEBUG.

www.mikroe.com







Phone: + 381 11 78 57 600 Fax: + 381 11 63 09 644 E-mail: office@mikroe.com

www.mikroe.com

Specifications

Туре	mikromedia 7
Architecture	ARM (32-bit)
Display size	3.5"
Resolution	800x480px
Graphic controller	SSD1963
Touch Screen	Capacitive
Silicon Vendor	NXP
Frame Type	Metal Frame

Downloads

Mikromedia 5 for Kinetis Capacitive FPI with frame example on libstock

Mikromedia 5 for Kinetis Capacitive FPI with frame manual

Mikromedia 5 for Kinetis Capacitive FPI with frame schematic

Mikromedia 5 for Kinetis Capacitive FPI with frame 2D and 3D files





health and safety management system.