

LI-IMX219-MIPI-FF-NANO SPECIFICATION

Model:

LI-IMX219-MIPI-FF-NANO-H90
LI-IMX219-MIPI-FF-NANO-H136
LI-IMX219-MIPI-FF-NANO-H145

Rev 1.4
Leopard Imaging Inc.

Contents

Version History3

Key Information.....4

Pin Assignment5

Electrical Characteristics6

1. Absolute Maximum Ratings6

2. Recommended Operating Conditions6

3. Spectral Sensitivity Characteristics6

4. DC Characteristics.....7

5. Electrical Characteristics.....7

6. AC Characteristics.....8

7. Power On Sequence9

8. Power Off Sequence.....10

Mechanical Drawing.....11



LI-IMX219-MIPI-FF-NANO SPECIFICATION

Version History

Version	Description	Release Date
1.0	First Release	16. Mar. 2019
1.1	Add H90 and H135 version	22. Mar. 2019
1.2	Update the dimensions of H90 and H135 modules	14. Apr. 2019
1.3	Remove H135 module	26. Apr. 2019
1.4	Add H136 module	18. Oct. 2019



LI-IMX219-MIPI-FF-NANO SPECIFICATION

Key Information

Module Part#		LI-IMX219-MIPI-FF-NANO
Compatible Platform		NVIDIA® Jetson Nano™ Developer Kit
Module Size	H90	150.0 mm (L) x 25.0 mm (W) x 15.27 mm(H)
	H136	150.0 mm (L) x 25.0 mm (W) x 15.3 mm(H)
	H145	150.0 mm (L) x 25.0 mm (W) x 14.1 mm(H)
Sensor Type		Sony IMX219 8.08MP Color sensor
Active Pixels		3280 (H) x 2464 (V)
Image Size		Diagonal 4.60 mm (Type 1/4.0)
F/No		2.6 (H90) / 2.0 (H136) / 2.5 (H145)
Focal Length		2.3mm (H90) / 1.58mm (H136) / 1.55 mm (H145)
FOV		90 °(H) / 136 °(H) /145 °(H)
TV Distortion		< -10% (H90) / < -15%(H136) / < -15% (H145)
Focusing Range		30cm - Infinity
Pixel size		1.12 um x 1.12 um
IR Cutter Filter		Yes
Temperature Range	Operating	-20 °C to +60 °C
	Storage	-30 °C to +80 °C
Data Output Interface		CSI-2 MIPI 2-lane
Maximum Image Transfer Rate		3280 x 2464 @ 21fps
Mating	Part#	1-1734248-5
Connector	Number of Positions	15
	Pitch	0.039" (1.00mm)



LI-IMX219-MIPI-FF-NANO SPECIFICATION

Pin Assignment

No.	Name	Pin type	Description
1	GND	Ground	
2	MDN0	O	MIPI data positive output
3	MDP0	O	MIPI data negative output
4	GND	Ground	
5	MDN1	O	MIPI data positive output
6	MDP1	O	MIPI data negative output
7	GND	Ground	
8	MCN	O	MIPI clock negative output
9	MCP	O	MIPI clock positive output
10	GND	Ground	
11	RESET	I	Reset
12	FSTROBE	O	Strobe output
13	SCL	I	
14	SDA	I/O	
15	VCC3.3V	Power	



LI-IMX219-MIPI-FF-NANO SPECIFICATION

Sensor Specifications


1. Absolute Maximum Ratings

Item	Symbol	Min.	Typ.	Max.	Unit	Remarks
Supply voltage (analogue)	V _{ANA}	-0.3		3.3	V	
Supply voltage (Core)	V _{DDL}	-0.3		2.0	V	
Supply voltage (IF)	V _{DIG}	-0.3		3.3	V	
Input voltage	V _I	-0.3		3.3	V	
Output voltage	V _O	-0.3		3.3	V	
Operating temperature (function)	T _{opr}	-20		60	°C	Junction temperature
Storage temperature	T _{stg}	-30		80	°C	Junction temperature
Performance guarantee temperature	T _{spec}	-20		60	°C	Junction temperature

2. Recommended Operating Conditions

Item	Symbol	Min.	Typ.	Max.	Unit	Remarks
Supply voltage (analogue)	V _{ANA}	2.6	2.8	3.0	V	
Supply voltage (Core)	V _{DDL}	1.08	1.2	1.3	V	
Supply voltage (IF)	V _{DIG}	1.62	1.8	1.98	V	

3. Spectral Sensitivity Characteristics

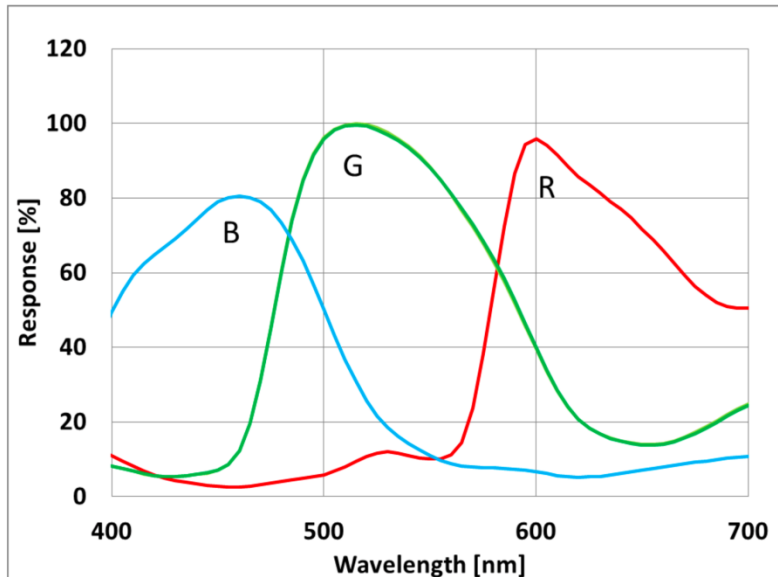

LI-IMX219-MIPI-FF-NANO SPECIFICATION

4. DC Characteristics

Item	Pins	Symbol	Min.	Typ.	Max.	Unit	Comment
Supply voltage	VDDHFIL1,2	V_{ANA}	2.6	2.8	3.0	V	
	VDDHCM1,2						
	VDDHAN						
	VDDHPL						
	VDDHSN1,2						
	VDDMCO	V_{DIG}	1.62	1.8	1.98	V	
	VDDLSC1-8	V_{DDL}	1.08	1.20	1.30	V	
	VDDL CN1,2						
	VDDLIO1,2						
Digital input/output voltage	SCL, SDA, GPO	VIL	-0.5		$0.3V_{DIG}$	V	
		VIH	$0.7V_{DIG}$		$V_{DIG} + 0.5$	V	
		VOL			$0.25V_{DIG}$	V	
		VOH	$0.75V_{DIG}$			V	
Digital output voltage	FSTROBE	VOL			0.45	V	
		VOH	$V_{DIG} - 0.45$				
Digital input voltage	XCLR, INCK	VIL	-0.3		$0.35V_{DIG}$	V	
		VIH	$0.65V_{DIG}$		$V_{DIG} + 0.3$		

5. Electrical Characteristics

($V_{ANA} = 3.0\text{ V}$, $V_{DDL} = 1.3\text{ V}$, $V_{DIG} = 1.98\text{ V}$, $T_j = 60\text{ }^\circ\text{C}$)


Item	Symbol	Min.	Typ.	Max.	Unit	Comment
Current consumption (Full, 30 frame/s)	IVAVA_strm		33	38	mA	VTmax is max speed read out from pixel array CSI2 4 lanes, V_{ANA} current
	IVDDL_strm		100	160	mA	VTmax is max speed read out from pixel array CSI2 4 lanes, V_{DDL} current Defect Correction, L.S.C. function off
HW-Standby current	ISTB_ana			50	μA	XCLR = Lo, V_{ANA} current
	ISTB_dig			10	μA	XCLR = Lo, V_{DIG} current
	ISTB_ddd			50	μA	XCLR = Lo, V_{DDL} current



LI-IMX219-MIPI-FF-NANO SPECIFICATION

6. AC Characteristics

Input specifications are shown below when square-wave inputs directly into the external pin INCK.

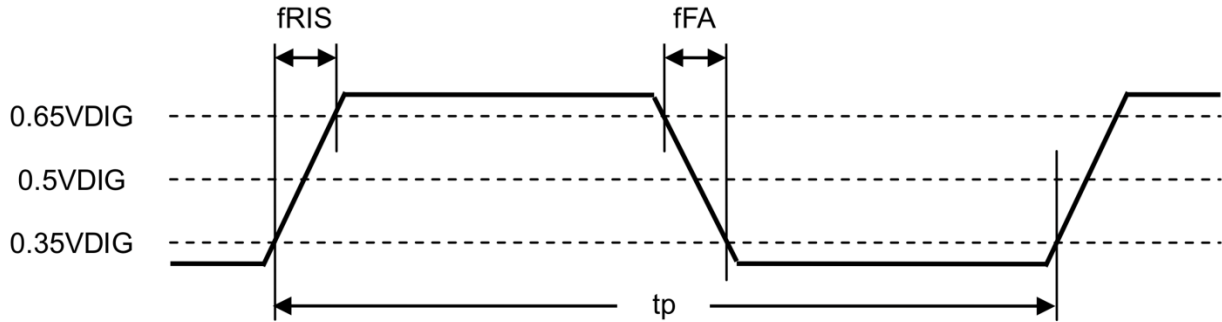


Master Clock Square Waveform Input Characteristics

Item	Symbol	Min.	Typ.	Max.	Unit	Comment
Frequency	fSCK	6	18	27	MHz	
jitter (period, peak-to-peak)	Tjitter			600	ps	
Rise Time	fRISE	1		10	ns	
Fall Time	fFALL	1		10	ns	
Duty Cycle	fDUTY	40		60	%	
Input Leakage	fILEAK	-10		10	μA	


LI-IMX219-MIPI-FF-NANO SPECIFICATION

7. Power On Sequence

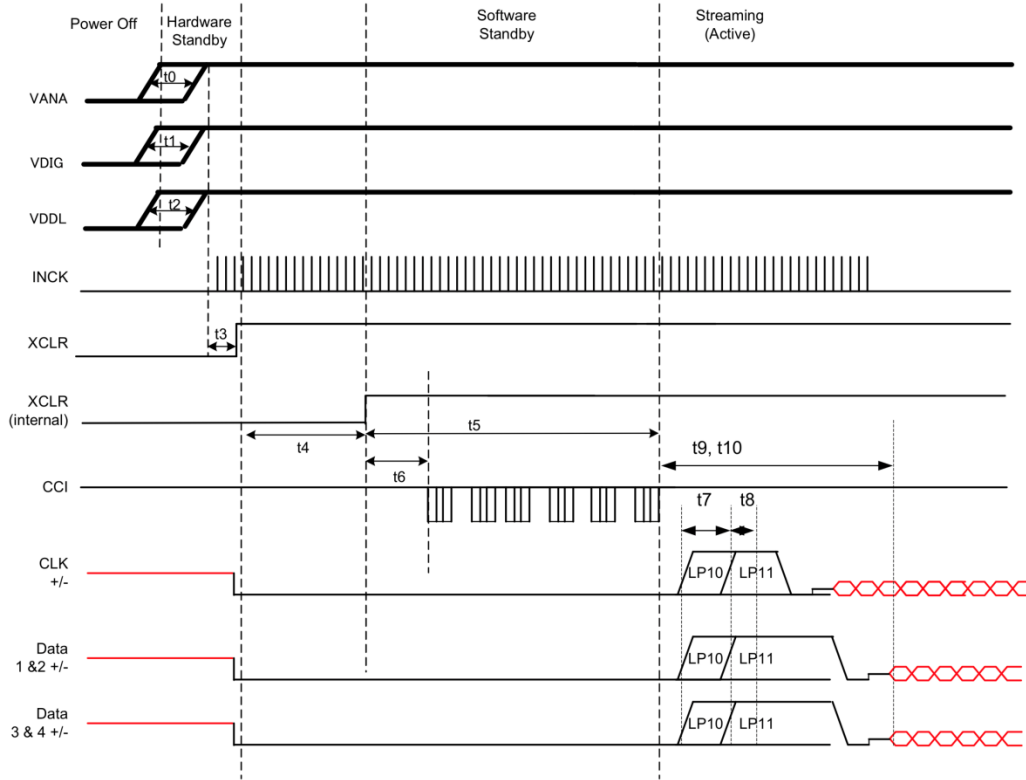

Constraint	Label	Min.	Max.	Units	Comment
Sequence free of VDDs rising	t_0, t_1, t_2	VANA, VDIG, VDDL may rise in any order.		ns	
XCLR rising	t_3	0.5	—	μ s	
Internal XCLR is Low to High after VDDs & XCLR supplied	t_4		200	μ s	
releasing software standby after XCLR Low to High	t_5	6	—	ms	charge up VRL
Initializing time of silicon	t_6	—	32000	clocks	clock is INCK Case of INCK = 6[MHz], 5.3[msec]
D-PHY power-up	t_7	1	1.1	ms	
D-PHY init	t_8	100	110	μ s	
After releasing software standby to data streaming time	t_9	1.2 ms + exposure time	—		
Quick launch up time	t_{10}	—	1	frame	stable time until optimal image quality

8. Power Off Sequence

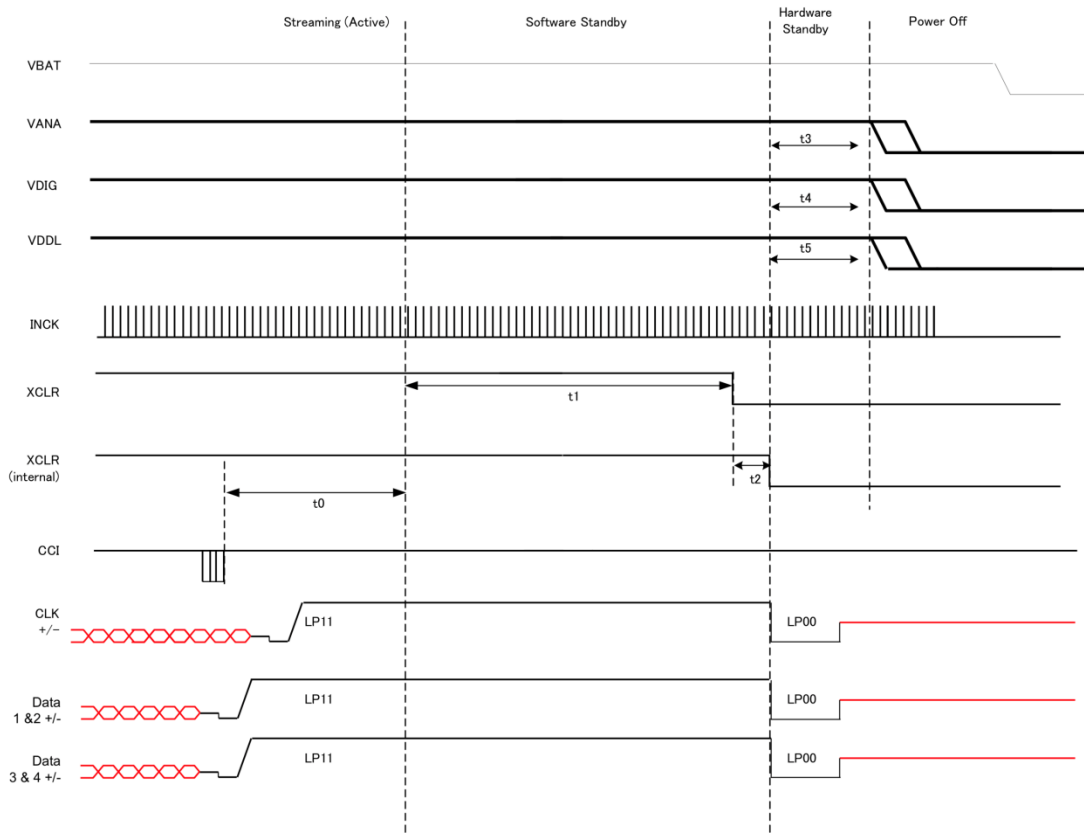



Constraint	Label	Min.	Max.	Units	Comment
Communication end – Software standby	t_0		One frame time (*1)	s	Until frame output
Software standby - XCLR H → L	t_1	0		ns	
Falling time of internal XCLR after XCLR H → L	t_2		10	μ s	
VANA falling - VDIG falling - VDDL falling	t_3, t_4, t_5		VANA, VDIG and VDDL may fall in any order.	ns	

LI-IMX219-MIPI-FF-NANO SPECIFICATION

ROHS

LI-IMX219-MIPI-FF-NANO-H90

QR-RD-F002 Rev-A

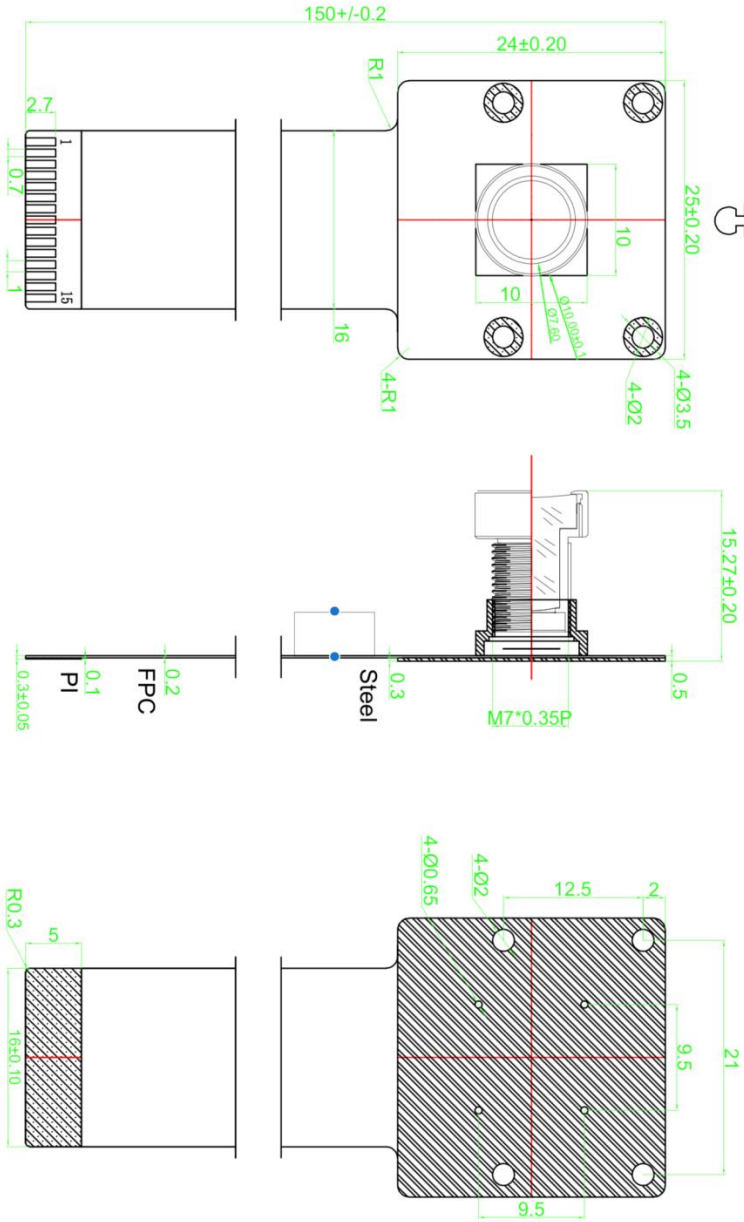

TOP VIEW
Note: # Image direction register use default settings.
Output format: RGB output

SIDE VIEW

BOTTOM VIEW

NO.	SYMBOL
1	GND
2	MDN0
3	MDP0
4	GND
5	MDN1
6	MDP1
7	GND
8	MCN
9	MCP
10	GND
11	RESET
12	FSTROBE
13	SCL
14	SDA
15	VCC3.3V

Optical Lens Specification:
Focusing Range 30cm to Infinity
Focal Length 2.3mm
F Number 2.6
Fov(H) 90°
TV Distortion <-10%


NO.	ITEM	QTY	DESCRIPTION
1	Steel	1	
2	FPC	1	
3	TAKING LENS	1	
4	Sensor	1	IMX219
5		1	
6	Test connector	1	1-1734248-5

补强: 10F1 版本: 1.2
比例: 1:1 单位: MM

NO	变更资料	版本	时间	制作:	时间:	项目名称:
	Original	V1.0	2019-02-28	Brown	2019-03-20	LI-IMX219-MIPI-FF-NANO-H90 V1.2
	Change the FPC from 2 layers to 4layers	V1.1	2019-03-09	Brown	2019-03-20	
	Change Lens and Holder	V1.2	2019-03-21	Andy	2019-03-20	



Leopard Imaging Inc.



LI-IMX219-MIPI-FF-NANO SPECIFICATION

ROHS


LI-IMX219-MIPI-FF-NANO-H145

QR-RD-F002 Rev-A



advert:
basic tolerance: ±0.1mm
label have "*"is emphasis dimension

Optical Lens Specification:
Focusing Range 30cm to Infinity
Focal Length 1.55mm
F Number 2.5
Fov(H) 145°
TV Distortion <-1.5%

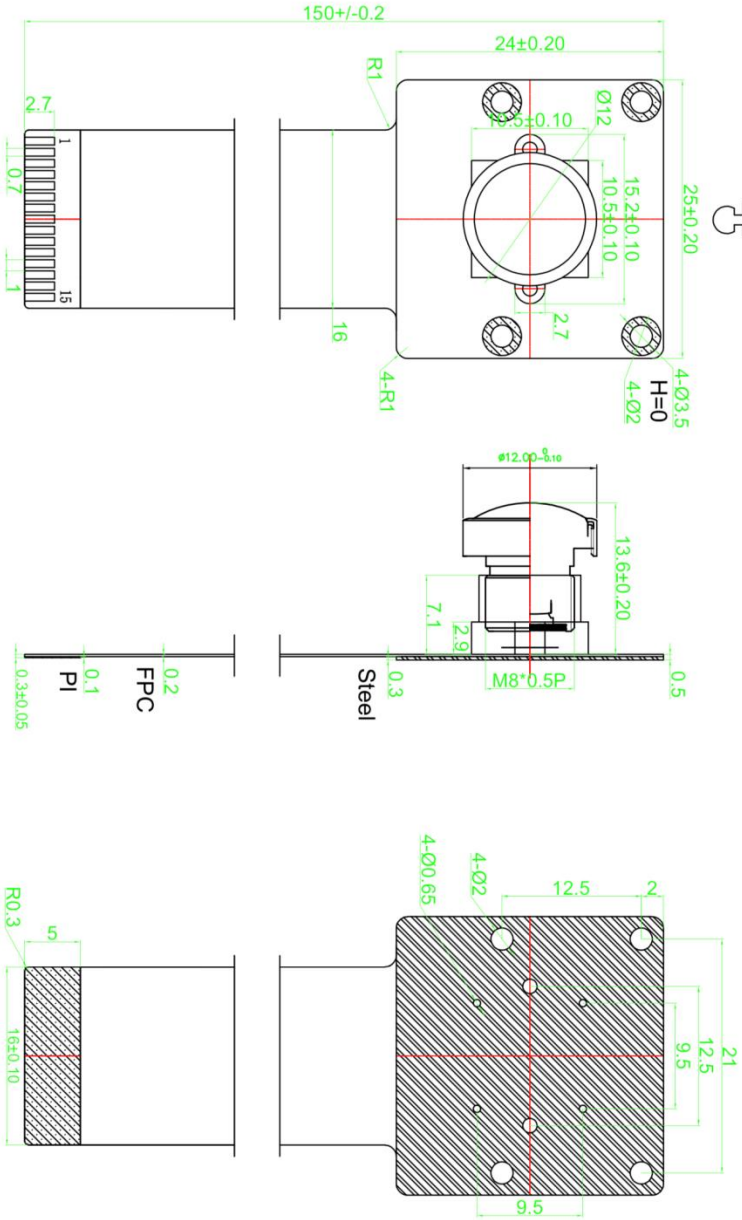

Note: # Image direction register use default settings.
Output format: RGB output FPC 4 Layers

TOP VIEW

SIDE VIEW

BOTTOM VIEW

NO.	SYMBOL	QTY	DESCRIPTION
1	GND	1	Steel
2	MDN0	1	FPC
3	MDP0	1	TAKING LENS
4	GND	1	Sensor
5	MDN1	1	Test connector
6	MDP1	1	
7	GND	1	
8	MCN	1	
9	MCP	1	
10	GND	1	
11	RESET	1	
12	FSTROBE	1	
13	SCL	1	
14	SDA	1	
15	VCC3.3V	1	


NO	变更资料	版本	时间
	Original	V1.0	2019-02-28
	Change the FPC from 2 layers to 4layers	V1.1	2019-03-09
	Change FOV and TTL	V1.2	2019-03-18



Leopard Imaging Inc.

制作:	Brown	时间:	2019-03-20	项目名称:	LI-IMX219-MIPI-FF-NANO-H145 V1.2
核查:	Brown	时间:	2019-03-20		
批准:	Andy	时间:	2019-03-20		

补强:	10F1	版本:	1.1
比例:	1:1	单位:	MM



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Leopard Imaging:](#)

[LI-IMX219-MIPI-FF-NANO](#) [LI-IMX219-MIPI-FF-NANO-H145](#) [LI-IMX219-MIPI-FF-NANO-H90](#) [LI-IMX219-MIPI-FF-NANO-H136](#)