

RCDs - DX³-ID

residual current devices 16 A to 100 A - AC, A and Hpi types




4 115 25



4 117 05



4 117 60

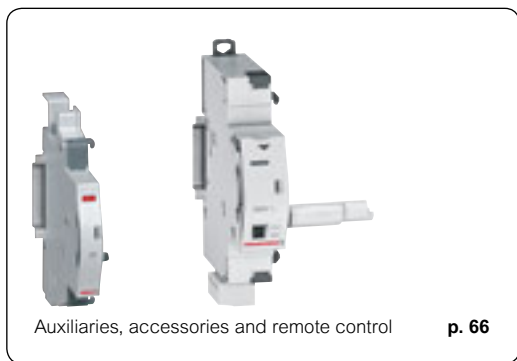

Auxiliaries, accessories and remote control

p. 66

Dimensions **see e-catalogue**
 Technical characteristics **p. 55**

Conform to IEC 61008 - 1
 • AC type : detect AC component faults
 • A type : detect AC and DC component faults
 • Hpi type (High immunity) : detect AC and DC component faults
 Enhanced immunity to unwanted tripping in disturbed environments
 Can be equipped with DX³ auxiliaries and accessories (p. 66)

Pack	Cat.Nos	2-pole - 230 V~	Number of modules
1	4 115 00	AC Type 10 mA Nominal rating In (A) 16	2
1	4 115 04	AC Type 30 mA 25	2
1	4 115 05	40	2
1	4 115 06	63	2
1	4 115 07	80	2
1	4 115 08	100	2
1	4 115 14	AC Type 100 mA 25	2
1	4 115 15	40	2
1	4 115 16	63	2
1	4 115 17	80	2
1	4 115 24	AC Type 300 mA 25	2
1	4 115 25	40	2
1	4 115 26	63	2
1	4 115 27	80	2
1	4 115 28	100	2
1	4 115 37	AC Type 100 mA selective 100	2
1	4 115 43	AC Type 300 mA selective 63	2
1	4 115 50	A Type 10 mA 16	2
1	4 115 54	A Type 30 mA 25	2
1	4 115 55	40	2
1	4 115 56	63	2
1	4 115 57	80	2
1	4 115 69	A Type 300 mA 25	2
1	4 115 70	40	2
1	4 115 71	63	2
1	4 115 72	80	2
1	4 115 90	Hpi Type 30 mA 25	2
1	4 115 91	40	2
1	4 115 92	63	2

Pack	Cat.Nos	4-pole - 400 V~ - neutral on right-hand side	Number of modules
1	4 117 02	AC Type 30 mA Nominal rating In (A) 25	4
1	4 117 03	40	4
1	4 117 04	63	4
1	4 117 05	80	4
1	4 117 12	AC Type 100 mA 25	4
1	4 117 13	40	4
1	4 117 14	63	4
1	4 117 15	80	4
1	4 117 22	AC Type 300 mA 25	4
1	4 117 23	40	4
1	4 117 24	63	4
1	4 117 25	80	4
1	4 117 32	AC Type 500 mA 25	4
1	4 117 33	40	4
1	4 117 34	63	4
1	4 117 35	80	4
1	4 117 45	AC Type 300 mA selective 40	4
1	4 117 46	63	4
1	4 117 59	A Type 30 mA 25	4
1	4 117 60	40	4
1	4 117 61	63	4
1	4 117 62	80	4
1	4 117 63	100	4
1	4 117 69	A Type 100 mA 25	4
1	4 117 70	40	4
1	4 117 71	63	4
1	4 117 72	80	4
1	4 117 73	100	4
1	4 117 79	A Type 300 mA 25	4
1	4 117 80	40	4
1	4 117 81	63	4
1	4 117 82	80	4
1	4 117 83	100	4