


**Amphenol Daeshin**  
**ORIGINAL**  
**PDF Format**  
**01 DEC 15 R&D**

Revisions				
Rev	Description	Revised	Approved	Date

1 3/16-18UNEF

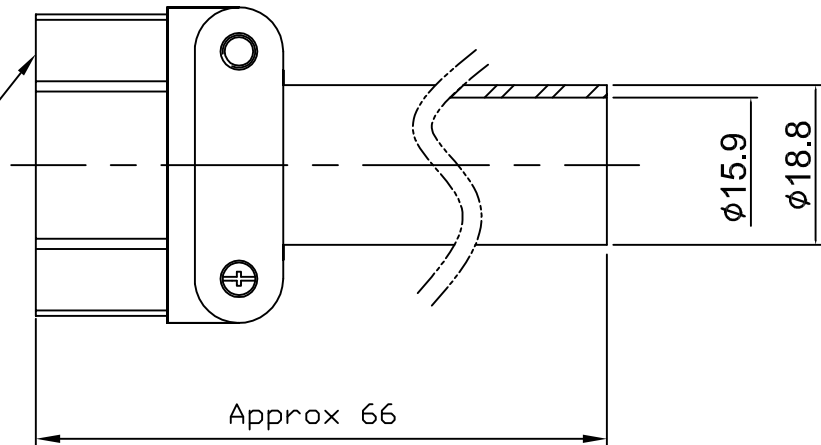

Approx 66

公差 Tolerance	~ 40	2	4
~ 30	2	3	
~ 10	1	1.5	
~ <3	0.5	1	
~ 3150	-	7	
~ 1800	4	5	
~ 800	3		
~ 400	2		
~ 200	1.5		
~ 100	1	1.5	
公差 GRADE	A	B	
铸造 CASTING (±)			
20M	8	14	24
15M	7	12	21
12M	6	10	18
8M	5	8	14
4M	4	6	11
2M	3	4	8
1M	2	3	6
315	1	2	4
120	1	2	3
30	1	1	1
公差 GRADE	A	B	C
溶接 WELDING (±)			
20M	-	8.0	8.0
15M	-	5.0	
12M	-	4.0	
8M	-	3.0	5.0
4M	0.8	2.0	4.0
2M	0.5	1.2	3.0
1M	0.3	0.8	2.0
315	0.2	0.5	1.2
120	0.15	0.3	0.8
30	0.1	0.2	0.5
~ 3	0.05	0.1	0.2
公差 GRADE	A	B	C
기계 MACHINING (±)			
汎用公差 GENERAL TOLERANCE			

No.	Description	Q'ty	Dwg. No.	Material/Finish	Remarks
Part list					

**Warning**  
 All drawings are, (1) and remain our property of Amphenol DaeShin (ADS). (2) must be returned upon request ; (3) are confidential and not to be disclosed to any person other than those to whom they are given by ADS. The furnishing of all drawings by ADS.

**NOTE**  
 1. Material/Finish  
 Body&Other Metallic part: Aluminum alloy/ Olive drab zinc plated  
 Rubber bushing: Synyhe.rubber

Next assembly	Tolerance	GRADE - A	Approved	TH.KIM	<b>Amphenol DaeShin</b>
		GRADE - B	Checked	TH.KIM	
		GRADE - C	Drawn	HO.KWON	
	Material	-	Designed	HO.KWON	Title
	Alt. Material	-	Date 2015.12.01		MS3057-12A
Customer	Finish	-	R & D Dept.		Dwg. No. CMA-10-20
	Heat treatment	-	Scale	Unit mm	Weight g
					1 of 1