



SoniCrest SPEAKER SOUND GENERATORS

HSB28A-8



Dimension

Unit: mm
Tolerance : 0.3mm

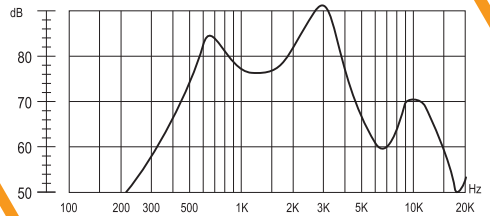

Frequency Response

Normalized to 1W Input Power and
1m Measuring Distance

● Specification (all data taken at 25°C unless otherwise specified)

Coil Impedance (Ω)	Rated Power (W)	Maximum Input Power (W)	Resonance Frequency (Hz)	★Frequency Range (Hz)	★Sound Output at 1kHz(dB)	Operating Temp. (°C)	Storage Temp. (°C)
8 ± 15%	0.1	0.2	600 ± 20%	600 ~ 3500	78 ± 3	-10 ~ +40	-10 ~ +40


HSB28A-8

The specifications are only for 8Ω version. Specification for other impedance is available upon request.


★ Value normalized to 1W input power and 1m measuring distance

Dimension

Unit: mm
Tolerance : 0.3mm



HSB30A-8

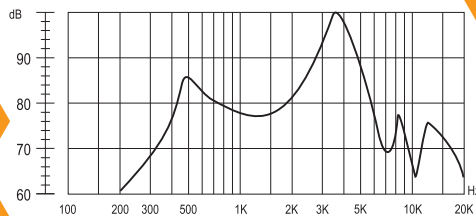

Frequency Response

Normalized to 1W Input Power and
1m Measuring Distance



● Specification (all data taken at 25°C unless otherwise specified)

Coil Impedance (Ω)	Rated Power (W)	Maximum Input Power (W)	Resonance Frequency (Hz)	★Frequency Range (Hz)	★Sound Output at 1kHz(dB)	Operating Temp. (°C)	Storage Temp. (°C)
8 ± 15%	0.1	0.2	550 ± 20%	550 ~ 5000	80 ± 3	-10 ~ +40	-10 ~ +40

HSB30A-8

The specifications are only for 8Ω version. Specification for other impedance is available upon request.



★ Value normalized to 1W input power and 1m measuring distance

HSB36C-8



Dimension

Unit: mm
Tolerance : 0.3mm

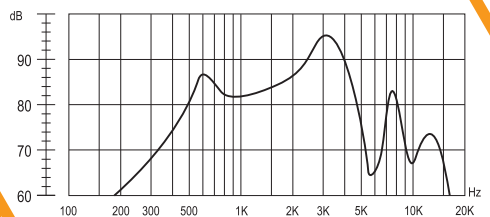

Frequency Response

Normalized to 1W Input Power and
1m Measuring Distance

● Specification (all data taken at 25°C unless otherwise specified)

Coil Impedance (Ω)	Rated Power (W)	Maximum Input Power (W)	Resonance Frequency (Hz)	★Frequency Range (Hz)	★Sound Output at 1kHz(dB)	Operating Temp. (°C)	Storage Temp. (°C)
8 ± 15%	0.2	0.4	500 ± 20%	1000 ~ 3500	83 ± 3	-10 ~ +40	-10 ~ +40

HSB36C-8

The specifications are only for 8Ω version. Specification for other impedance is available upon request.

★ Value normalized to 1W input power and 1m measuring distance.