

## Han 1A-5+PE-c-m latch

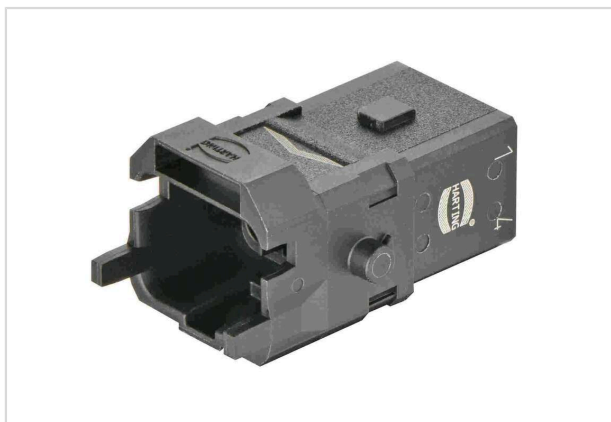


Image is for illustration purposes only. Please refer to product description.

Part number	09 10 005 3001
Specification	Han 1A-5+PE-c-m latch
HARTING eCatalogue	<a href="https://b2b.harting.com/09100053001">https://b2b.harting.com/09100053001</a>

### Identification

Category	Inserts
Series	Han <sup>®</sup> 1A

### Version

Termination method	Crimp termination
Gender	Male
Size	1 A
Number of contacts	5
PE contact	Yes
Locking type	Snap-in latches
Details	Please order crimp contacts separately. Order separately the single wire seal or the hoods/housings for an IP65 performance.

A Han<sup>®</sup> 1A configuration that only consists of inserts (with or without strain relief, 09 10 000 5300) is an unenclosed connector according to IEC 61984. In this case protection against electric shock must be provided by the installation methods of the user.

Contact inserts must not be coupled or decoupled under electrical load.  
Contact inserts must not be powered-up in the un-mated condition.

### Technical characteristics

Conductor cross-section	0.14 ... 2.5 mm <sup>2</sup>
Rated current	10 A
Rated voltage	400 V
Rated impulse voltage	6 kV
Pollution degree	3

Page 1 / 3 | Creation date 2024-01-09 | Please note that the data specified here were taken as extracts from the online catalogue. Please refer to the user documentation for the complete and up-to-date information and data. Please also note that the user is responsible for validating functionality, conformity with applicable laws and directives, as well as for the electrical safety in the particular application.

HARTING Electric Stiftung & Co. KG | Wilhelm-Harting-Straße 1 | 32339 Espelkamp | Germany  
Phone +49 5772 47-97100 | [electric@HARTING.com](mailto:electric@HARTING.com) | [www.HARTING.com](http://www.HARTING.com)



Pushing Performance  
Since 1945

## Technical characteristics

Rated current acc. to UL	15 A AWG 14
Rated voltage acc. to UL	600 V
Insulation resistance	$>10^8 \Omega$
Limiting temperature	-30 ... +90 °C
Mating cycles	$\geq 100$
Degree of protection acc. to IEC 60529	IP20

## Material properties

Material (insert)	Polyamide (PA)
Colour (insert)	RAL 9005 (jet black)
Material flammability class acc. to UL 94	V-0
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Not contained
California Proposition 65 substances	Not contained
Fire protection on railway vehicles	EN 45545-2 (2020-08)
Requirement set with Hazard Levels	R22 (HL 1-3) R23 (HL 1-3)

## Specifications and approvals

Specifications	EN 45545-2 Fire protection on railway vehicles
	IEC 61373 Category 1 Class B
	IEC 60664-1
	IEC 61984
UL / CSA	UL 1977 ECBT2.E235076
	CSA-C22.2 No. 182.3 ECBT8.E235076
	Please contact your local HARTING subsidiary for further information.
Approvals	DNV GL

## Commercial data

Packaging size	1
Net weight	9 g
Country of origin	Germany



**Pushing Performance**  
Since 1945

## Commercial data

European customs tariff number	85366990
GTIN	5713140185562
ETIM	EC000438
eCl@ss	27440205 Contact insert for industrial connectors