Downloaded from Arrow.com.

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	PKG.	STUD SIZE	DIMENSIONS in.				
			A ±.03	W ±.01	C ±.02	M ±.03	H ±.01
P2-10R	-X -T	#10	1.46 (37,1)	.68 (17,3)	.58 (14,7)	1.12 (28,5)	.20 (5,1)
P2-14R	-X -T	1/4"	1.46 (37,1)	.68 (17,3)	.58 (14,7)	1.12 (28,5)	.27 (6,9)
P2-56R	-X -T	5/16"	1.46 (37,1)	.68 (17,3)	.58 (14,7)	1.12 (28,5)	.33 (8,4)
P2-38R	-X -T	3/8"	1.46 (37,1)	.68 (17,3)	.58 (14,7)	1.12 (28,5)	.39 (9,9)
P2-12R *	-X -T	1/2"	1.55 (39,4)	.86 (21,8)	.58 (14,7)	1.12 (28,5)	.52 (13,2)

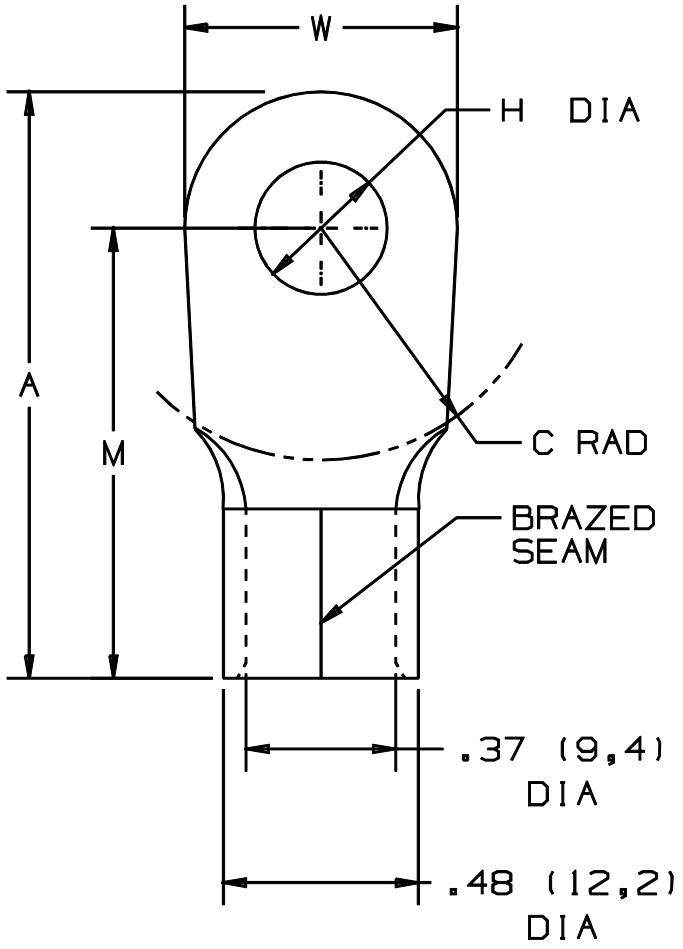

NOTES:

1. UL LISTED AND CERTIFIED FOR:
   A. 347° F (175° C) MAX OPERATING TEMP
   B. #2 AWG STRANDED COPPER WIRE
2. PACKAGE QTY: STD. PKG.-X=10
   BULK PKG.-T=200
3. MATERIAL: .060" (1,52) THK COPPER, TIN PLATED
4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
5. INSTALLATION TOOL: CT-700 (OBSOLETE), CT-1701
6. WIRE STRIP LENGTH: 7/16 $^{+1/32}_{-0}$ (11,11 $^{+,8}_{-0}$)

LISTED
587H
E52164

CERTIFIED
LR31212

• P2-12R NOT CSA CERTIFIED

A41212_03

REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM
03	3/01	EJS		ADDED PACKAGE CODE TO CHART, ADDED CT-1701, ADDED "OBSOLETE" TO NOTE 5, FILE SPEC WAS N41212AA_PCD_02, METRIC DIM. WERE 2 PLACES			
02	11/94	TH	RLS	UPDATED NOTES AND DIMENSIONS	02669	LA	TFKE
1	7-88	DW		REDRAWN WITH REVISIONS			

PANDUIT CORP. TINLEY PARK, ILLINOIS

#2 BARREL NON-INSULATED RING TONGUE

DRAWN BY	CHK'D	SCALE	DRAWING NO.
DAW	RLS	NONE	A41212