
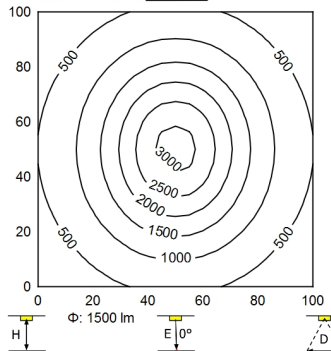


BS 1363 A

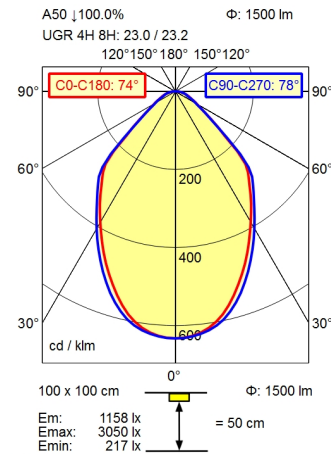

Height (m)	Beam Angle	Illuminance (lx)	Beam Diameter (m)
0.25	CO-C180: 74° / C90-C270: 78°	15191 lx	0.38 m   0.41 m
0.50		3798 lx	0.76 m   0.81 m
0.75		1688 lx	1.14 m   1.22 m
1.00		949 lx	1.52 m   1.63 m

- light source
- work equipment
- connected load
- power consumption
- luminous flux
- luminous efficiency
- light type/-color
- colour temperatur
- color rendering index
- light distribution
- direct ratio
- beam angle
- chromaticity tolerance LED
- luminance (L65)
- unified glare rating (4H 8H)
- system of protection
- class of protection
- operation
- housing
- cover
- arm
- balance of articulation joints
- mains lead
- fastening
- decorative contrast side parts

- LED
- electronic transformer
- 100-240 V, 50/60 Hz; secondary 24 V, DC
- env. 23 W
- approx. 1.500 lm
- approx. 79 lm/W
- cold white
- approx. 4.000 K
- CRI > 90; R9 > 50
- direct
- approx. 100 %
- 75°
- < 3 SDCM
- <= 12000 cd/m<sup>2</sup>
- <= 25
- IP 20
- I with plug-in power supply; III without plug-in power supply
- multi-function switch
- aluminium coloured anodised
- structured; plastic
- silver metallic
- spring
- ca. 3,40 m; mains plug; BS 1363 A
- table base
- black

