


## Three Phase Superior Performance EMI Filter – Book Shelf Type Single Stage WYE Configuration

### DATASHEET

Book shelf design for motor drive applications requiring minimum space and convenient installation with superior performance at significant interference levels

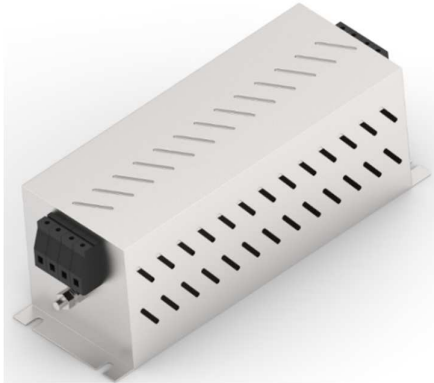

### Approvals & Compliance

UL Recognised \*

CSA Certified \*\*

\*31<sup>st</sup> July 2020


\*\*31<sup>st</sup> August 2020



### Features

- Superior Performance
- Book Shelf Design
- Chassis mounting with neutral

### Typical Circuit Diagram



### Applications

- Industrial Automation
- HVAC
- Robotics
- CNC Machines

### Specifications

#### Electrical Characteristics

Maximum Continuous Operating Voltage	440/520VAC
Current Ratings	7A to 150A @40°C
Operating Frequency	50/60Hz
High Potential Test Voltage -440VAC	Line to Ground 2632VDC for 1 Minute Line to Line 1892VDC for 1 Minute
High Potential Test Voltage -520VAC	Line to Ground 2856VDC for 1 Minute Line to Line 2236VDC for 1 Minute
Overload Capability	135% of Rated current for 15 minutes

#### Functional Characteristics

Operating Temperature Range	-25°C to +85°C
Climatic Category	25/85/21
Termination	Shock Proof
Flammability corresponding to	UL 94 V-0


#### Reference Standards

Design Corresponding to	UL 60939-3 and CSA 22.2 No.8-13
-------------------------	---------------------------------


# KEP-BS SERIES



## Selection Table

TE Ordering Number	Catalog Number	Rated Current @40°C	Rated Voltage @40°C	Leakage Current (mA)	Termination 	Weight (Kgs)
2-1609968-7	7KEPS10ABSW	7A	440 VAC	5	41	0.8
3-1609968-0	16KEPS10ABSW	16A	440 VAC	5	41	0.9
3-1609968-1	30KEPS10ABSW	30A	440 VAC	5	41	1.2
3-1609968-2	42KEPS10ABSW	42A	440 VAC	6	10	1.2
3-1609968-3	55KEPS10ABSW	55A	440 VAC	6	10	1.6
3-1609968-4	75KEPS10ABSW	75A	440 VAC	6	16	2
3-1609968-5	100KEPS10ABSW	100A	440 VAC	11	25	2.2
3-1609968-6	125KEPS10ABSW	120A	440 VAC	11	50	4
3-1609968-7	150KEPS10ABSW	150A	440 VAC	11	50	5
5-1609968-7	7KEPS10BBSW	7A	520 VAC	5	41	0.8
6-1609968-0	16KEPS10BBSW	16A	520 VAC	5	41	0.9
6-1609968-1	30KEPS10BBSW	30A	520 VAC	5	41	1.2
6-1609968-2	42KEPS10BBSW	42A	520 VAC	6	10	1.2
6-1609968-3	55KEPS10BBSW	55A	520 VAC	6	10	1.6
6-1609968-4	75KEPS10BBSW	75A	520 VAC	6	16	2
6-1609968-5	100KEPS10BBSW	100A	520 VAC	11	25	2.2
6-1609968-6	125KEPS10BBSW	120A	520 VAC	11	50	4
6-1609968-7	150KEPS10BBSW	150A	520 VAC	11	50	5

## Connectors Cross Section


	41	10	16	25	50
Wire Section (mm <sup>2</sup> )	4mm <sup>2</sup>	10 mm <sup>2</sup>	16 mm <sup>2</sup>	25 mm <sup>2</sup>	50 mm <sup>2</sup>
Wire Section (AWG)	12AWG	8 AWG	6 AWG	4 AWG	1/0 AWG
Wire Stripping	Max 10mm	max 13.5 mm	max 17 mm	max 17 mm	max 20 mm
Max Recommended Torque	0.5 Nm / 4.5 in.lbs	1.2 Nm / 10.8 in.lbs	2÷2.2 Nm / 18÷19.8 in.lbs	2 Nm / 18 in.lbs	6 Nm / 54 in.lbs

## Insertion Loss (Typical) – Measured in Closed 50Ω System


		Common Mode 50Ω / 50Ω								
		Frequency in MHz								
		0.01	0.05	0.15	0.5	1	3	5	10	30
Current Rating	7A	22	18	48	60	70	65	58	31	11
	16A	20	25	56	64	75	70	60	31	11
	30A	21	23	35	61	67	50	43	37	19
	42A	35	42	55	54	52	48	34	24	10
	55A	32	40	55	56	52	48	34	24	12
	75A	30	35	48	60	64	57	30	22	15
	100A	24	24	29	56	46	50	54	23	12
	125A	25	25	32	55	45	32	28	22	12
	150A	24	25	31	50	41	30	26	21	13

		Differential Mode 50Ω / 50Ω								
		Frequency in MHz								
		0.01	0.05	0.15	0.5	1	3	5	10	30
Current Rating	7A	24	22	63	50	67	60	56	70	50
	16A	32	40	63	60	70	65	60	50	60
	30A	28	29	38	75	67	59	48	21	24
	42A	32	40	50	65	62	68	62	40	18
	55A	32	41	52	68	62	68	56	40	16
	75A	27	32	41	56	68	60	49	38	19
	100A	17	20	23	42	40	52	58	20	20
	125A	44	45	49	48	40	31	25	17	16
	150A	42	43	47	48	41	30	24	18	18

## Common Mode Insertion Loss (Typical in dB – refer to Table above)

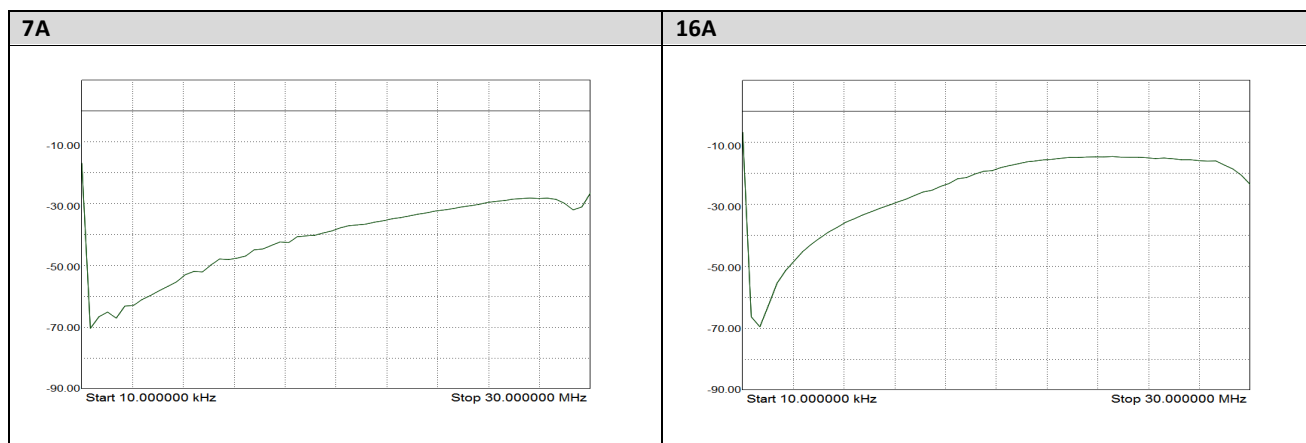


# KEP-BS SERIES

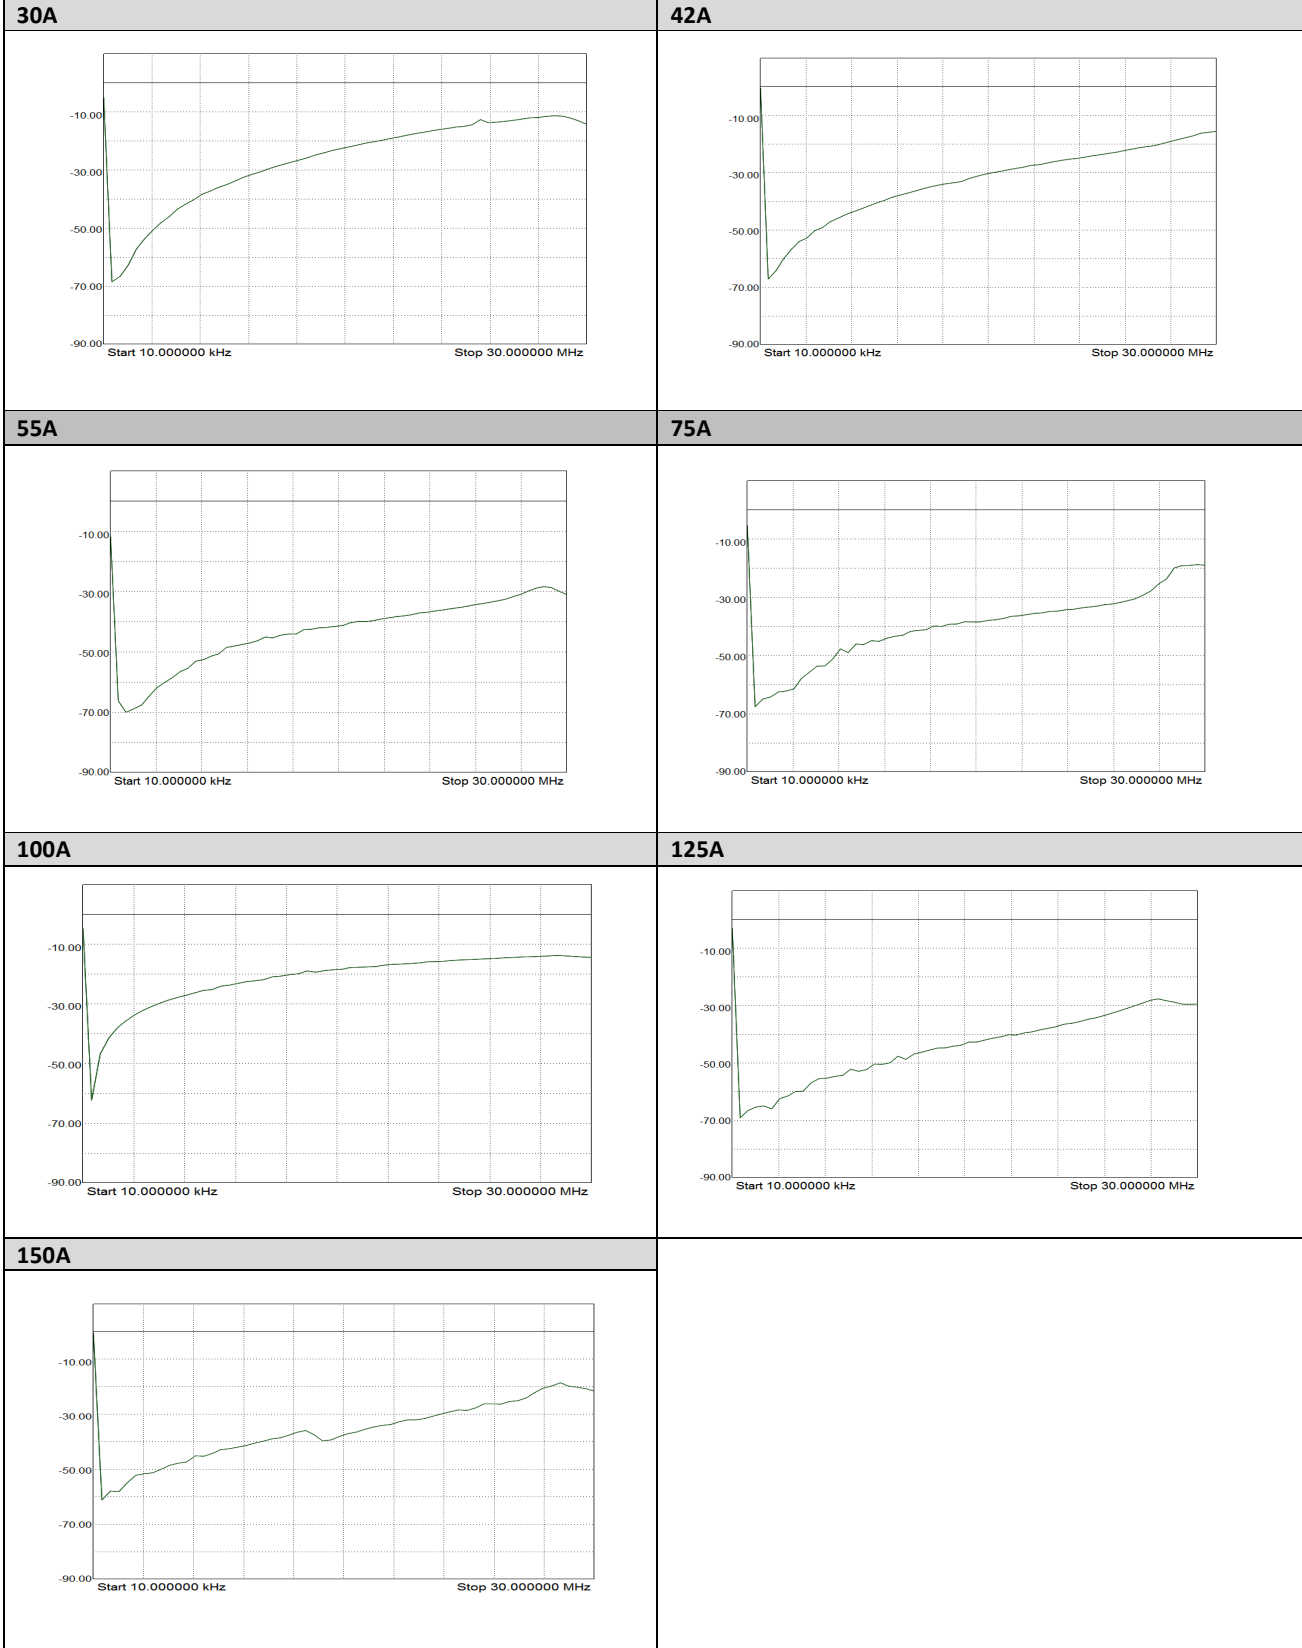


# KEP-BS SERIES



## Case Dimensions

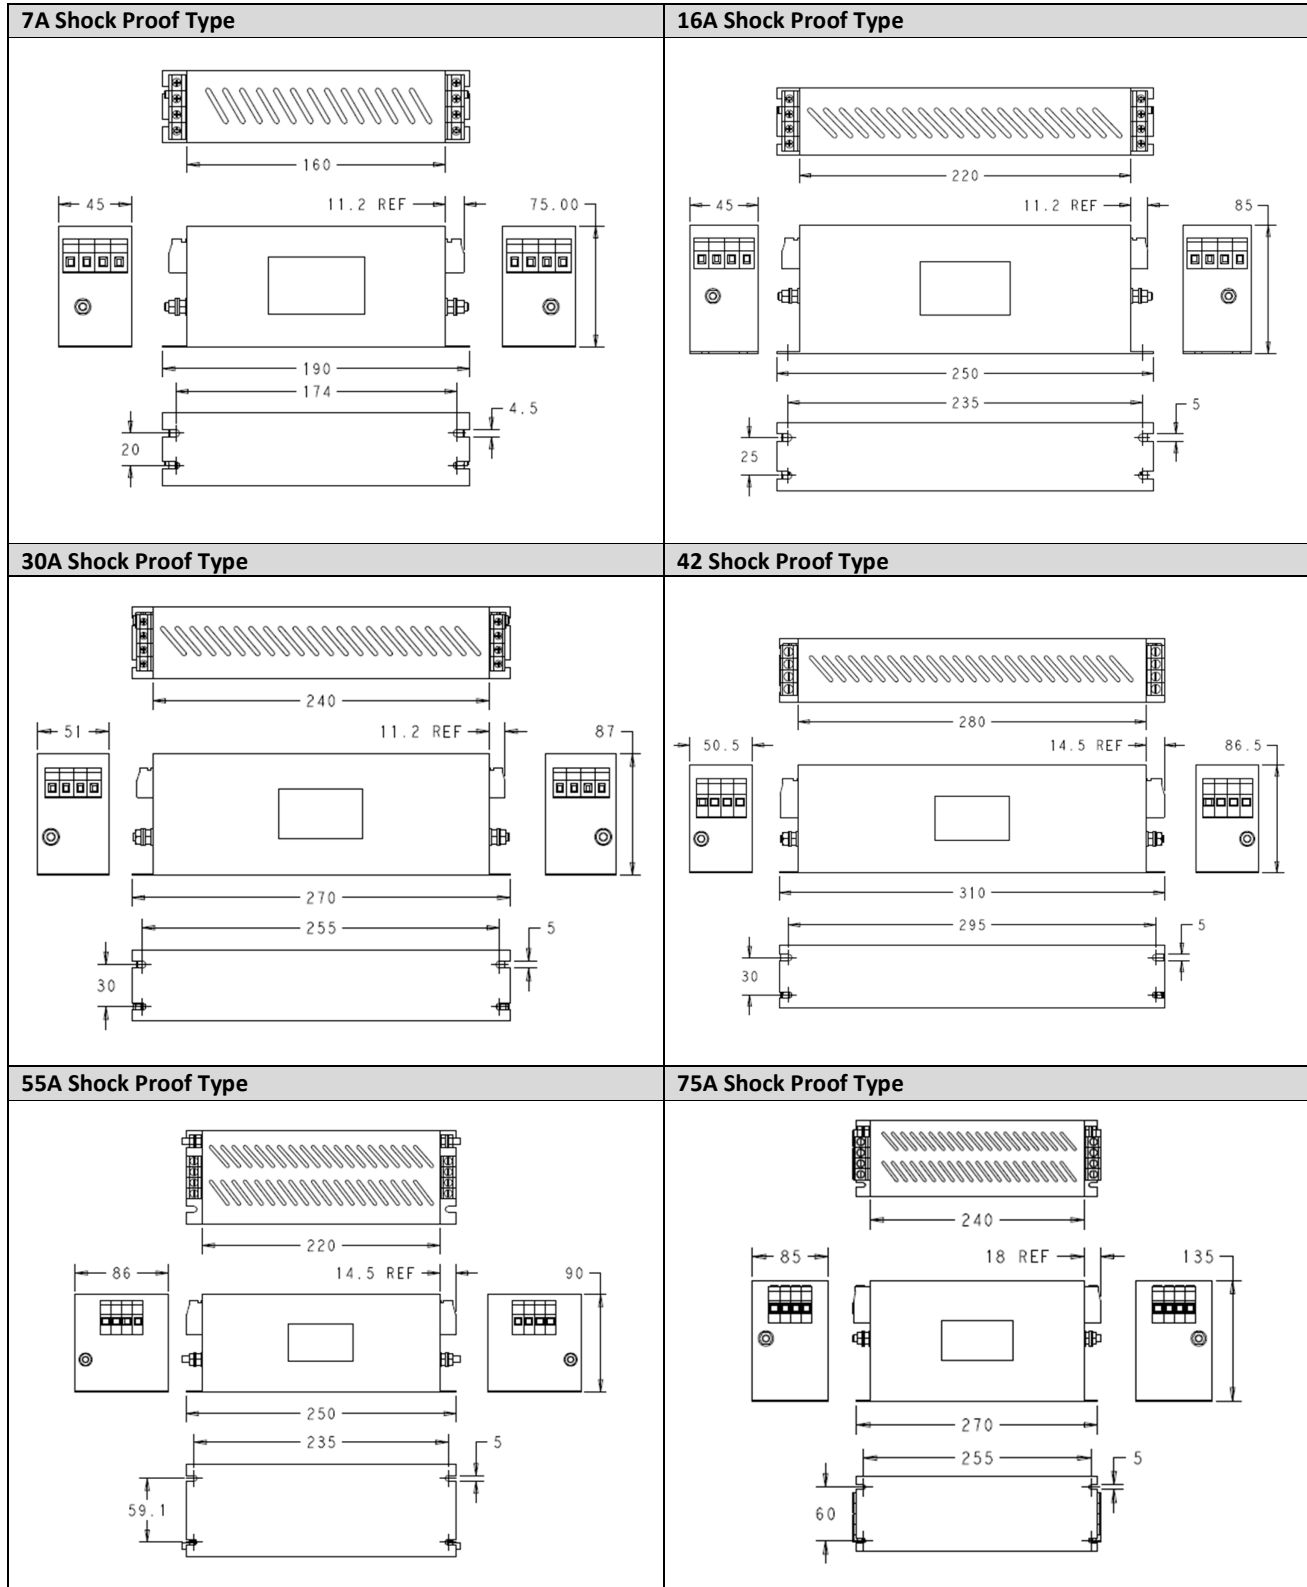

# KEP-BS SERIES

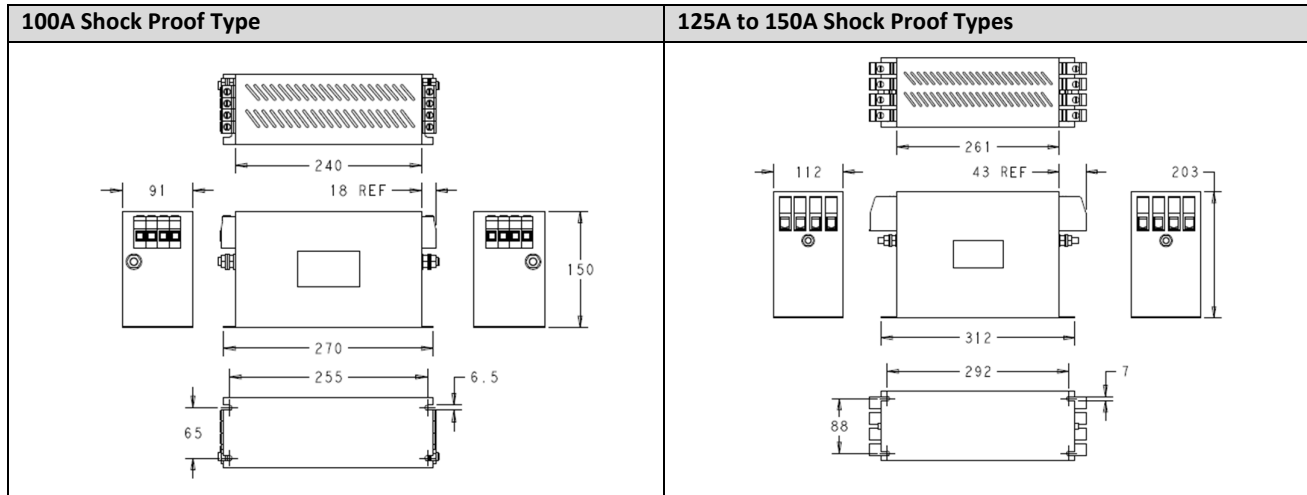

All dimensions in mm; Tolerances according: ISO2768-m

## How to Order

