

Overview

Introduction



HDMI Signal Extender, 1080P high-definition & lossless transmission, transmission distance up to 50m via CAT-5E/6 network cable.


Feature

- Transmission standard: HDMI1.4B
- Max. transmission distance: 50M (CAT-6 is recommended)
- Supported resolution: 1080p/1080i/720p/576p/576i/480p/480i
- Support color depth 10/12/16-bit mode
- Support DVI/HDMI
- Power input: DC 5V 1A

User Guide

1. Connect the HDMI signal source to the HDMI input port of the transmitter.
2. Connect the HDMI output port of the receiver to the HDMI transmitter, such as the display device.
3. Connect the transmitter and the receiver via a network cable.
4. Respectively connect the transmitter and receiver to the DC 5V 1A power supply.
5. Connect to the HDMI output device.

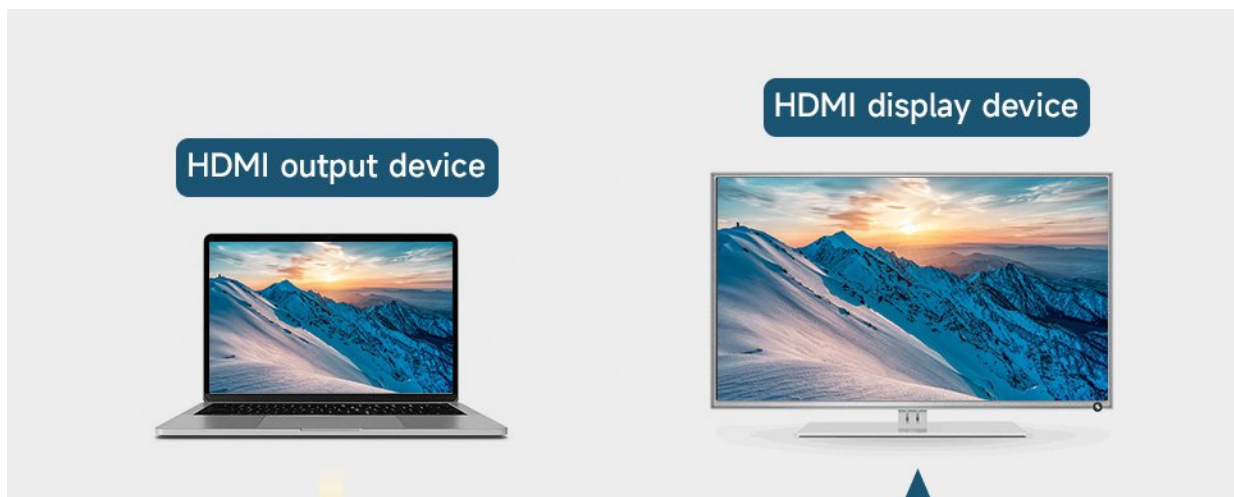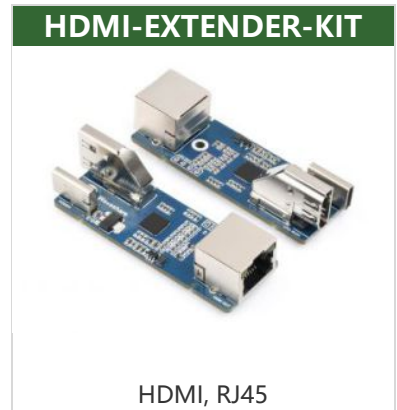

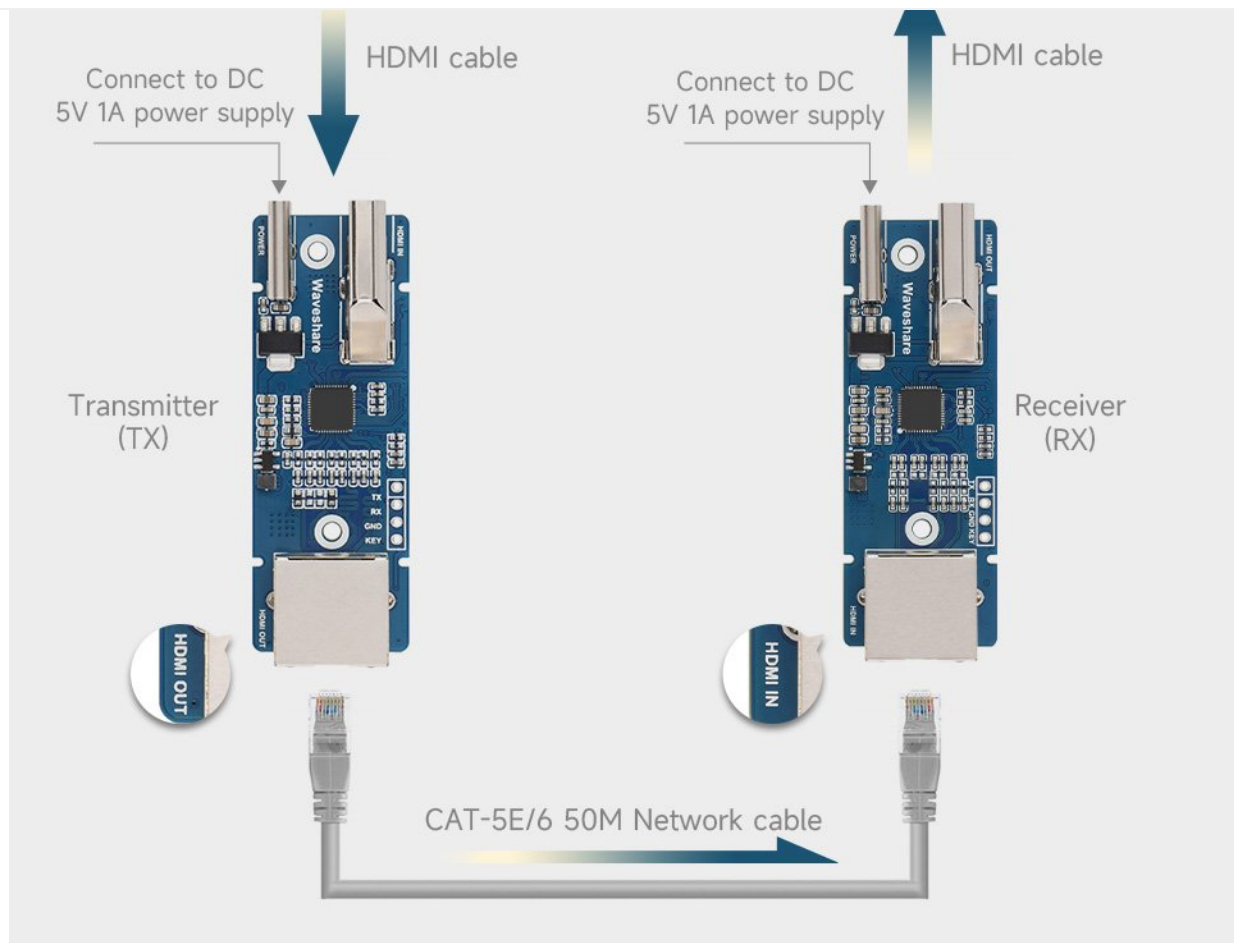

Note: The quality of network cables will affect the transmission quality of signals. To achieve better transmission quality, CAT-6 network cables are recommended.

Resource

FAQ

Technical Support

If you need technical support or have any feedback/review, please click the **Submit Now** button to submit a ticket, Our support team will check and reply to you within 1 to 2 working days. Please be patient as we make every effort to help you to resolve the issue.

Working Time: 9 AM - 6 AM GMT+8 (Monday to Friday)

[Submit Now](#)