



Bestückungsplan / contact layout

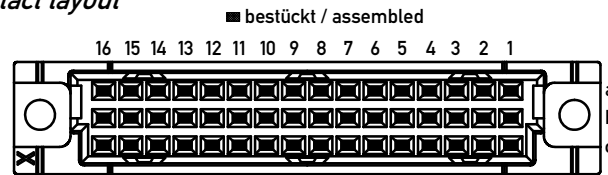

Leiterplatten-Lochbild / PCB drillhole Pattern

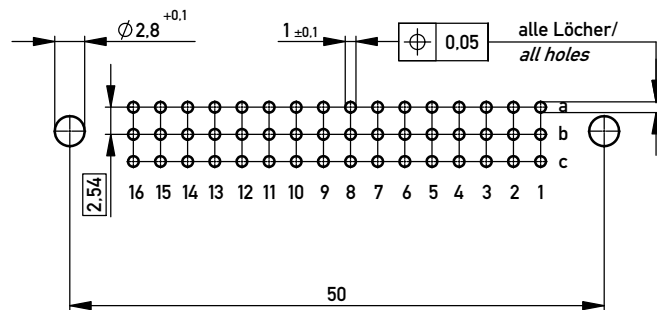

THR=through hole reflow



Isolierwerkstoff / housing material : schwarz / black

Bauart 7 / type 7

Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles

Fehlende Masse und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing Information and dimensions per IEC 60 603-2

Information:		Tolerances		Scale	2:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		All Dimensions in mm		Designation	
Subject to modification without prior notice. Drawing will not be updated.		www.ERNI.com		Federleiste C/2 48 THR Fem. Connector C/2 48 THR	
		www.ERNI.com		244810	
c	23.08.2013	Date		I	
Index		Date		A3	
Class				STVC/2	

Copyright by ERNI GmbH. Proprietary notice pursuant to ISO 9006 to be observed.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[244810](#)