



Bestückungsplan / contact layout

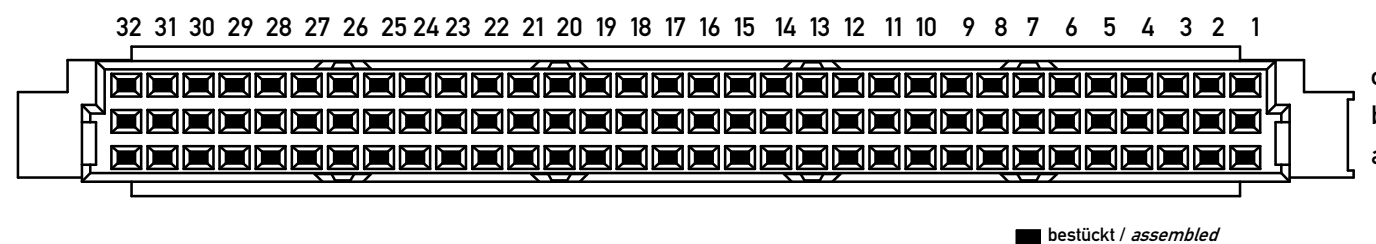

Elastische Einpresszone / *compliant pressfit zone*
 Isolierwerkstoff / *housing material* : PBT GF 30
 Bauart 7 / *type 7*
 Anforderungsstufe 2 = 400 Steckzyklen / *performance class 2 = 400 mating cycles*
 Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2
 Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2
 Schichtaufbau im metallisierten Loch siehe Zeichnung 164062 Nr.6
diameter of drilled hole see drawing 164062 No.6

- 1) $\phi 1.0^{+0.09}_{-0.06}$ Durchmesser des metallisierten Loches
- $\phi 1.0^{+0.09}_{-0.06}$ Diameter of finished plated-through hole

Leiterplatten-Lochbild / PCB drillhole pattern

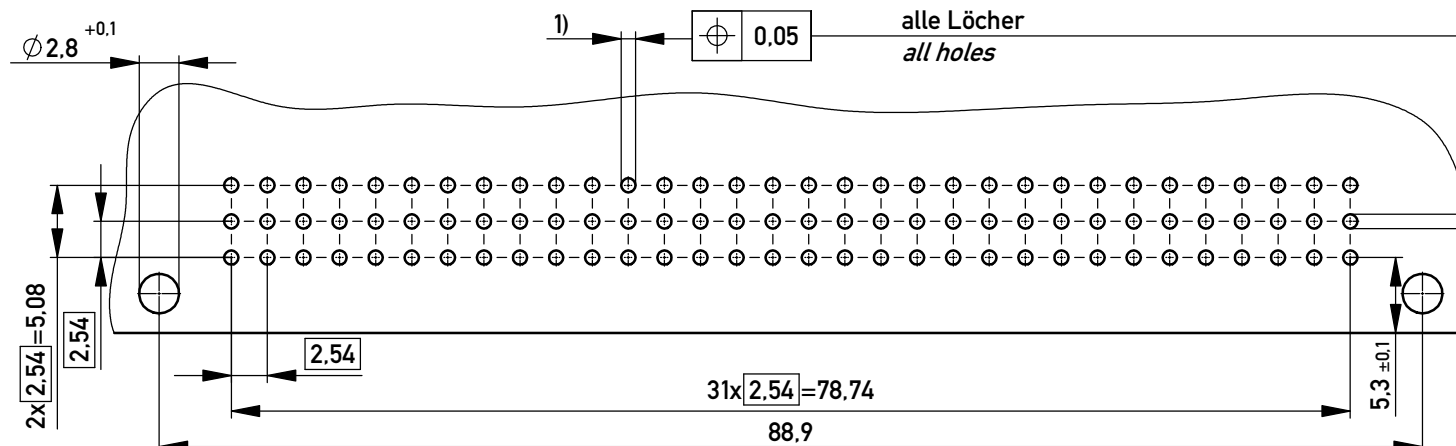

Information: mit Pressteil / <i>with pressed-in cover</i> Im Tray verpackt / <i>tray packaging</i>	Tolerances	All Dimensions in mm	Scale	2:1
	All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.	Designation Federleiste R 96 EE Fem. Connector R 96 Pressfit
Copyright by ERNI Production GmbH & Co. KG Proprietary notice pursuant to ISO 16016 to be observed.	www.ERNI.com		284260	I A3
c Index	30.05.2017 Date		Class STVR	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[284260](#) [284260-E](#)