REVISION A REVISED AND REDRAWN ON CAD/CAM 11/28/95 TS

REV. Status


REVISION B ADDED RoHS 12/05/05 MP

REVISION C NOTE 9: 1000Vrms WAS 500Vrms 05/05/06 MP

REVISION D ADDED TEMP **RATING** 5/5/15 MP

AUDIO COUPLING MINIATURE ENCAPSULATED TRANSFORMER DESIGNED TO OPERATE 50mW MAX IN PRIMARY AND REFLECT A PRIMARY SOURCE IMPEDANCE OF APPROXIMATELY 600Ω CT WITH 8Ω LOAD ON SECONDARY.

- A. Electrical Specifications (@ 20°C)
 - 1. Pri Source Impedance; 600Ω CT
 - 2. Sec Load Impedance; 8Ω
 - 3. Pri DC Current; 4.5 mA MAX
 - 4. Operating Level; 50 mW MAX @ 300 Hz
 - 5. Frequency Response (relative to 1 KHz); ±2.0 dB, @ 300 Hz to 100 KHz
 - 6. Longitudinal Balance; 60 dB MIN @ 1 KHz
 - 7. DC Resistance;
 - (1-3) 60Ω ±20%
 - $4-5) 1.5\Omega \pm 20\%$
 - 8. Turns Ratio; (1-3) : (4-5) = 8.66 : 1 $\pm 2\%$
 - 9. Dielectric Strength; 1000 Vrms, 60Hz 0.5 minute @ Pri - Sec

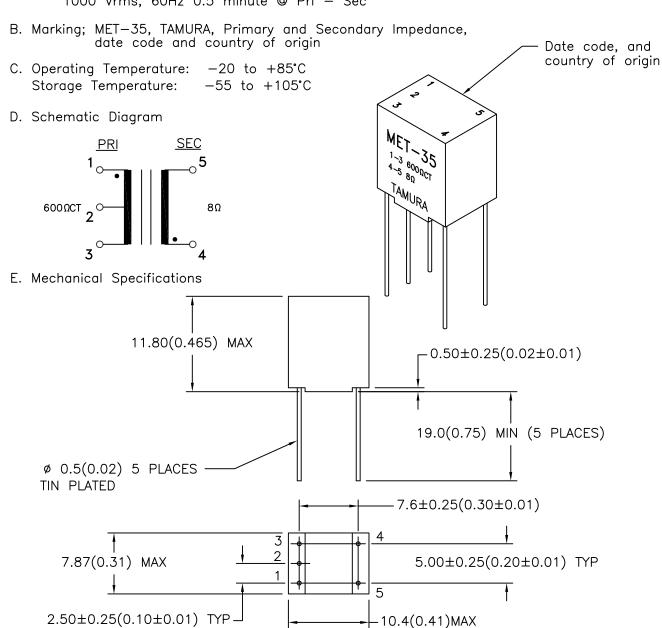

TOLERANCES (mm) 4 ± 0.2 $4 \le 20 \pm 0.3$ $20 \le 50 \pm 0.4$

PREPARED BY:

C. POPPE

••	•	•	•	
ENGINEER:				
			_	
MAY.	1 -	41	ט	

P-A1-10335D MAIHI P. SAFETY ENGINEER

DRAWING CONTROL NO.

REV

MODEL DESCRIPTION AUDIO COUPLING

MINIATURE ENCAPSULATED XFMR CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT 1040 SOUTH ANDREASEN DRIVE, #100 ESCONDIDO, CA. 92029 PRIOR NOTICE 1040 SOUTH ANDREASEN DRIVE, #100 ESCONDIDO, CA. 92029 (951) 699-1270 FAX 7607400536 MODEL SPECIFICATION MET-35

DIM: mm[In] SCL: 2/1

APPROVED:

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING. M. PITCHAI

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Tamura: