


**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0457190007](#)  
**Status:** **Active**  
**Overview:** Edge Card Connectors  
**Description:** 12.90mm Pitch EXTreme PowerEdge Connector, 2 Segments, 2.92mm Tail Length, Through Hole, Mates to 1.57mm Thick Card Edge or Bus Bar Tab

**Documents:**

<a href="#">3D Model (PDF)</a>	<a href="#">Packaging Specification PK-45714-001-001 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Test Summary TS-45844-001-001 (PDF)</a>
<a href="#">3D Model</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>
<a href="#">Product Specification PS-45719-001-001 (PDF)</a>	

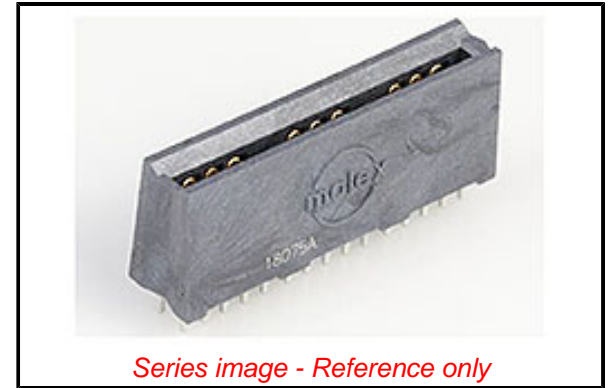

**Agency Certification**

CSA	LR19980
TUV	R72090228

**General**

Product Family	Edge Card Connectors
Series	<a href="#">45719</a>
Component Type	Edgecard to PCB
Data Rate	Unrated
Edge Card Thickness	1.57mm
High Power Bay (30.0A or more)	Yes
Orientation	Vertical
Overview	<a href="#">Edge Card Connectors</a>
Product Name	Bus Bar Socket, EXTreme PowerEdge
Standard Based	General
UPC	822348678594

**Physical**

(p)ower-(s)ignal Configuration	4p - 0s
Circuit Size Range	1-64 Circuits
Circuits (Loaded)	4
Circuits (maximum)	4
Color - Resin	Black
Durability (mating cycles max)	50
Entry Angle	Vertical (Top Entry)
Flammability	94V-0
Keying to Mating Part	N/A
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	5.200/g
PC Tail Length	2.92mm
PCB Thickness - Recommended	1.57mm
Packaging Type	Tray
Pitch - Mating Interface	12.90mm
Plating min - Mating	0.762µm
Plating min - Termination	3.810µm
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole

**Electrical**

Current - Maximum per Contact	40.0A
Voltage - Maximum	250V

**Solder Process Data**

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2020)9139-DC (19  
Jan 2021)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[45719 Series](#)

**Mates With**

1.57mm Double Sided Card Edge or Bus Bar Tab

Duration at Max. Process Temperature (seconds)	005
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	250

**Material Info**

**Reference - Drawing Numbers**

Packaging Specification	PK-45714-001-001
Product Specification	PS-45719-001-001
Sales Drawing	SD-45719-001-001
Test Summary	TS-45844-001-001

This document was generated on 06/28/2021

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[45719-0007](#)