

Customer Part:

Description

- Surface mount temperature compensated voltage controlled oscillator (TCVCXO) providing a high degree of frequency stability over a wide temperature range in a hermetically sealed ceramic package
- Model CFPT-125
- Model Issue number 10

Frequency Parameters

- Frequency 32.7680MHz
- Frequency Stability $\pm 0.90\text{ppm}$
- Operating Temperature Range -20.00 to 70.00°C
- Ageing $\pm 1\text{ppm}$ typical in 1st year @ 25°C

Electrical Parameters

- Supply Voltage $3.3\text{V} \pm 5\%$
- Current Draw 3.000mA
- Supply current typical at 20MHz
- Supply Voltage Variation
 $<30\text{MHz} \pm 0.3\text{ppm}$
 $30\text{MHz to } <40\text{MHz} \pm 0.4\text{ppm}$
 $40\text{MHz} \pm 0.5\text{ppm}$
- Load Variation: $\pm 0.2\text{ppm}$ (@ $15\text{pF} \pm 10\%$)
 After Reflow: $\pm 1.0\text{ppm}$

Frequency Adjustment

- Pulling $\pm 5\text{ppm min}$
- Control Voltage $1.65\text{V} \pm 1.0\text{V}$

Output Details

- Output Compatibility HCMOS
- Drive Capability 15pF (nominal)
- Rise and Fall Time 8.0ns max
- Duty Cycle $45/55\%$

Environmental Parameters



- Shock: IEC 60068-2-27, Test Ea: 980m/s^2 acceleration for 6ms, 3 shocks in each of 3 mutually perpendicular planes
- Vibration: IEC 60068-2-6, Test Fc, Procedure B4: $10\text{Hz}-60\text{Hz}$ 1.5mm displacement, $60-2000\text{Hz}$ at 98.1m/s^2 , 30mins in 3 mutually perpendicular planes at 1 oct/min
- Solderability: MIL-STD-202, Method 208, Category 3
- Storage Temperature Range: -55 to 125°C

Manufacturing Details

- Soldering: Suitable for Convection Reflow soldering. Peak temperature 260°C for 10sec max
- Washing: Able to withstand aqueous washing
- RoHS Terminations NiCoAu
- RoHS Reflow Temp 260degC 30s

Compliance

- RoHS Status (2015/863/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): 1

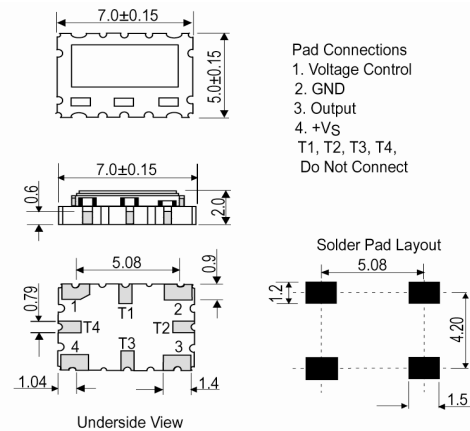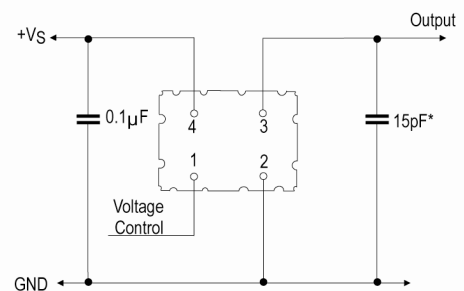
Outline (mm)

Test Circuit


* Inclusive of probe and jig capacitance

Sales Office Contact Details:

UK: +44 (0)1460 270200
 Germany: 0800 1808 443

France: 0800 901 383
 USA: +1.760.318.2824


Email: info@iqdfrequencyproducts.com
 Web: www.iqdfrequencyproducts.com

Customer Part:


Packaging Details

- Pack Style: Bulk Loose in bulk pack
Pack Size: 100
- *Alternative packing option available*

Test Circuit

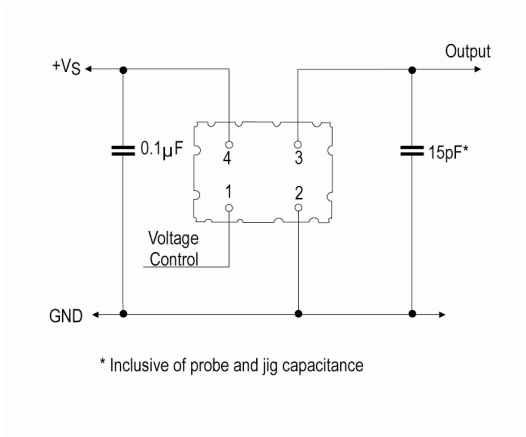

Wave Form

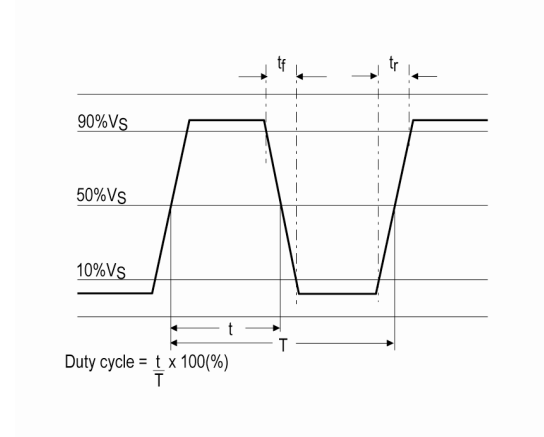

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[IQD Frequency Products:](#)

[LFTVXO009909Bulk](#)