

ALUMINUM ELECTROLYTIC CAPACITORS

ULH

Chip Type, High Voltage.
High Reliability.




- Chip type, High voltage and High Reliability.
- Load life of 4000 hours at +125°C.
- Applicable to automatic mounting machine using carrier tape.
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).
- AEC-Q200 compliant. Please contact us for details.



Specifications

Item	Performance Characteristics					
Category Temperature Range	-40 to +125°C					
Rated Voltage Range	160 to 450V					
Rated Capacitance Range	2.2 to 27μF					
Capacitance Tolerance	±20% at 120Hz, 20°C					
Leakage Current	After 1 minute's application of rated voltage at 20°C, leakage current is not more than 0.04CV+100 (μA).					
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C					
	Rated voltage (V)	160	200	250	400	450
Stability at Low Temperature	Measurement frequency : 120Hz					
	Impedance ratio ZT / Z20 (MAX.)	Z-40°C / Z+20°C	6	6	10	10
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 4000 hours at 125°C.		Capacitance change		Within ±30% of the initial capacitance value	
			tan δ		300% or less than the initial specified value	
Shelf Life	After storing the capacitors under no load at 125°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.		Leakage current		Less than or equal to the initial specified value	
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the characteristic requirements listed at right when they are removed from the plate.		Capacitance change		Within ±10% of the initial capacitance value	
			tan δ		Less than or equal to the initial specified value	
Marking	Black print on the case top.		Leakage current		Less than or equal to the initial specified value	


Chip Type

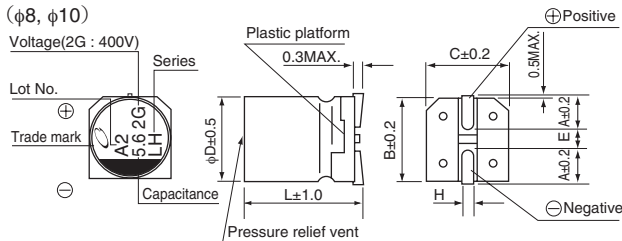

φD×L (mm)	8×10	10×10	10×13.5
A	2.9	3.2	3.2
B	8.3	10.3	10.3
C	8.3	10.3	10.3
E	3.1	4.5	4.5
L	10	10	13.5
H	0.8 to 1.1	0.8 to 1.1	0.8 to 1.1

Voltage	V	160	200	250	400	450
Code	2C	2D	2E	2G	2W	

Type numbering system (Example : 400V 5.6μF)

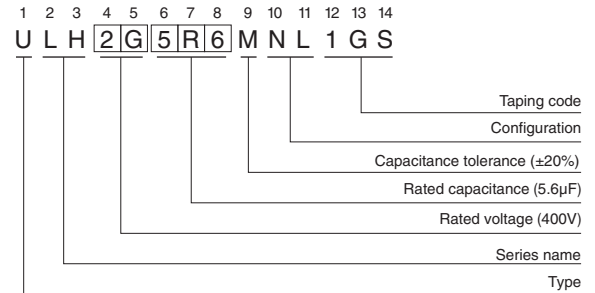

Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

● Dimension table in next page.

ULH

■ Dimensions

Rated Voltage (V) (code)	Rated Capacitance (μ F)	Case Size ϕ D \times L (mm)	tan δ	Leakage Current (μ A) (at 20°C after 1 minute)	Rated Ripple (mArms) (125°C/120Hz)	Part Number
160 (2C)	12	8 \times 10	0.20	176.8	45	ULH2C120MNL1GS
	18	10 \times 10	0.20	215.2	60	ULH2C180MNL1GS
	27	10 \times 13.5	0.20	272.8	65	ULH2C270MNL1GS
200 (2D)	10	8 \times 10	0.20	180	45	ULH2D100MNL1GS
	15	10 \times 10	0.20	220	60	ULH2D150MNL1GS
	22	10 \times 13.5	0.20	276	65	ULH2D220MNL1GS
250 (2E)	7.5	8 \times 10	0.25	175	30	ULH2E7R5MNL1GS
	12	10 \times 10	0.25	220	45	ULH2E120MNL1GS
	15	10 \times 13.5	0.25	250	50	ULH2E150MNL1GS
400 (2G)	3.3	8 \times 10	0.25	152.8	30	ULH2G3R3MNL1GS
	5.6	10 \times 10	0.25	189.6	45	ULH2G5R6MNL1GS
	7.5	10 \times 13.5	0.25	220	50	ULH2G7R5MNL1GS
450 (2W)	2.2	8 \times 10	0.30	139.6	20	ULH2W2R2MNL1GS
	3.9	10 \times 10	0.30	170.2	35	ULH2W3R9MNL1GS
	5.6	10 \times 13.5	0.30	200.8	40	ULH2W5R6MNL1GS

- Taping specifications are given in page 20.
- Recommended land size, soldering by reflow are given in page 16, 17.
- Please refer to page 3 for the minimum order quantity.