

**Customer Part:**
**Description**

- Ceramic package with a hermetically seam sealed metal lid suitable for automotive applications. Qualified to AEC-Q200 and with IATF-16949:2016 release. Not suitable for safety critical applications.
- 4 pad
- Model 12SMX AUTO-B
- Model Issue number 3

**Frequency Parameters**

- Frequency 6.0MHz
- Frequency Tolerance  $\pm 50.00\text{ppm}$
- Tolerance Condition @ 25°C
- Frequency Stability  $\pm 100.00\text{ppm}$
- Operating Temperature Range -40.00 to 125.00°C
- Overtone Order Fundamental
- Ageing  $\pm 5\text{ppm max per year @ 25°C}$

**Electrical Parameters**

- Load Capacitance (CL) 18.00pF
- Shunt Capacitance (C0) 7pF max
- Drive Level 50µW typical
- ESR 150.00Ω max

**Environmental Parameters**

- Storage Temperature Range: -45°C to Max Operating Temperature+5°C
- Qualified to AEC-Q200

**Manufacturing Details**

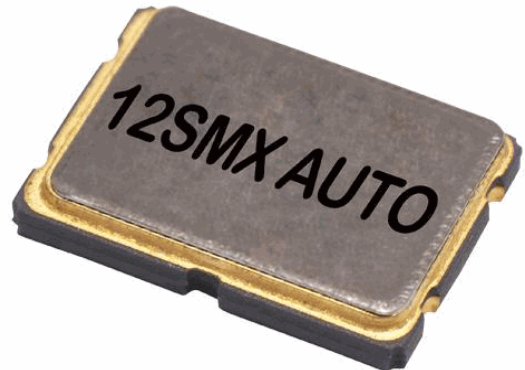
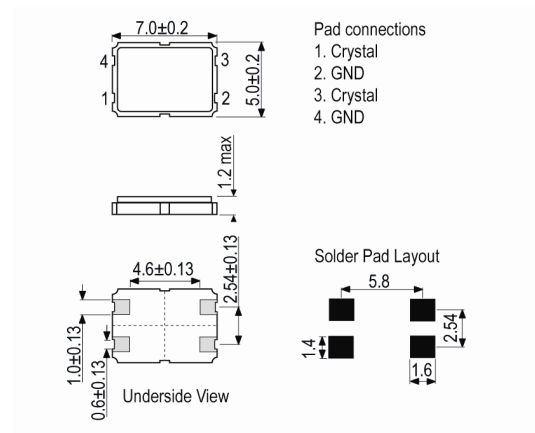
- Maximum Process Temperature: 260°C (10secs max)
- RoHS Terminations NiAu
- RoHS Reflow Temp 260°C max for 10secs max

**Compliance**

- RoHS Status (2015/863/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

**Packaging Details**

- Pack Style: **Cutt** On tape cut from a reel
- Pack Size: 100
- *Alternative packing option available*


**Outline (mm)**

**Sales Office Contact Details:**

UK: +44 (0)1460 270200

USA: +1.760.318.2824

 Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)

 Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[IQD Frequency Products:](#)

[LFXTAL072351Cutt](#)