
## UNCONTROLLED DOCUMENT



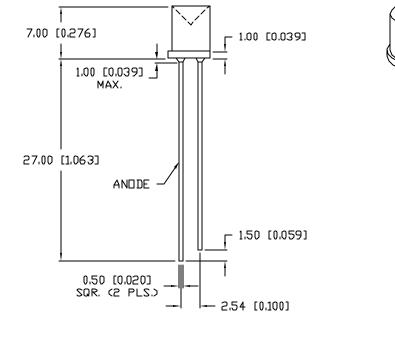

	PART NUMBER		REV.
	SSL-LX507DT3GT		В
REV.	E.C.N. NUMBER AND REVISION COMMENTS	D٨	ATE
Α	E.C.N. #10BRDR, & REDRAWN IN 3D.	5.3	i0.01
В	E.C.N. #11148	11.0	1.06

Electro-optical Ch	IARACTER	ISTICS TA=25°C		l <sub>f</sub> =20mA	
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		565		nm	
FORWARD VOLTAGE		2.2	2.6	Vf	
Reverse voltage	5.0			Vr	I <sub>r</sub> =100µА
AXIAL INTENSITY		30		mcd	l f = 20mA
VIEWING ANGLE		140		2x theta	
EMITTED COLOR:	GREEN				
EPOXY LENS FINISH:	GREEN	TRANSPARENT			

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	25	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	- 1.2	m₩/℃
OPERATING, STORAGE TEMP.	- 40 TO + 85	°C
SOLDERING TEMP.	+ 260	•C
2.0mm FROM BODY		3 SEC. MAX

Θ

SCALE:

N/A

UNCONTROLLED DOCUMENT \*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MN= +0.00 -0.00 CONFIDENTIAL INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX NC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION 290 E. HELEN ROAD PART NUMBER В PALATINE, IL 60067-6976 tra SSL-LX507DT3GT PHONE: +1.847.359.2790 We name Changes to Mank Ser Ven US WEB: www.lumex.com CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES. TW WEB: www.lumex.com.tw T-5mm (T-1 3/4) 565nm GREEN, DIMPLE TOP LED, RELIABILITY NOTE DRAWN BY: CHECKED BY: APPROVED BY: DATE: 11.01.06 OUR NANY YEARS OF EXPERIENCE DATA ACCUNULATION INDICATE THAT PAGE: 1 OF 1 SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.

JC

PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

GREEN TRANPARENT LENS.

REV.

В

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex: SSL-LX507DT3GT