


G3VM-35□G□/351VY/401G□/401VY

MOS FET Relays SOP 4-pin, General-purpose Type

General-purpose MOS FET Relays in SOP 4-pin packages for a wide range of applications

- Contact form: 1a (SPST-NO) or 1b (SPST-NC)
- Load voltage: 350 V or 400 V

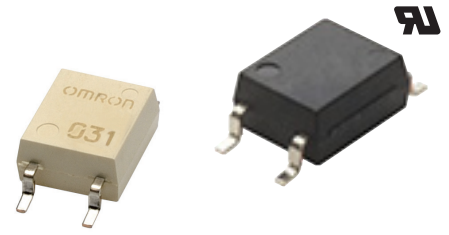

RoHS Compliant

Note: The actual product is marked differently from the image shown here.

Application Examples



- Semiconductor test equipment
- Test & Measurement equipment
- Communication equipment
- Various battery-driven devices
- Security equipment
- Industrial equipment
- Power circuit
- Amusement equipment

Package

(Unit : mm, Average)

SOP 4-pin

Special SOP 4-pin



Note: The actual product is marked differently from the image shown here.

Model Number Legend

G3VM-□□□□□
1 2 3 4 5

- 1. Load Voltage**
35 : 350 V
40 : 400 V
- 2. Contact form**
1 : 1a (SPST-NO)
3 : 1b (SPST-NC)

- 4. Additional functions**
None: Dielectric strength between I/O 1500 V
Y: Dielectric strength between I/O 3750 V

- 3. Package**
G : SOP 4-pin
V : Special SOP 4-pin

- 5. Other informations**
When specifications overlap, serial code is added in the recorded order.

Ordering Information

| Package | Contact form | Terminals | Load voltage (peak value) * | Continuous load current (peak value) * | Stick packaging | | Tape packaging | |
|-------------------|--------------|----------------------------|-----------------------------|--|-----------------|--------------------------|------------------|--------------------------|
| | | | | | Model | Minimum package quantity | Model | Minimum package quantity |
| SOP4 | 1a (SPST-NO) | Surface-mounting Terminals | 350 V | 100 mA | G3VM-351G1 | 100 pcs. | G3VM-351G1(TR) | 2,500 pcs. |
| Special SOP 4-PIN | | | | 110 mA | G3VM-351VY | 125 pcs. | G3VM-351VY(TR05) | 500 pcs. |
| | 120 mA | | | G3VM-353G | 3,000 pcs. | G3VM-353G(TR) | | |
| SOP4 | 1b (SPST-NC) | | 400 V | 100 mA | G3VM-401G1 | 100 pcs. | G3VM-401G1(TR) | 2,500 pcs. |
| Special SOP 4-PIN | 1a (SPST-NO) | | | 120 mA | G3VM-401G | | G3VM-401G(TR) | |
| | | | | 110mA | G3VM-401VY | 125 pcs. | G3VM-401VY(TR05) | |

* The AC peak and DC value are given for the load voltage and continuous load current.

Note: To order tape packaging for Relays with surface-mounting terminals, add "(TR)", "(TR05)" to the end of the model number.

SOP

G3VM-35□G□/351VY/401G□/401VY

Absolute Maximum Ratings (Ta = 25°C)


| Item | | Symbol | G3VM-351G1 | G3VM-351VY | G3VM-353G | G3VM-401G1 | G3VM-401G | G3VM-401VY | Unit | Measurement conditions | | |
|-------------------------------|--------------------------------------|-----------------------|------------------|-------------|------------|------------|-----------|-------------|-------|-------------------------------|--------------|--|
| Input | LED forward current | IF | 50 | 30 | 50 | 30 | 50 | 30 | mA | | | |
| | LED forward current reduction rate | $\Delta I_F/^\circ C$ | -0.5 | -0.3 | -0.5 | -0.3 | -0.5 | -0.3 | mA/°C | Ta ≥ 25°C | | |
| | LED reverse voltage | VR | 5 | 6 | 5 | | | 6 | V | | | |
| Connection temperature | | TJ | 125 | | | | | | | °C | | |
| Output | Load voltage (AC peak/DC) | V _{OFF} | 350 | | | 400 | | | | V | | |
| | Continuous load current (AC peak/DC) | Io | 100 | 110 | 120 | 100 | 120 | 110 | mA | | | |
| | ON current reduction rate | $\Delta I_o/^\circ C$ | -1.0 | -1.1 | -1.2 | -1.0 | -1.2 | -1.1 | mA/°C | Ta ≥ 25°C | | |
| | Pulse ON current | I _{op} | 300 | 330 | 360 | 300 | 360 | 330 | mA | t=100 ms, Duty=1/10 | | |
| | Connection temperature | | TJ | 125 | | | | | | | °C | |
| | Dielectric strength between I/O * | | V _{I-O} | 1500 | 3750 | 1500 | | | 3750 | V _{rms} | AC for 1 min | |
| Ambient operating temperature | | Ta | -40 to +85 | -40 to +110 | -40 to +85 | | | -40 to +110 | °C | With no icing or condensation | | |
| Ambient storage temperature | | T _{stg} | -55 to +125 | | | | | | °C | | | |
| Soldering temperature | | - | 260 | | | | | | °C | 10 s | | |

* The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Electrical Characteristics (Ta = 25°C)

| Item | | Symbol | G3VM-351G1 | G3VM-351VY | G3VM-353G | G3VM-401G1 | G3VM-401G | G3VM-401VY | Unit | Measurement conditions | |
|---|---------------------------------------|----------------|-----------------|------------|-----------|------------|-----------|------------|------|--|-----------------------|
| Input | LED forward voltage | V _F | Minimum | 1.0 | 1.1 | 1.0 | 1.1 | 1.0 | 1.1 | V | I _F =10 mA |
| | | | Typical | 1.15 | 1.27 | 1.15 | 1.27 | 1.15 | 1.27 | | |
| | | | Maximum | 1.3 | 1.4 | 1.3 | 1.4 | 1.3 | 1.4 | | |
| Reverse current | I _R | Maximum | 10 | | | | | | μA | VR=5 V | |
| Capacitance between terminals | C _T | Typical | 30 | | | | | | pF | V=0, f=1 MHz | |
| Trigger LED forward current | I _{FT} (I _{FC}) *2 | Typical | 0.4 | 0.8 | 1 | - | 1 | 0.8 | mA | G3VM-351G1/401G1 : I _o =100 mA G3VM-351VY/401VY : I _o =110 mA G3VM-353G : I _{OFF} =10 μA G3VM-401G : I _o =120 mA | |
| | | Maximum | 1 | 3 | | 0.2 | 3 | | | | |
| Release LED forward current | I _{FC} (I _{FT}) *2 | Minimum | 0.1 | | | - | 0.1 | | mA | G3VM-351G1/351VY/401G1/401G/401VY : I _{OFF} =100 μA G3VM-353G : I _o =120 mA | |
| | | Typical | - | 0.4 | - | 0.001 | - | 0.5 | | | |
| Maximum resistance with output ON | R _{ON} | Typical | 35 (25) | 35 (22) | 15 | 18 | 17 | 40 (30) | Ω | G3VM-351G1 : I _F =2 mA, I _o =100 mA Values in parentheses are for t < 1 s. G3VM-351VY/401VY : I _F =5 mA, I _o =110 mA Values in parentheses are for t < 1 s. G3VM-353G : I _o =120 mA G3VM-401G1 : I _F =0.5 mA, I _o =100 mA, t < 1 s G3VM-401G : I _F =5 mA, I _o =120 mA | |
| | | Maximum | 50 (35) | | 25 | 35 | | 65 (45) | | | |
| Current leakage when the relay is open | I _{LEAK} | Typical | 1 | 1 | - | 1 | - | 1 | nA | G3VM-351G1/351VY : V _{OFF} =350 V G3VM-353G : V _{OFF} =350 V, I _F =5 mA G3VM-401G1/401G/401VY : V _{OFF} =400 V | |
| | | Maximum | 1,000 | | | | | | | | |
| Capacitance between terminals | C _{OFF} | Typical | 35 | 30 | 65 | 70 | | 30 | pF | G3VM-351G1/351VY/401G1/401G/401VY : V=0, f=1 MHz G3VM-353G : V=0, f=1 MHz, I _F =5 mA | |
| Capacitance between I/O terminals | C _{I-O} | Typical | 0.8 | | | | | | pF | f=1 MHz, V _s =0 V | |
| Insulation resistance between I/O terminals | R _{I-O} | Minimum | 1000 | | | | | | MΩ | V _{I-O} =500 VDC, R _{oH} ≤60% | |
| | | Typical | 10 ⁸ | | | | | | | | |
| Turn-ON time | t _{ON} | Typical | 1 | 0.5 | - | 2 | 0.3 | 0.5 | ms | G3VM-351G1 : I _F =2 mA, R _L =200 Ω, V _{DD} =20 V G3VM-401G1 : I _F =0.5 mA, R _L =200 Ω, V _{DD} =20 V Others : I _F =5 mA, R _L =200 Ω, V _{DD} =20 V *1 | |
| | | Maximum | 5 | 1 | | 10 | 1 | | | | |
| Turn-OFF time | t _{OFF} | Typical | 1 | 0.1 | - | 1 | 0.1 | | ms | G3VM-351G1 : I _F =2 mA, R _L =200 Ω, V _{DD} =20 V G3VM-401G1 : I _F =0.5 mA, R _L =200 Ω, V _{DD} =20 V Others : I _F =5 mA, R _L =200 Ω, V _{DD} =20 V *1 | |
| | | Maximum | 3 | 0.5 | 3 | 5 | 1 | 0.5 | | | |

*1. Turn-ON and Turn-OFF Times

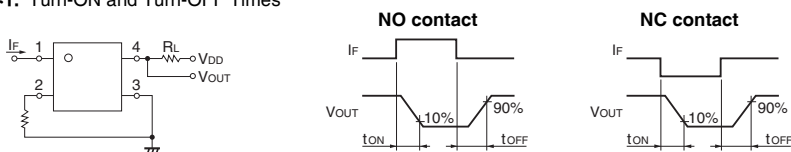

*2. These values are for Relays with NC contacts

Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.

| Item | Symbol | | G3VM-351G1 | G3VM-351VY | G3VM-353G | G3VM-401G1 | G3VM-401G | G3VM-401VY | Unit |
|--------------------------------------|-----------------|---------|------------|------------|-----------|------------|-----------|------------|------|
| Load voltage (AC peak/DC) | V _{DD} | Maximum | 280 | | | 320 | | | V |
| Operating LED forward current | I _F | Minimum | – | 5 | | – | 5 | | mA |
| | | Typical | 2 | 7.5 | – | 0.5 | 7.5 | | |
| | | Maximum | 25 | | | | | | |
| Continuous load current (AC peak/DC) | I _O | Maximum | 80 | 110 | 120 | 80 | 120 | 110 | |
| Ambient operating temperature | T _a | Minimum | -20 | | | | | | °C |
| | | Maximum | 65 | 100 | 65 | | | 100 | |

Spacing and Insulation


| Item | G3VM-35□G□/401G□ | G3VM-351VY/401VY | Unit |
|------------------------------|------------------|------------------|------|
| | Minimum | | |
| Creepage distances | 4.0 | 5.0 | mm |
| Clearance distances | 4.0 | 5.0 | |
| Internal isolation thickness | 0.1 | 0.2 | |

SOP


G3VM-35□G□/351VY/401G□/401VY

Engineering Data


LED forward current vs. Ambient temperature

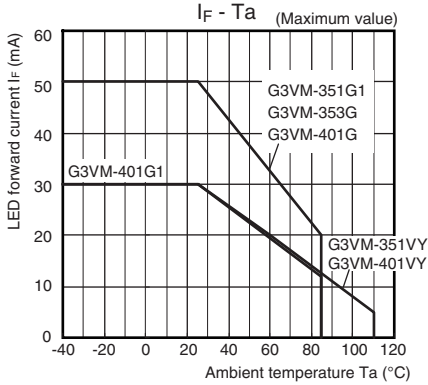


Continuous load current vs. Ambient temperature

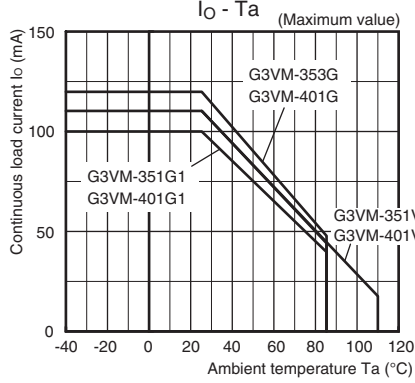


LED forward current vs. LED forward voltage

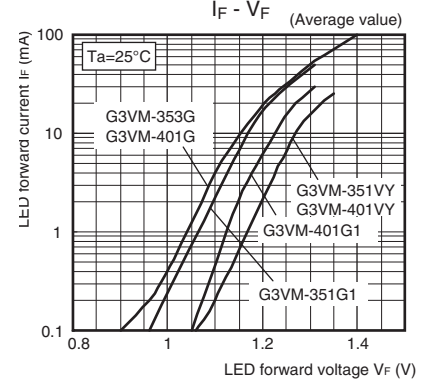


Continuous load current vs. On-state voltage G3VM-351G1/353G

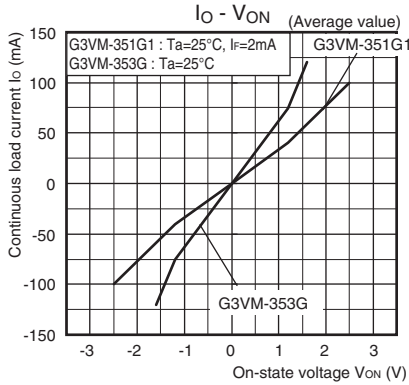


G3VM-351VY/401G/401G1/401VY

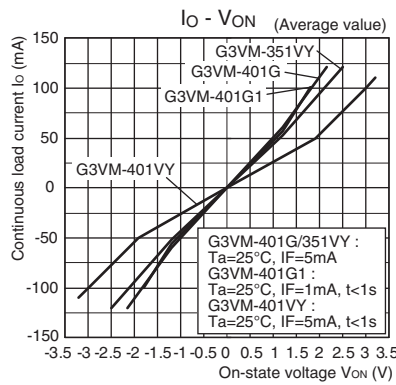


On-state resistance vs. Ambient temperature G3VM-351G1/353G

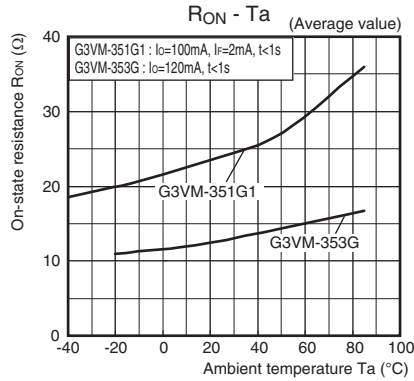


G3VM-351VY/401G/401G1/401VY

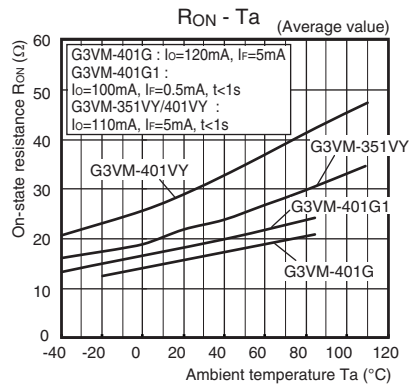


Trigger LED forward current vs. Ambient temperature

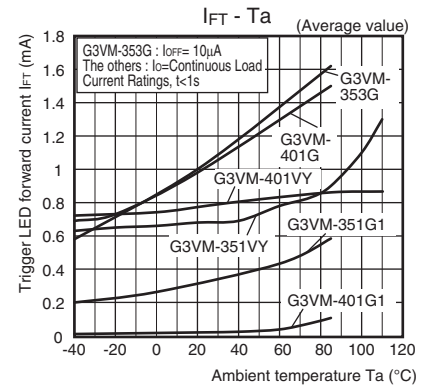

Turn ON, Turn OFF time vs. LED forward current G3VM-351G1/353G

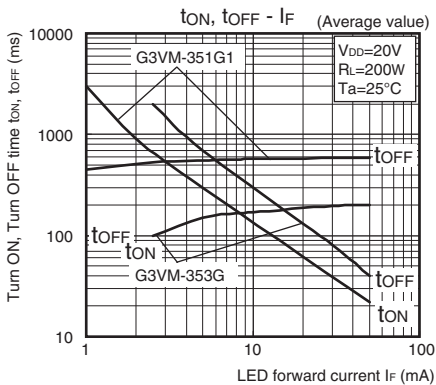


G3VM-351VY/401G/401G1/401VY

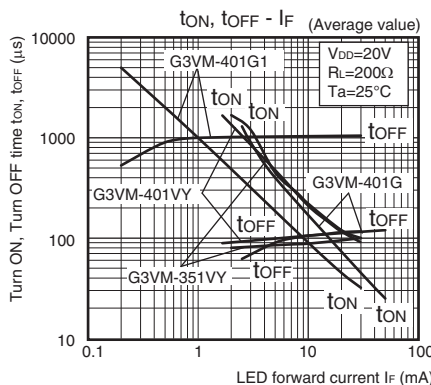


Engineering Data


● Turn ON, Turn OFF time vs. Ambient temperature G3VM-351G1/353G

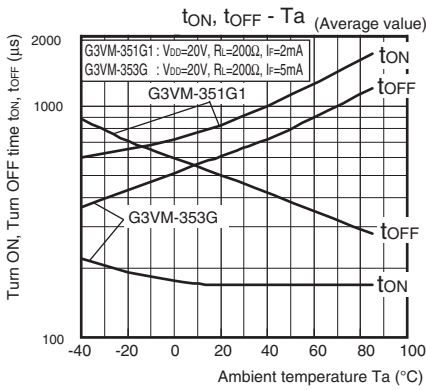


G3VM-351VY/401G/401G1/401VY

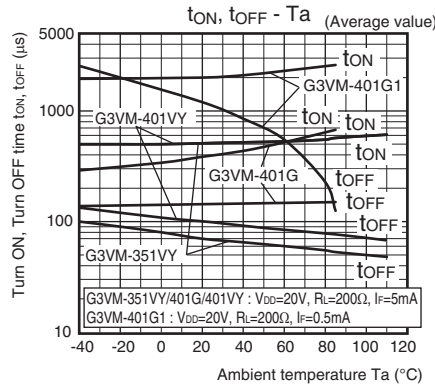


● Current leakage vs. Ambient temperature G3VM-351G1/353G/351VY/401G/401G1

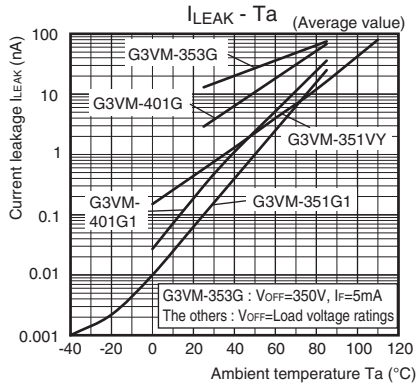

G3VM-401VY

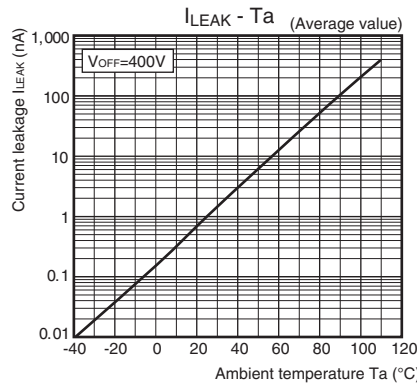

● Current leakage vs. Load voltage

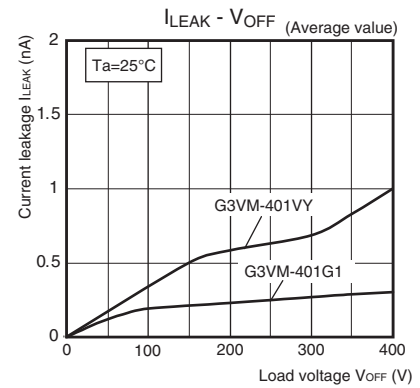

SOP


G3VM-35□G□/351VY/401G□/401VY

■Appearance / Terminal Arrangement / Internal Connections


●Appearance

SOP (Small Outline Package)

SOP 4-pin

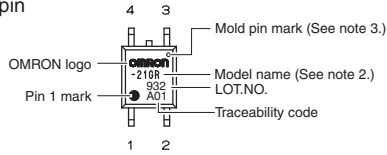


Special SOP 4-pin (G3VM-351VY/401VY)




- Note 1:** The actual product is marked differently from the image shown here.
- Note 2:** "G3VM" does not appear in the model number on the Relay.
- Note 3:** The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.

●Terminal Arrangement/Internal Connections (Top View)

G3VM-351G1/VY
G3VM-401G1/G/VY



G3VM-353G



■Dimensions (Unit: mm)


SOP (Small Outline Package)

SOP 4-pin




Surface-mounting Terminals

Weight: 0.1 g




Actual Mounting Pad Dimensions

(Recommended Value, Top View)




Note: The actual product is marked differently from the image shown here.

Special SOP 4-pin * (G3VM-351VY/401VY)




Surface-mounting Terminals

Weight: 0.1 g



Actual Mounting Pad Dimensions

(Recommended Value, Top View)



* The external dimensions are different from those of the standard SOP 4-pin, but the mounting pad dimensions are the same.
Note: The actual product is marked differently from the image shown here.

■Approved Standards

UL recognized

| Model | Approved Standards | Contact form | File No. |
|---|--------------------|--------------|----------|
| G3VM-351G1 G3VM-401G G3VM-351VY G3VM-401VY | UL (recognized) | 1a (SPST-NO) | E80555 |
| G3VM-353G | | 1b (SPST-NC) | |

Models Certified by SEMKO for EN/IEC Standards

| Model | Approved Standards | Contact form | File No. |
|-----------|--------------------------------|--------------|--------------|
| G3VM-401G | EN62368-1 (SEMKO certified) | 1a (SPST-NO) | SE-S-2001018 |

■ Safety Precautions

- Refer to the *Common Precautions for All MOS FET Relays* for precautions that apply to all MOS FET Relays.

SOP

G3VM-35□G□/351VY/401G□/401VY

Please check each region's Terms & Conditions by region website.

OMRON Corporation

Electronic and Mechanical Components Company

Regional Contact

Americas

<https://www.components.omron.com/>

Asia-Pacific

<https://ecb.omron.com.sg/>

Korea

<https://www.omron-ecb.co.kr/>

Europe

<http://components.omron.eu/>

China

<https://www.ecb.omron.com.cn/>

Japan

<https://www.omron.co.jp/ecb/>