Nov.1.2017 Copyright 2017 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	1	DIS-C-000585	T.K	E.K	07.07.27
					. .
					. .
					. .

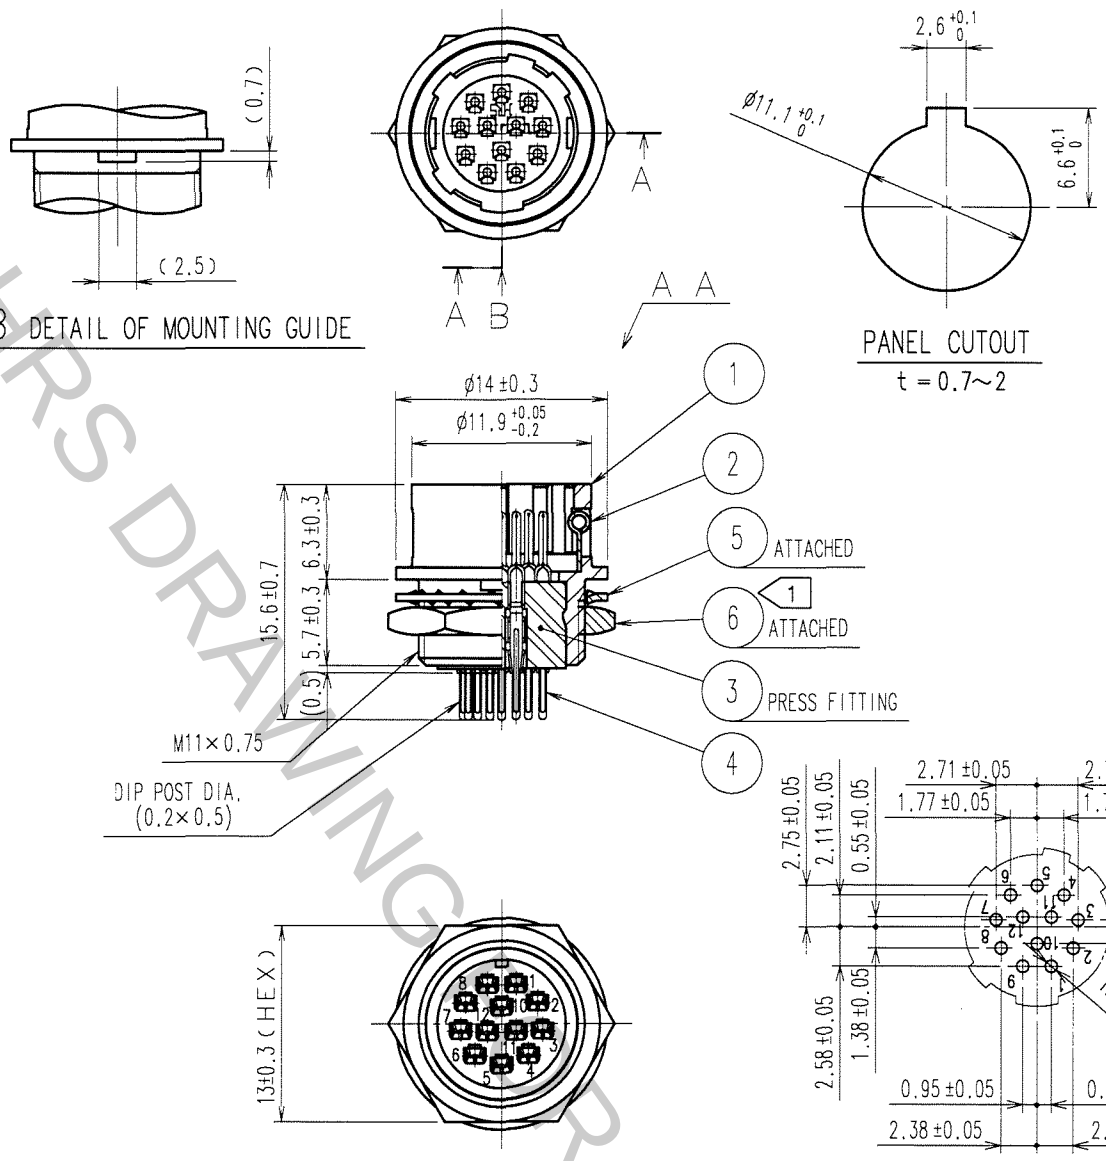

NOTE 1 THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑥ TO BE 2 N·m. LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF. NO. ⑥ FROM LOOSENING.

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
3	PBT	(BLACK) UL94V-0	6	BRASS 1	NICKEL PLATING
2	STAINLESS STEEL		5	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	4	PHOSPHOR BRONZE	SILVER PLATING 2μm min.

CODE NO.(OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL	H.KISHI '05 08 31	H.KISHI '05 08 31	E.KUNII '05 09 02	M.SATO '05 09 02	

TO
R

SCALE 2 : 1
UNITS mm

DRAWING NO. EDC4-022534-71

PART NO. HR10A-10R-12PB(71)

HIROSE ELECTRIC CO.,LTD.

CODE NO. CL110-0416-4-71

1/1

FORM NO.228

HRS DRAWING FOR REFERENCE