

PART NUMBER	OED-CL-1L1	REV.	E
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
05.29.95	E.C.N. #10BRDR. & REDRAWN.		Α
04.26.96	E.C.N. #10157.		В
01.05.98	E.C.N. #10BRDR.		С
11.14.02	E.C.N. #10BRDR. & REDRAWN.		D
02.14.12	E.C.N. #11806/10BRDR. & REDRAWN.		E



∕_ø5.00 [ø0.197]


PARAMETER	MIN	TYP	MAX	UNITS	TEST CON
PEAK WAVELENGTH		880		nm	
SPECTRAL BANDWIDTH		80		nm	
FORWARD VOLTAGE		1.9		Vf	lf=50mA
REVERSE VOLTAGE	5.0			Vr	k=100 ا
RADIANT INTENSITY		30		mW/SR	lf=50mA
HALF ANGLE		±10		degrees	
LENS FINISH:	WATER CLEAR				

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	1	A
STEADY CURRENT	100	mA
POWER DISSIPATION	190	mW
DERATE FROM 25°C	-1.2	mW/*C
OPERATING TEMP.	-25 TO +85	•C
STORAGE TEMP.	-40 TO +85	•C
SOLDERING TEMP.	+260	•C
2.0mm FROM BODY	3	SEC.

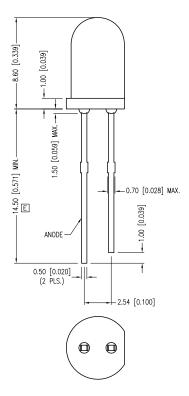

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= $\frac{+0.00}{-0.00}$ MAX.= $\frac{+0.00}{-0.00}$ MAX

425 N. GARY AVE.	T-5mm x 8.6 HIGH PERFORMANCE INFARED EMITTING DIODE, WATER CLEAR LENS.	DATE: 02.14.12	DRAWN BY: AB
425 N. GAYY AVE. CAROL STREAM, IL 60188-4900 PHONE: +1.800.278.5666	**THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.** CONFIDENTIAL INFORMATION	PAGE: 1 OF 1	CHKD BY:
FAX: +1.630.315.2152 WEB: WWW.LUMEX.COM		SCALE: NTS	APRVD BY:
Creating LED and LCD Solutions Together	The information contained in this document is the property of lumex inc. Except as specifically authorized in writing by lumex inc., the holder of this document shall keep all information contained herein confidential and shall protect same in whole or in part from disclosure and dissemination to all third parties.	UNIT: mm [INCH]	®



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex: OED-CL-1L1