

- Fully encapsulated low profile plastic casing in PCB version
- 2 x MOPP Medical safety according to AAMI/ANSI ES 60601-1:2005(R) and IEC/EN 60601-1 3rd edition
- IT and industrial safety according to IEC/EN/UL 60950-1
- Ready to meet ErP directive <0.3 W no load power consumption
- -40°C start-up temperature
- Safety class II prepared
- Protection against over-temperature, overload and short circuit
- 3-year product warranty



The TMM 40 Series of fully encapsulated 40 Watt AC/DC power supply modules feature a reinforced/double I/O isolation system according to latest medical safety standards 60601-3 3rd edition for 2 x MOPP (Means Of Patient Protection).

The high efficiency and the use of highest grade components make the units suitable for an operating temperature range of -40°C to +60°C while it goes up to 75°C with 50% load derating. EMI/EMC characteristics and the safety approval package qualify these modules not only for medical devices but also for demanding applications in transportation systems and for equipment in industrial an commercial environment.

Models

Order Code	Output Power	Output 1		Output 2		Efficiency
		Vnom	I _{max}	Vnom	I _{max}	
TMM 40105	40 W	5 VDC	8'000 mA			81 %
TMM 40112		12 VDC	3'330 mA			84 %
TMM 40115		15 VDC	2'660 mA			85 %
TMM 40124		24 VDC	1'660 mA			84 %
TMM 40212		+12 VDC	1'660 mA	-12 VDC	1'660 mA	84 %
TMM 40215		+15 VDC	1'330 mA	-15 VDC	1'330 mA	85 %

Input Specifications

Input Voltage	- AC Range	85 - 264 VAC
	- DC Range	120 - 370 VDC (Designed for, no certification)
Input Frequency		47 - 440 Hz
Input Current	- Full Load & Vin = 230 VAC	5 VDC model: 430 mA max.
		12 VDC model: 415 mA max.
		15 VDC model: 410 mA max.
		24 VDC model: 415 mA max.
		12 / -12 VDC model: 415 mA max.
	- Full Load & Vin = 115 VAC	15 / -15 VDC model: 410 mA max.
		5 VDC model: 720 mA max.
		12 VDC model: 690 mA max.
		15 VDC model: 680 mA max.
		24 VDC model: 690 mA max.
12 / -12 VDC model: 690 mA max.		
15 / -15 VDC model: 680 mA max.		
Power Consumption	- At no load	300 mW max. (Ready to meet ErP directive)
Input Inrush Current	- at 230 VAC	60 A max.
	- at 115 VAC	30 A max.
Recommended Input Fuse		3000 mA (slow blow)
Input Protection		T 2 A / 250 VAC (Internal Fuse in L & N)

Output Specifications

Voltage Set Accuracy		±2% max.
Regulation	- Input Variation (Vmin - Vmax)	single output models: 0.5% max.
	- Load Variation (0 - 100%)	single output models: 1% max.
		dual output models: 2% max. (Output 1) 2% max. (Output 2)
Ripple and Noise (20 MHz Bandwidth)	- single output	5 VDC model: 90 mVp-p max.
		12 VDC model: 155 mVp-p max.
		15 VDC model: 195 mVp-p max.
		24 VDC model: 310 mVp-p max.
	- dual output	12 / -12 VDC model: 155 / 155 mVp-p max.
		15 / -15 VDC model: 195 / 195 mVp-p max.
	- single output	5 VDC model: 80 mVp-p typ.
		12 VDC model: 120 mVp-p typ.
		15 VDC model: 150 mVp-p typ.
		24 VDC model: 240 mVp-p typ.
- dual output	12 / -12 VDC model: 120 / 120 mVp-p typ.	
	15 / -15 VDC model: 150 / 150 mVp-p typ.	
Capacitive Load	- single output	5 VDC model: 8'000 µF max.
		12 VDC model: 3'900 µF max.
		15 VDC model: 3'900 µF max.
		24 VDC model: 680 µF max.
	- dual output	12 / -12 VDC model: 1'500 / 1'500 µF max.
	15 / -15 VDC model: 1'000 / 1'000 µF max.	
Minimum Load		Not required
Temperature Coefficient		±0.02 %/K max.
Hold-up Time	- at 230 VAC	50 ms min.
	- at 115 VAC	10 ms min.
Start-up Overshoot Voltage		5% max.
Short Circuit Protection		Continuous, Automatic recovery
Output Current Limitation		105% min. of Iout max.
Overvoltage Protection		120% typ. of Vout nom. (By Zener diode)

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

Safety Specifications

Safety Standards	- IT / Multimedia Equipment	IEC 60950-1 EN 60950-1 UL 60950-1
	- Medical Equipment	EN 60601-1 IEC 60601-1 ANSI/AAMI ES 60601-1 CSA-C22.2, No 60601-1 2 x MOPP (Means Of Patient Protection) www.tracopower.com/overview/tmm40
	- Certification Documents	
Protection Class		Class II (Prepared): Reinforced Insulation
Pollution Degree		PD 2
Over Voltage Category		OVC II

EMC Specifications

EMI Emissions		EN 61000-6-3 (Generic Residential) EN 61000-6-4 (Generic Industrial)
	- Conducted Emissions	EN 55011 class B (internal filter) EN 55032 class B (internal filter) FCC Part 15, class B
	- Radiated Emissions	EN 55011 class B (internal filter) EN 55032 class B (internal filter) FCC Part 15, class B
EMS Immunity		EN 55024 (IT Equipment) EN 61000-6-1 (Generic Residential) EN 61000-6-2 (Generic Industrial) EN 60601-1-2 edition 4 (Medical Devices)
	- Electrostatic Discharge	Air: EN 61000-4-2, ± 15 kV, perf. criteria A Contact: EN 61000-4-2, ± 8 kV, perf. criteria A
	- RF Electromagnetic Field	EN 61000-4-3, 10 V/m, perf. criteria A
	- EFT (Burst) / Surge	EN 61000-4-4, ± 2 kV, perf. criteria A L to L: EN 61000-4-5, ± 1 kV, perf. criteria A
	- Conducted RF Disturbances	EN 61000-4-6, 10 Vrms, perf. criteria A
	- PF Magnetic Field	Continuous: EN 61000-4-8, 30 A/m, perf. criteria A
	- Voltage Dips & Interruptions	230 VAC / 50 Hz: 30%, 25 periods, perf. criteria A >95%, 0.5 periods, perf. criteria A >95%, 1 period, perf. criteria A >95%, 250 periods, perf. criteria B

General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature	-40°C to +80°C
	- Storage Temperature	-40°C to +95°C
Power Derating	- High Temperature	3.75 %/K above 60°C
Over Temperature	- Protection Mode	142°C typ. (Automatic recovery at 67°C)
Protection Switch Off	- Measurement Point	Internal IC temperature
Cooling System		Natural convection (20 LFM)
Altitude During Operation		5'000 m max.
Switching Frequency		130 kHz typ. (PWM)
Insulation System		Reinforced Insulation
Working Voltage (rated)		240 VAC
Isolation Test Voltage	- Input to Output, 60 s	4'000 VAC
Isolation Resistance	- Input to Output, 500 VDC	1'000 MOhm min.
Leakage Current	- Touch Current	100 μ A max.
Reliability	- Calculated MTBF	200'000 h (MIL-HDBK-217F, ground benign)
Housing Material		Plastic resin (UL 94 V-0 rated)

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.



Pin Material	Copper alloy w. gold plate over nickel subplate
Soldering Profile	Wave Soldering (1.5mm from casing) 260°C / 10 s
Connection Type	THD (Through-Hole Device)
Weight	310 g
Environmental Compliance	- Reach - RoHS
	www.tracopower.com/info/reach-declaration.pdf www.tracopower.com/info/rohs-declaration.pdf

Supporting Documents

Overview Link (for additional Documents)

www.tracopower.com/overview/tmm40

Outline Dimensions

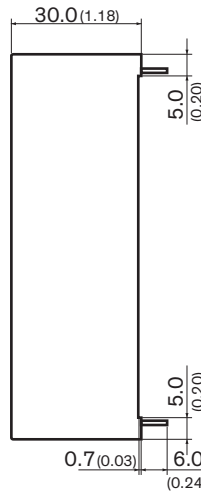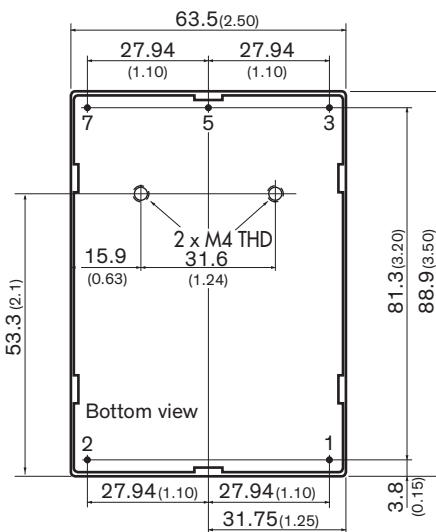

Dimensions in mm (inch)
Tolerances ± 0.5 (± 0.02)
Pin \varnothing 1.0 ± 0.1 (0.04 ± 0.004)
Pin pitch tolerances ± 0.25 (± 0.01)

Pinout

Pin	Single Output	Dual Output
1	AC (N)	AC (N)
2	AC (L)	AC (L)
3	+Vout	+Vout
5	-Vout	Common
7	NC	-Vout

NC: Not connected