
NOTES:	115101-22-XX.XX	
1. PACKAGE CABLE ASSEMBLIES IN BAG. LABEL BAG WITH AMPHENOL 115101-22-XX.XX AND DATE CODE.	DRAWING NO.	REV DESC
2. CABLE ASSEMBLY TO BE 100% TESTED FOR HI-POT, CONTINUITY, SHORTS AND OPEN.	THIRD ANGLE PROJ. 🕀 🚭	A RELEASE
	LENCTH VV VV (SEE TADLE)	
	LENGTH XX.XX (SEE TABLE)	
C - 0.75" MAX [19.05 MM] TYP(2)	LENGTH TABLE PART NUMBER LENGTH (IN.) 115101-22-06.00 06.00 ±0.25 115101-22-12.00 12.00 ±0.25 115101-22-18.00 18.00 ±0.25 115101-22-24.00 24.00 ±0.50 115101-22-36.00 36.00 ±0.50 115101-22-48.00 48.00 ±0.50 * ADDITIONAL LENGTHS CAN BE PROVIDED BY CHANGING XX.XX TO DESIRED LENGTH IN INCHES CONTACT CONNEX MARKETING FOR QUOTE	
DESIGN REQUIREMENTS:		
FREQUENCY TO GHz X CONTINUITY		
VSW R : 1 MAX X HI-POT : 500 VRMS		009-954-352 A/R
INS. LOSS dB MAX OTHER		009-881-299 A/R 112533 2 PART NUMBER QTY
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES ±.015 (0,381 mm) ±.005 (0,127 mm) ± 1°	DRAWN DATE KARTHIK R 16-Apr	
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are	ENGINEER DATE KARTHIK R 16-Apr	-13 BNC CRIMP PLUG, USING LMR 240 C
confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is	APPROVED DATE	VARIOUS LENGTHS
not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any	CAD FILE	
product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.		

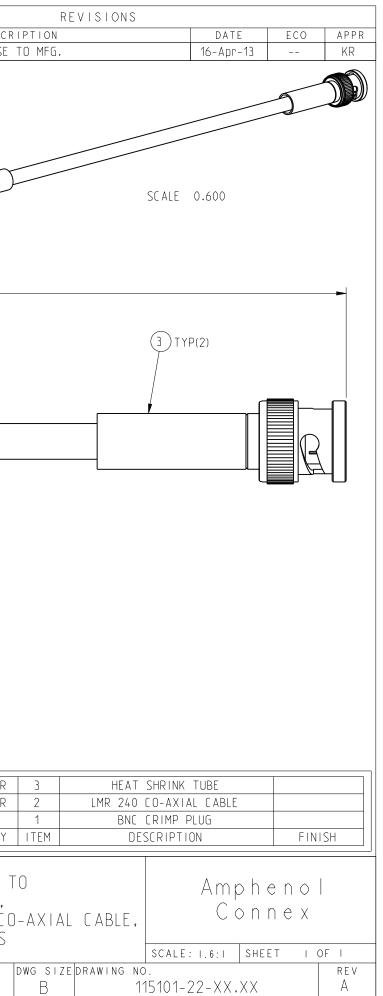

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

115101-22-36.00 115101-22-12.00 115101-22-24.00 115101-22-48.00 115101-22-06.00