

## UNCONTROLLED DOCUMENT

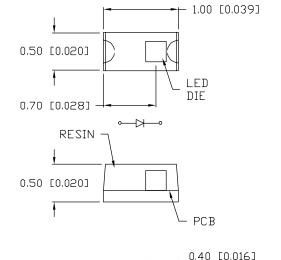


(2 PLS.)


POLARITY MARK

- 0.20 [0.008]






TOTAL TIME ABOVE 220°C IS 60 SECONDS MAX.

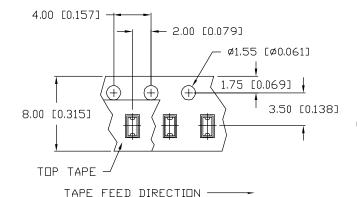

0.30 [0.012]

SOLDERING

**TERMINAL** 



### PART NUMBER

SMI-IX0402DRC-TR

E.C.N. NUMBER AND REVISION COMMENTS REV DATE E.C.N. #11148. 12.03.04 E.C.N. #11508. 03.05.09

ELECTRO-OPTICAL CHARACTERISTICS TA=25°C I f= 20mA					
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		650		nm	
FORWARD VOLTAGE		2.0	2.4	Vf	
REVERSE VOLTAGE	5.0			$V_r$	1 <sub>r</sub> =100,uA
AXIAL INTENSITY		25		mcd	$I_f = 20 \text{mA}$
VIEWING ANGLE		120		2x theta	
EMITTED COLOR:	RED				
EPOXY LENS FINISH:	WATER (	CLEAR			

#### LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	170	mW
DERATE FROM 25°C	-1.2	mW/°C
OPERATING TEMP.	-30  TO  +85	°C
STORAGE TEMP.	-40 TO +85	•C

\* t<10µS

Α В

#### NOTES:

- 1. PARTS PACKAGED IN CONDUCTIVE COVER AND CARRIER TAPE.
- 2. THE CATHODE IS ORIENTED TOWARDS THE TAPE SPROCKET HOLE



CAUTION: MOISTURE SENSITIVE DEVICE PER JEDEC LEVEL 3 STANDARDS

\*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX.= +0.00 (±0.000), X.XX=±0.127 (±0.000). LEAD SIZE=±0.05 (0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX.= +0.00 (±0.000), X.XX=±0.127 (±0.000). LEAD SIZE=±0.05 (0.002), LEAD LENGTH=±0.75 (±0.000). MIN= +DECIMAL PRECISION MAX.= +0.00 (±0.000). MIN= +DECIMAL PRECI

REV. B

PART NUMBER SML-LX0402DRC-TR

1.0mm x 0.5mm SURFACE MOUNT LED. 650nm RED LED. WATER CLEAR LENS. TAPE AND REEL.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E, HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790

US WEB: www.lumex.com TW WEB: www.lumex.com.tw

APPROVED BY: DATE: DRAWN BY: CHECKED BY: 7.17.03 PAGE: 1 OF 1 SCALE: N/A BC

REV.

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SML-LX0402DRC-TR