

6.0 x Ø2.0 mm

LOW FREQUENCY, REFLOWABLE, CYLINDRICAL TYPE CRYSTALS TUNING FORK SURFACE MOUNT AB26TR Series

FEATURES:

- Excellent shock resistance.
- Frequency from 30kHz to 165kHz.
- Formed leads for low cost SMD type.
- Reflow capable.

APPLICATIONS:

- Real-time clock.
- Blue-tooth and wireless applications.
- Measuring instruments.
- Clock source for communication.

STANDARD SPECIFICATIONS

Frequency Range	32.768kHz	30kHz to 165kHz
Operating Temperature	-40°C to +85°C	
Storage Temperature	-40°C to +85°C	
Turnover Temperature	25°C to ±5°C	
Frequency Tolerance @ 25C	±20ppm max.	±30ppm max.
Frequency Stability over Temp	-0.034 ±0.006ppm / (25-T) ² (See Note)	
Equivalent Series Resistance (ESR)	35kΩ max.	35kΩ to 50kΩ max.
Shunt Capacitance C ₀	1.35pF typical	0.8pF to 1.7pF
Load Capacitance C _L	12.5pF (See Options)	
Motion Capacitance C ₁	0.003pF typ.	0.001pF-0.004pF
Capacitance ratio	450 typ.	425 to 800 typ.
Drive Level	1μW max.	
Aging @ 25°C per year	±5ppm max.	
Insulation Resistance:	500MΩ min. at 100Vdc ±15Vdc	

NOTE: Example; Stability at -20°C is: $-0.034 \times (25 - [-20])^2 = -68.8\text{ppm}$.


Environmental, and mechanical specifications, see appendix C.

Tape and Reel, (2,000pcs/reel), appendix H.

Marking, see appendix G.


Application notes, see appendix A.

Recommended handling, see appendix F.

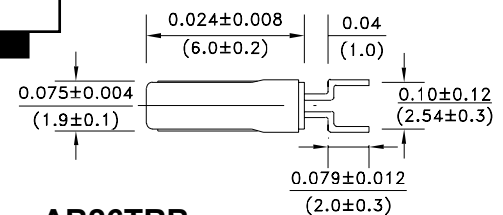

AB26TRB

Recommended Land Pattern

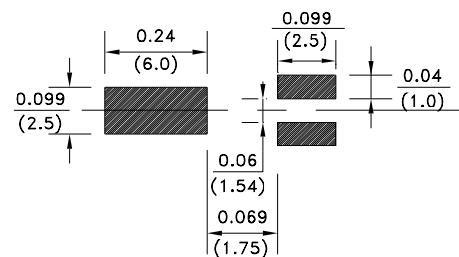

Dimensions: Inches (mm)

ORDERING OPTIONS

AB26TRX - Frequency - CL - Tolerance - Packaging

B

Load cap in pF

- T (Tape & Reel)

XX.XXXX kHz

- 1 for ±10ppm max.
- 7 for ±15ppm max.

NOTE: Left blank if standard • All specifications and markings subject to change without notice

29 Journey • Aliso Viejo, CA 92656 • USA

(949) 448-7070 • FAX: (949) 448-8484

E-MAIL: abinfo@abracon.com • INTERNET ADDRESS: www.abracon.com

ABRACON IS
ISO 9001 / QS 9000
CERTIFIED

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ABRACON:](#)

[AB26TRB-32.768KHZ-T](#)