SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

UL RECOGNIZED: UL 1283 CSA CERTIFIED: CSA C22.2 No. 8 VDE APPROVED: EN 60939-2

OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 20 AMP, 120/250 VAC

LINE FREQUENCY:

50~60Hz

MAXIMUM LEAKAGE CURRENT, EACH LINE TO GROUND:

2µA @ 120V 60Hz

5µA @ 250V 50Hz

OPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATEO CURRENT, I_r. IN AN AMBIENT, T₀. HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT, I₀, IS AS FOLLOWS: $I_{-}=I_{-}=\sqrt{85-T_0}$

 $I_0 = I_r - \sqrt{\frac{85 - T_0}{45}}$

RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +85°C HUMIDITY: 21 DAYS @ 40°C 95% RH. CURRENT OVERLOAD TEST: 6 TIMES Ir FOR 8 SECONDS

CATALOG # 20EHZ1

ECN# APPRVD DATE
10-023669 PJO B

TEST SPECIFICATIONS:

INDUCTANCE: 4.55 mH NOMINAL

CAPACITANCE: (MEASURED @ 1KHz, 0.250VAC MAX., 25°C±1°C)

LINE TO LINE:

0.74 μF ±20%

DISCHARGE RESISTOR: 470K A

L/G AND L/L I.R. NO DISCHARGE RESISTOR:

6000M₁ (MIN.) @ 100VDC,


20°C AND 50% RH

RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 1500 VAC FOR I MINUTE LINE TO LINE: 1450 VDC FOR I MINUTE

FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

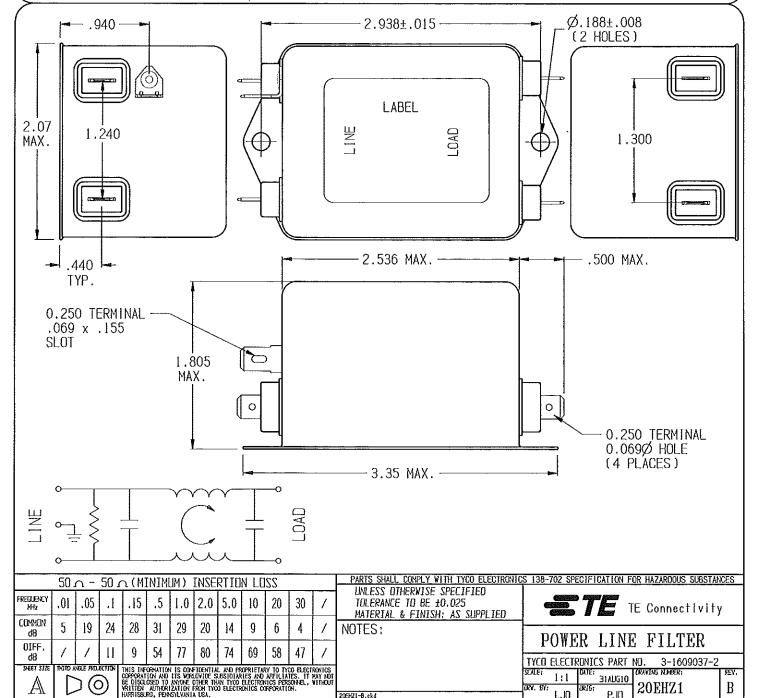

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>TE Connectivity</u>: 3-1609037-2