



# EC4AW SERIES


## 3.3-6 WATT 4:1 INPUT RANGE

### DC-DC CONVERTERS



## FEATURES

- \* 3.3-6W Isolated Output
- \* DIP-24/SMD Package
- \* Efficiency to 83%
- \* 4:1 Input Range
- \* Regulated Outputs
- \* Pi Input Filter
- \* Continuous Short Circuit Protection
- \* Without Tantalum Capacitor Inside

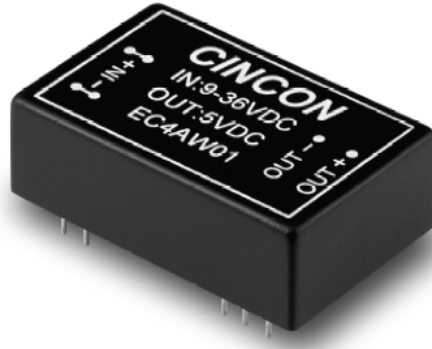

MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	INPUT CURRENT		% EFF.		CAPACITOR LOAD MAX.
				NO LOAD	FULL LOAD	(2)	(3)	
EC4AW01	9-36 VDC	5 VDC	1000 mA	5 mA	254 mA	84	82	1000uF
EC4AW02	9-36 VDC	12 VDC	470 mA	5 mA	283 mA	85	83	470uF
EC4AW03	9-36 VDC	15 VDC	400 mA	5 mA	301 mA	85	83	400uF
EC4AW04	9-36 VDC	±12 VDC	±230 mA	7.5 mA	280 mA	85	82	230uF
EC4AW05	9-36 VDC	±15 VDC	±190 mA	7.5 mA	293 mA	85	81	190uF
EC4AW06	9-36 VDC	±5 VDC	±500 mA	5 mA	251 mA	85	83	500uF
EC4AW07	9-36 VDC	3.3 VDC	1000 mA	5 mA	176 mA	80	78	1000uF
EC4AW11	18-72 VDC	5 VDC	1000 mA	5 mA	132 mA	83	79	1000uF
EC4AW12	18-72 VDC	12 VDC	470 mA	5 mA	143 mA	86	82	470uF
EC4AW13	18-72 VDC	15 VDC	400 mA	5 mA	154 mA	86	81	400uF
EC4AW14	18-72 VDC	±12 VDC	±230 mA	7.5 mA	143 mA	85	80	230uF
EC4AW15	18-72 VDC	±15 VDC	±190 mA	7.5 mA	148 mA	85	80	190uF
EC4AW16	18-72 VDC	±5 VDC	±500 mA	5 mA	130 mA	84	80	500uF
EC4AW17	18-72 VDC	3.3 VDC	1000 mA	5 mA	93 mA	79	74	1000uF

### NOTE:

1. Nominal Input Voltage: 24 or 48 VDC.
2. Measured at 12VDC for 24Vin, 24VDC for 48Vin.
3. Measured at Nominal Input Voltage.

