


# CR 2032



Type Number ..... 6032  
 Designation IEC ..... CR 2032  
 System ..... Li-Manganese dioxide/  
 Organic Electrolyte

UL Recognition ..... MH 13654 (N)  
 Nominal Voltage ..... 3 V  
 Typical Capacity C ..... 230 mAh (Load 5,6 kOhm,  
 at 20°C down to 2 V)

Weight (approx.) ..... 3 g  
 Volume ..... 0,95 ccm  
 Coding ..... Date of Manufacturing  
 Month/Year

Temperature Ranges min. max.  
 Storage ..... -55°C 70°C  
 Discharge ..... -20°C 70°C<sup>1</sup>


Dimensions min. max.  
 Diameter (A) ..... 19,70 20,00  
 Height (B) ..... 2,90 3,20  
 Shoulder Diameter [E] ..... 16,00

## Typical Capacities (at 20°C)


Discharge Type	Load	End Voltage: 2,0 V	
Continuous 24 h/d, 7 d/w Current [µA]	5600 Ω	Time:	460 h
		Capacity:	230 mAh
		Energy:	645 mWh

## Performance Data


### Temperature Characteristics

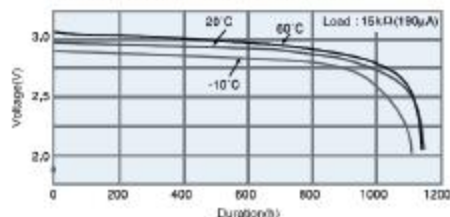

### Operating Voltage vs. load resistance\*

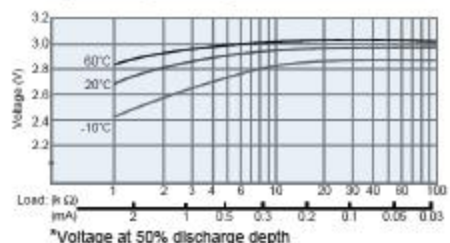

### Capacity vs. load resistance

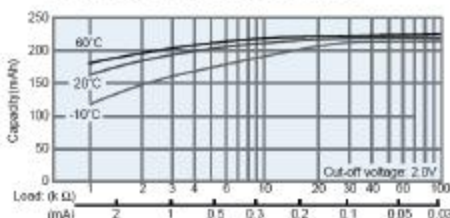

<sup>1</sup> Contact VARTA if the application is intended to be outside the range of -20°C to +70°C.

<sup>2</sup> depending on environmental condition and energy consumption

- Self-discharge rate < 1% at room temperature
- Storage life > 10 years
- Operating life<sup>2</sup> > 10 years