


CR 2450



Type Number 6450
 Designation IEC CR 2450
 System Li-Manganese dioxide/
 Organic Electrolyte

UL Recognition MH 13654 (N)
 Nominal Voltage 3 V
 Typical Capacity C 620 mAh (Load 5,6 kOhm
 at 20°C down to 2 V)

Weight (approx.) 6,2 g
 Volume 2,3 ccm
 Coding Date of Manufacturing
 Month/Year

Temperature Ranges min. max.
 Storage -55°C 70°C
 Discharge -20°C 70°C¹


Dimensions min. max.
 Diameter (A) 24,20 24,70
 Height (B) 4,60 5,00
 Shoulder Diameter [E] 21,00

Typical Capacities (at 20°C)


Discharge Type	Load	End Voltage: 2,0 V
Continuous 24 h/d, 7 d/w	5600 Ω	Time: 1250 h Capacity: 620 mAh Energy: 1730 mWh

Performance Data


Temperature Characteristics

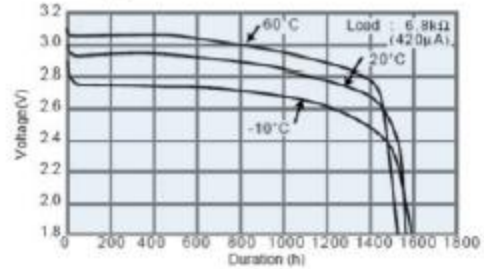

Operating Voltage vs. load resistance*

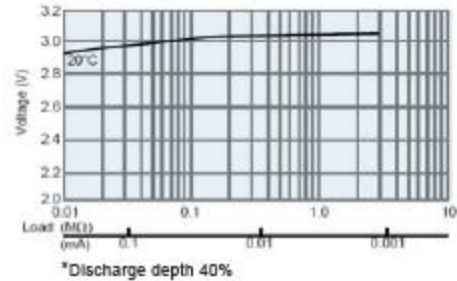

Capacity vs. load resistance

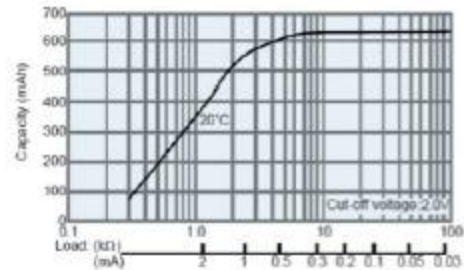

¹ Contact VARTA if the application is intended to be outside the range of -20°C to +70°C.

² depending on environmental condition and energy consumption

- Self-discharge rate < 1% at room temperature
- Storage life > 10 years
- Operating life² > 10 years