THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.-.
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
J	—

REVISIONS 変更

P	LTR	DESCRIPTION	DATE	DWN	APVD
	P4	ADDED 3-5175444-1 ECR-10-008921	26APR10	TS	KB

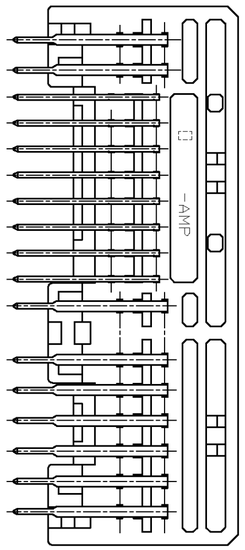

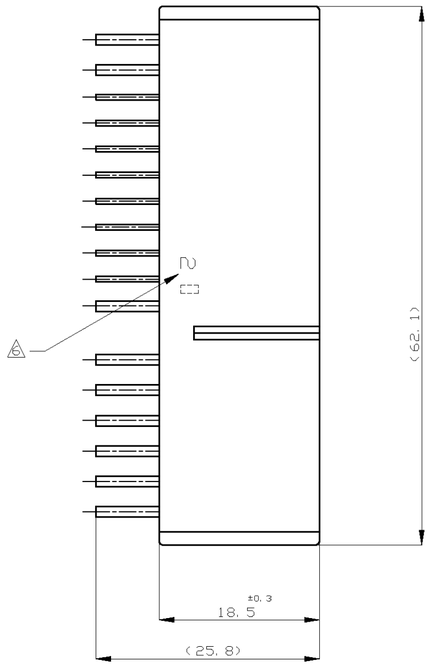

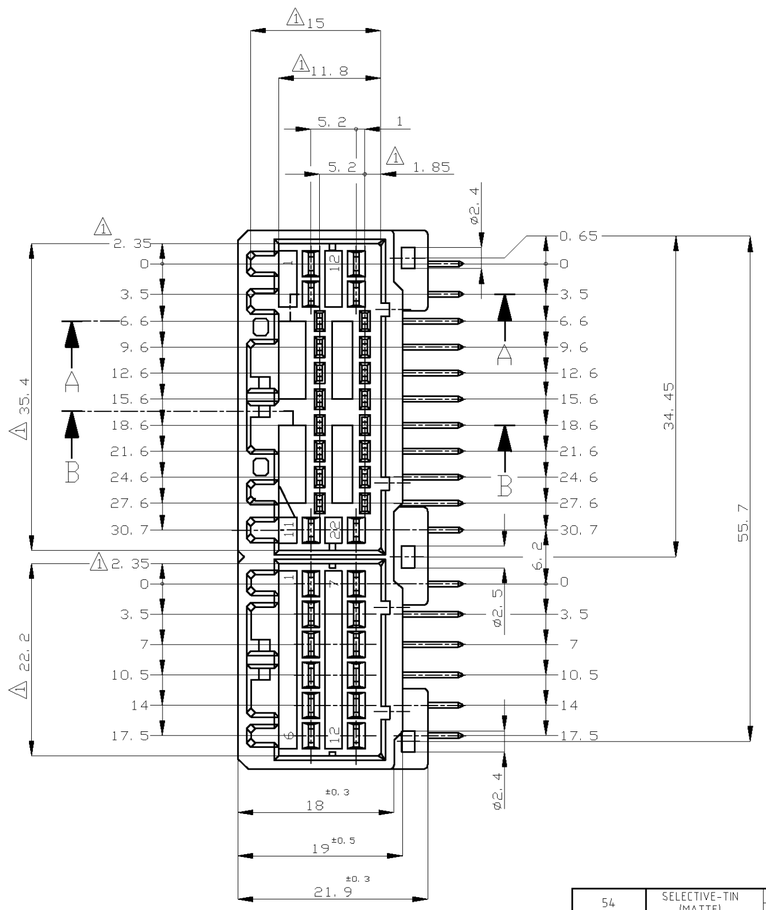

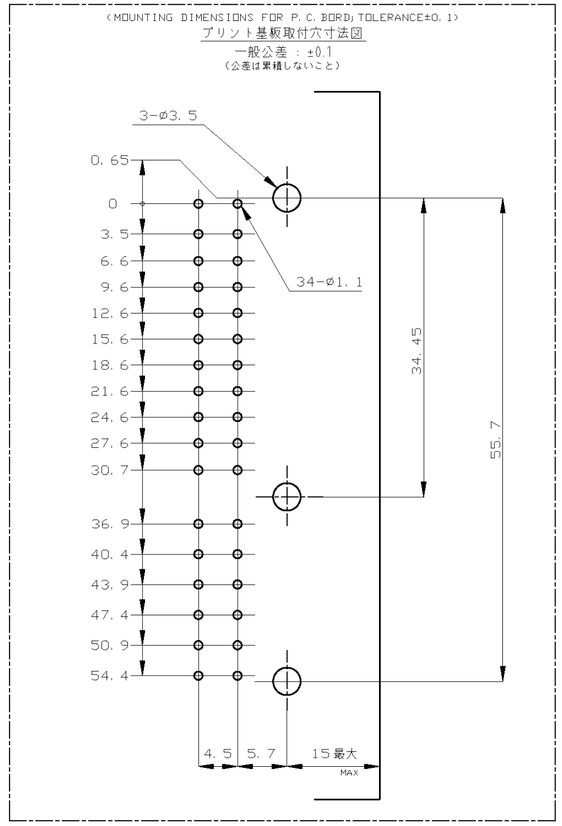

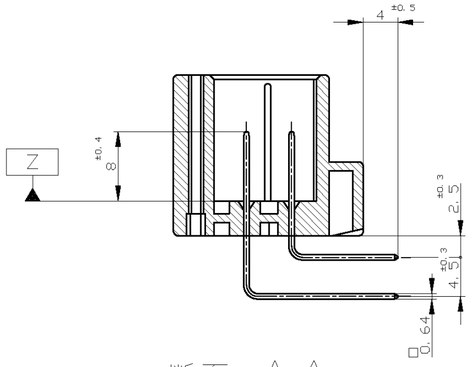

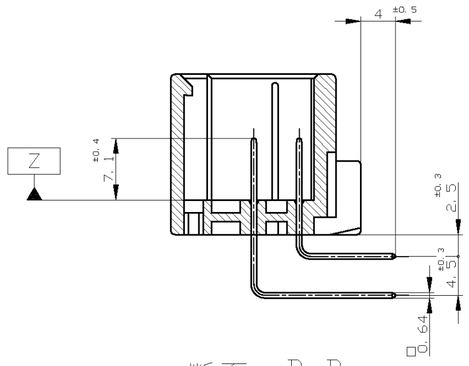

注 記

△1 -Z- 面から2mmの範囲で測定

2. 嵌合相手ハウジング型 174515, 175442

3. 推奨取付ねじ : JIS B1115, B1122 タッピンねじ, なべ2種
   呼び径3, 長さ6mm以下 (締付けトルク : 0.4N-m(4Kg-cm)以下)

4. 適用製品規格番号 : 108-5280

△5 回路番号
   パワー回路 ① ~ ⑱
   シグナル回路 ⑲ ~ ㉞

△6 適用製品型番のプリフィックス及びIDマークを
   カラーホットマークにて表示

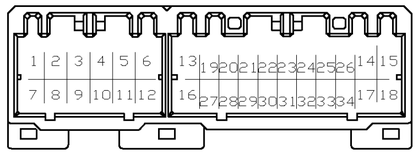

NOTES; △1 MUST BE KEPT BETWEEN -Z- AND 2
2 THE MATING PLUG HSG. PART NUMBER; 174515, 175442
3 RECOMMENDED MOUNTING SCREW; 3mmDIA, 6mmLENGTH(MAX.)
PAN HEAD, CLASS 2 TAPPING SCREW SPECIFIED IN JIS B1115, B1122
(TIGHTENING TORAUE; 0.4N-m(4Kg-cm)MAX.)
4 APPLICABLE PRODUCT. SPEC NO. 108-5280
△5 CIRCUIT NUMBER
POWER CIPCUIT NO. ① ~ ⑱
SIGNAL CIRCUIT NO. ⑲ ~ ㉞
△6 INDICATED PREFIX AND ID MARK OF PRODUCT P/N BY HOT MARK

54	SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 8	-	20, 24, 26~28, 32~34	GRAY	4-5175444-6
		SELECTIVE-TIN (BRIGHT) × 26	-	-		
53	SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 13	2~5	20~24, 29~32	WHITE	3-5175444-1
		SELECTIVE-TIN (BRIGHT) × 21	-	-		
	SEE CUSTOMER DRAWING 9-175444-1					9-175444-1
7	TIN-LEAD	SELECTIVE GOLD × 8	14, 17, 18	24~26, 32, 34	GRAY	7-175444-6
		PRE-TIN × 26	-	-		
6	TIN-LEAD	SELECTIVE GOLD × 8	-	19~22, 27~30	WHITE	6-175444-1
		PRE-TIN × 26	-	-		
5	TIN-LEAD	SELECTIVE GOLD × 8	4, 6, 9, 12	26, 28, 29, 34	LIGHT GRAY	5-175444-9
		PRE-TIN × 26	-	-		
5	TIN-LEAD	SELECTIVE GOLD × 4	5, 6, 11, 12	-	GRAY	5-175444-6
		PRE-TIN × 30	-	-		
5	TIN-LEAD	SELECTIVE GOLD × 8	4, 6, 9, 12	26, 28, 29, 34	BLACK	5-175444-2
		PRE-TIN × 26	-	-		
5	TIN-LEAD	SELECTIVE GOLD × 8	4, 6, 9, 12	26, 28, 29, 34	WHITE	5-175444-1
		PRE-TIN × 26	-	-		
4	TIN-LEAD	SELECTIVE GOLD × 8	-	20, 24, 26~28, 32~34	GRAY	4-175444-6
		PRE-TIN × 26	-	-		
3	TIN-LEAD	SELECTIVE GOLD × 13	2~5	20~24, 29~32	GRAY	3-175444-6
		PRE-TIN × 21	-	-		
3	TIN-LEAD	SELECTIVE GOLD × 13	2~5	20~24, 29~32	BLACK	3-175444-2
		PRE-TIN × 21	-	-		
3	TIN-LEAD	SELECTIVE GOLD × 13	2~5	20~24, 29~32	WHITE	3-175444-1
		PRE-TIN × 21	-	-		
2	TIN-LEAD	SELECTIVE GOLD × 16	-	19~34	WHITE	2-175444-1
		PRE-TIN × 18	-	-		
0		PRE-TIN × 34	-	-	ORANGE	175444-8
0		PRE-TIN × 34	-	-	GRAY	175444-6
0		PRE-TIN × 34	-	-	BLUE	175444-5
8	SELECTIVE-TIN (MATTE)	SELECTIVE-TIN (BRIGHT) × 34	-	-	WHITE	175444-3
0		PRE-TIN × 34	-	-	BLACK	175444-2
0		PRE-TIN × 34	-	-	WHITE	175444-1
△6 MARKING マーキング	SOLDERING SIDE 半田付け部	CONTACT SIDE 接触部側	POWER CIRCUIT NO. パワー回路	SIGNAL CIRCUIT NO. シグナル回路	COLOR 色	PART NUMBER 製品型番
	CONTACT FINISH コンタクト仕上		△5 GOLD PLATED CIRCUIT NO. 金めっき回路番号			

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位: 粍 mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差

0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± -
4 PLC	± -
ANGLES	± -

GENERAL TOLERANCE

0<✱<10	±0.2
10<✱<30	±0.25
30<✱<100	±0.3
ANGLES	±3°

MATERIAL 材料: HOUSING : PBT; CONTACT : BRASS

FINISH 仕上: SEE TABLE

DWN	M.KADOSAKI	12OCT05
CHK	T.SHINOHARA	12OCT05
APVD	K.BESTUI	12OCT05

PRODUCT SPEC 製品規格: -

APPLICATION SPEC 取付適用規格: -

WEIGHT: CUSTOMER DRAWING

Tyco Electronics Corporation
Kawasaki, Japan

NAME 名称: 34POSITION CAP HOUSING ASS'Y
040/070 SERIES HYBRID I/O CONNECTOR

SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
A2	00779	C-175444	—

SCALE 尺度 2:1 | SHEET 1 OF 1 | REV P4

175444