







(7.00)

(2.00) .079 **□** ↓

-TH (1.45) .057 →

USB-A, USBR-A, USB-AM SERIES

# **STANDARD & RUGGED USB 2.0**

### **SPECIFICATIONS**

For complete specifications and recommended PCB layouts see www.samtec.com?USB-A, www.samtec.com?USBR-A or www.samtec.com?USB-AM

#### Insulator Material:

High Temperature Thermoplastic Contact Material: Phosphor Bronze
Plating:
Gold on Contacts, Nickel on Shell, Tin on Tails
Operating Temp Range:
-50 °C to +85 °C
Voltage Rating:
30 VAC

Cycles: 1500 (max tested)

Packaging: Packaged and shipped in Bulk Packaging Trays; Trays suitable for automation available

**RoHS Compliant:** 

## Lead-Free Solderable:


-TH & -VU=Yes (Wave Solder only) TID Numbers (USB-A): USB-A-D-X-X-TH (61001199) USB-A-S-X-X-TH (61001180) USB-A-S-X-X-SM2 (61001152) TID Number (USB-AM): USB-AM-S-X-X-SM (61001154)

#### RECOGNITIONS

(12.00)

For complete scope of recognitions see www.samtec.com/quality



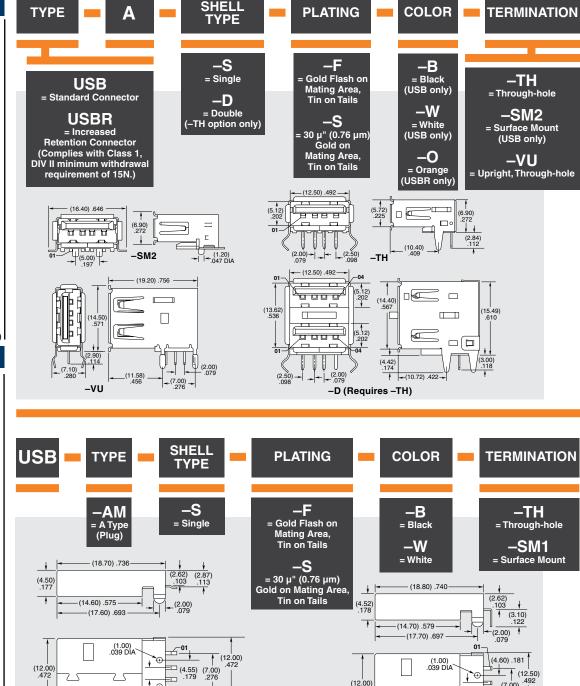

WWW.SAMTEC.COM

<del><--</del>(2.00) .079

↑ ⊕ (2.00) .079

-SM1

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

# Samtec:

 USB-A-S-S-B-TH-R
 USB-B-S-S-B-SM-TR
 USB-B-S-F-W-VT-R
 USB-B-S-S-W-TH-TR
 USB-A-S-S-W-VU-RC
 USB-B-S-S-W-VU-RC
 USB-B-S-F-W-VU-RC
 USB-B-S-F-W-VU-RC
 USB-B-S-F-W-VU-RC
 USB-B-S-F-W-VU-RC
 USB-B-S-F-W-VU-RC
 USB-B-S-F-W-VU-RC
 USB-B-S-F-W-VU-RC
 USB-B-S-F-W-VU-RC
 USB-B-S-F-W-VU-RC
 USB-B-S-S-B-S-B-S-B-S-B-S-B-S-S-B-SM2-TR
 USB-B-S-S-B-S-S-B-S-S-B-S-S-B-S-S-B-S-S-B-S-S-B-S-S-B-S-S-B-S-S-B-S-S-B-S-S-B-S-S-B-S-S-B-S-S-B-S-S-B-S-S-S-B-S-S-S-B-S-S-S-W-SM2-TR
 USB-B-S-S-S-B-S-S-S-W-SM2-TR
 USB-B-S-S-S-B-VT-R
 USB-B-S-S-S-B-VT-R
 USB-B-S-S-S-W-SM2-TR
 USB-B-S-S-S-W-SM2-TR
 USB-B-S-S-S-W-SM2-TR
 USB-B-S-S-S-B-VT-R
 USB-A-S-S-W-SM2-TR
 USB-A-S-S-S-W-SM2-TR
 USB-A-S-S-S-W-SM2-TR
 USB-A-S-S-S-