



REV.	ECH.NO.	MODIFY.CONTENT	DATE
1	SD0905043	Initial release	5/20/09
2	SD0907005	Change The Switch Pin	7/07/09



GENERAL TOLERANCE	FILE.NO.	PART.NO.	DRAWN	MATERIAL	SCALE
X ± 0.50	114-00841	114-00841-68	CHECKED	DATE	5:1
.X ± 0.38	2	Micro SD None Push Connector Top Mount	APPROVED	2009/05/20	UNIT
.XX ± 0.25		1/2			MM
					Amphenol Shouhmin Industry

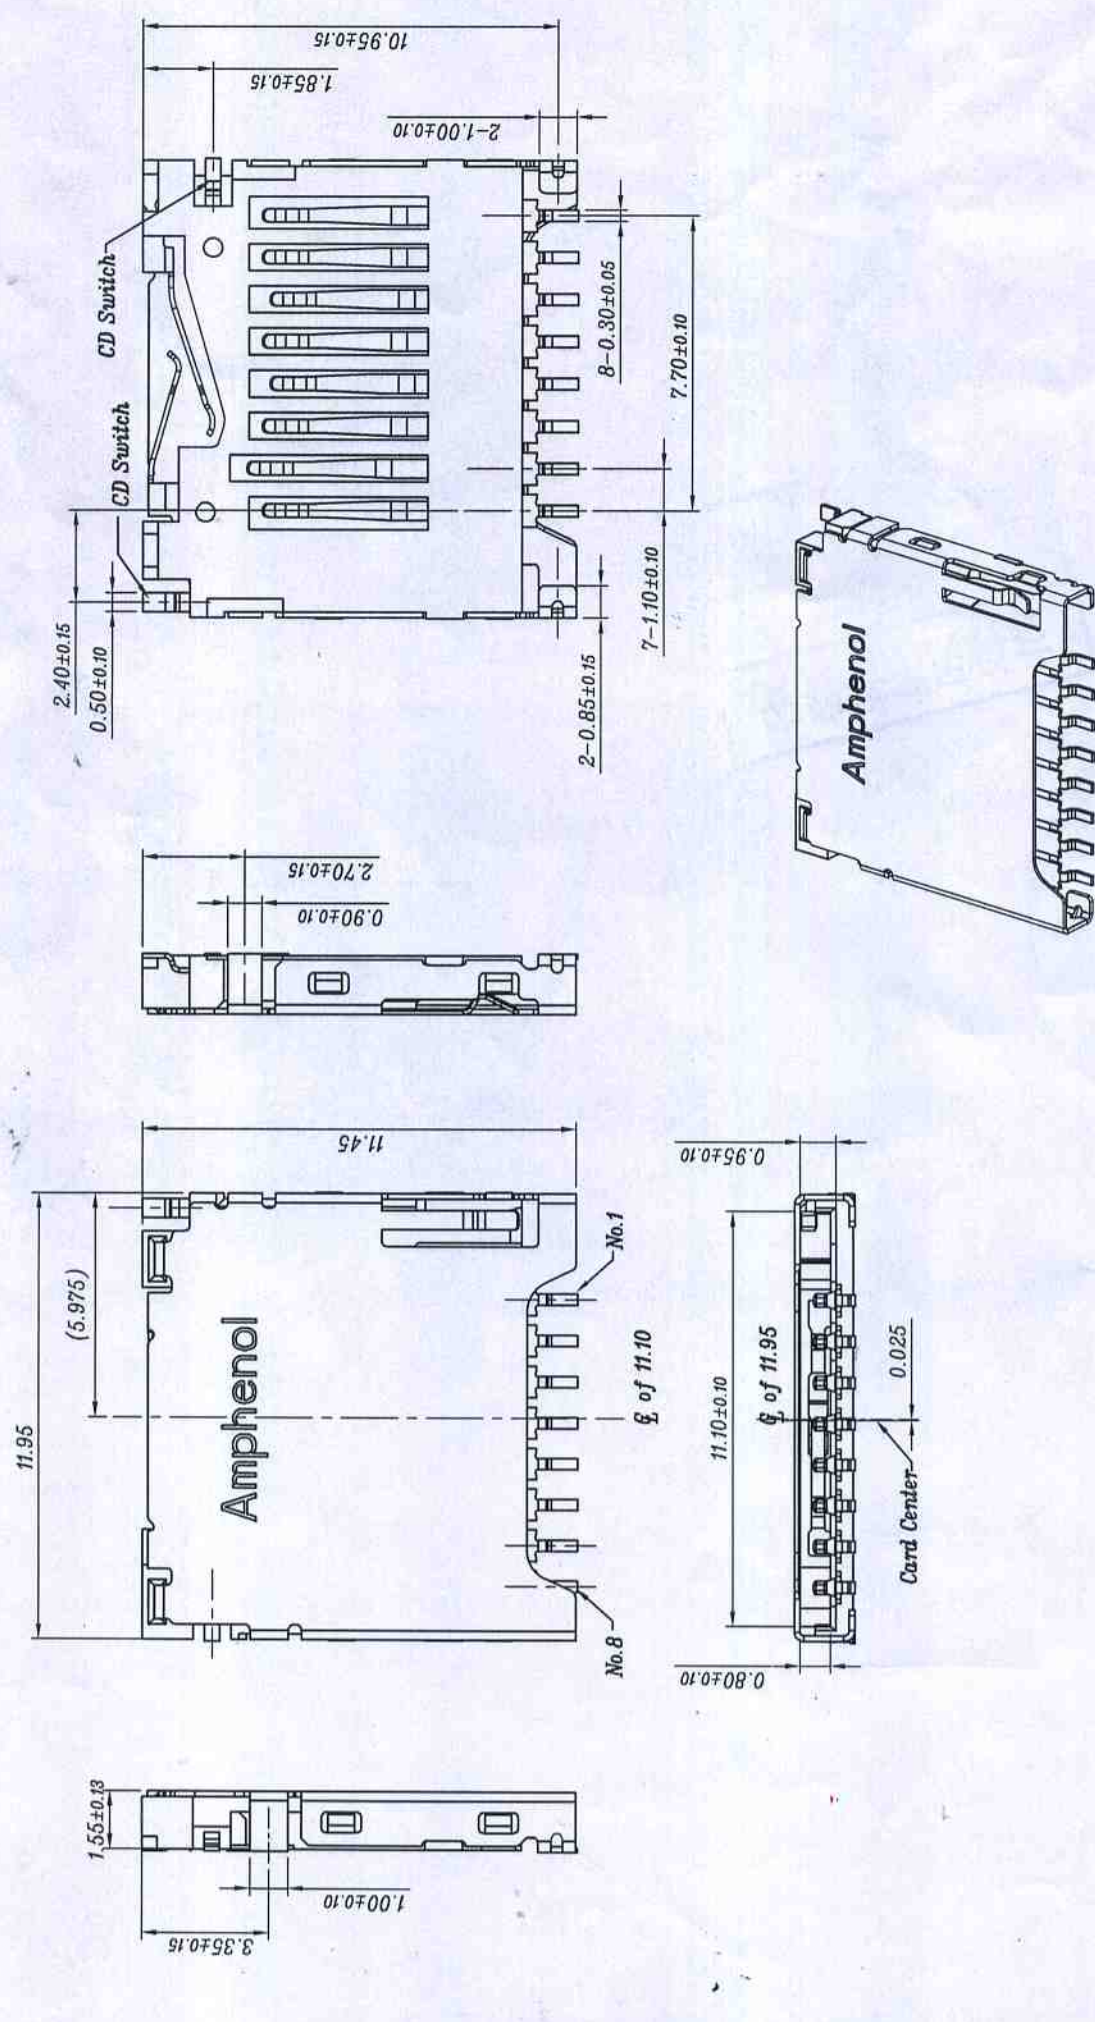


REV.	ECN NO.	MODIFY CONTENT	DATE
1	S0905048	Initial release	5/20/09
2	S0907005	Change The Switch Pin	7/01/09

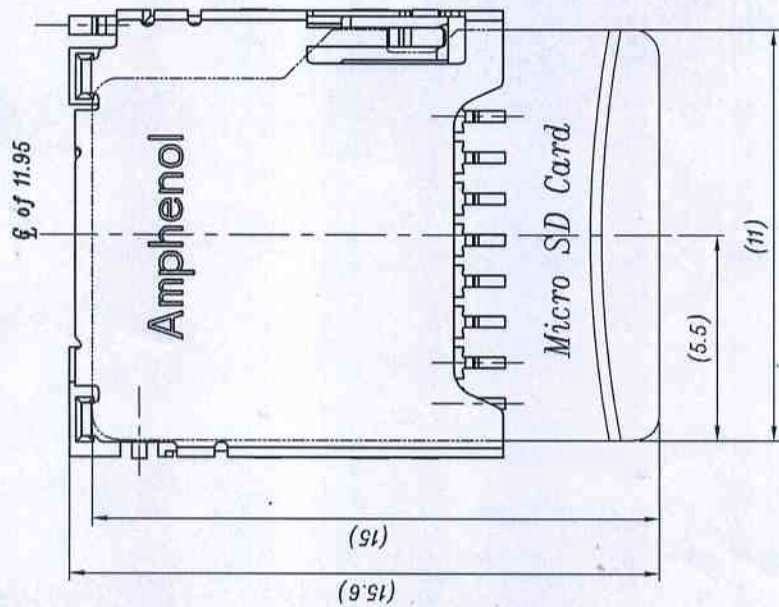


**PIN Assignments**

PIN NO.	Micro SD
1	Date Line [Bit 2]
2	Card Detect / Date Line [Bit 3]
3	Command/Response
4	Supply voltage
5	Clock
6	Supply voltage ground
7	Date Line [Bit 0]
8	Date Line [Bit 1]

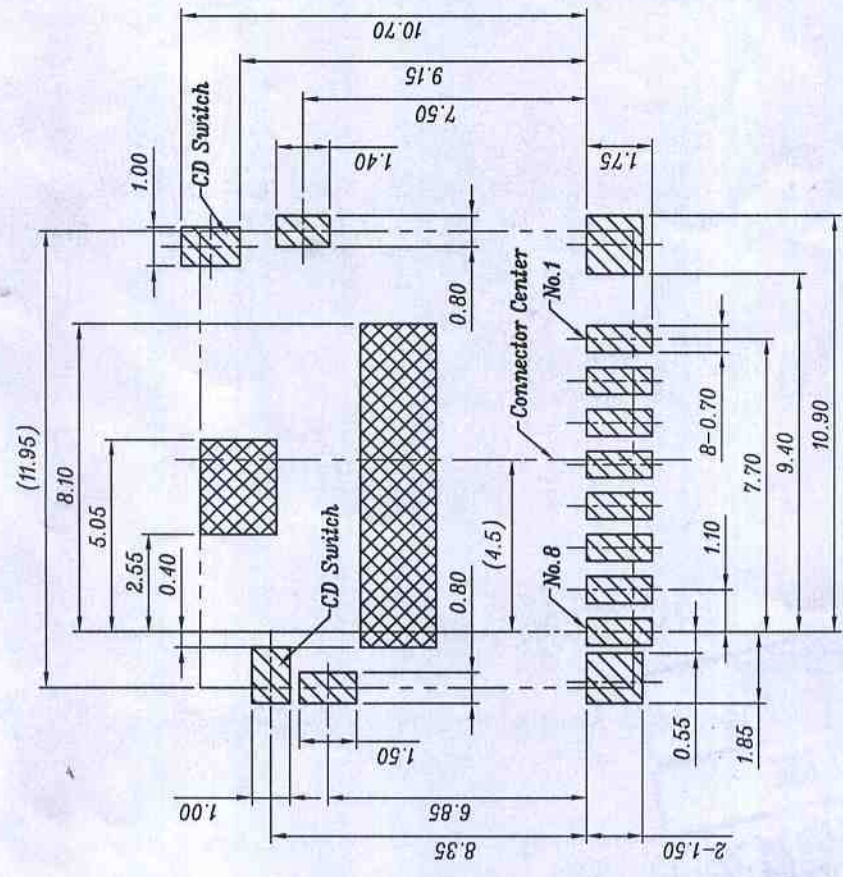

**RECOMMENDED P.C.B LAYOUT**

P.C.B TOLERANCE: ±0.05



- Note:
- Material:  
Housing: LCP Black UL 94V-0  
Contact: Copper alloy  
Shell: Stainless steel
  - Plating:  
Contact Area: Plating Au  
Solder tail: Plating Tin  
Shell: Plating weldable Ni
  - Tail Coplanarity 0.12mm Max.
  - The Part must compliant AMSI'S ROHS SPEC.

GENERAL TOLERANCE	FILE NO.	114-00841	PART NO.	114-00841-68	DRAWN	Ray lee	MATERIAL		SCALE	5:1
X: ± 0.50	REV.	2	TITLE	Micro SD None Push Connector Top Mount	CHECKED	Jane	DATE	2009/05/20	UNIT	MM
.X ± 0.38	SIZE	A4	SHEET	2/2	APPROVED	Henry Wang				
.XX ± 0.25										
Amphenol Shouhmin Industry										