



Bestückungsplan / contact layout

■ bestückt / assembled

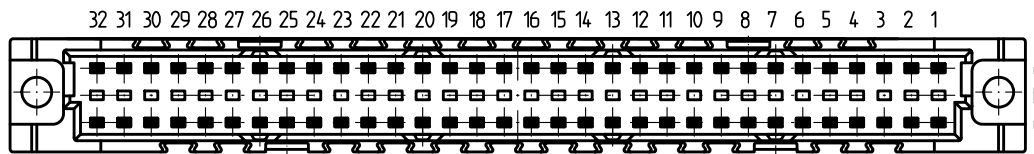

Leiterplatten-Lochbild / PCB drillhole pattern

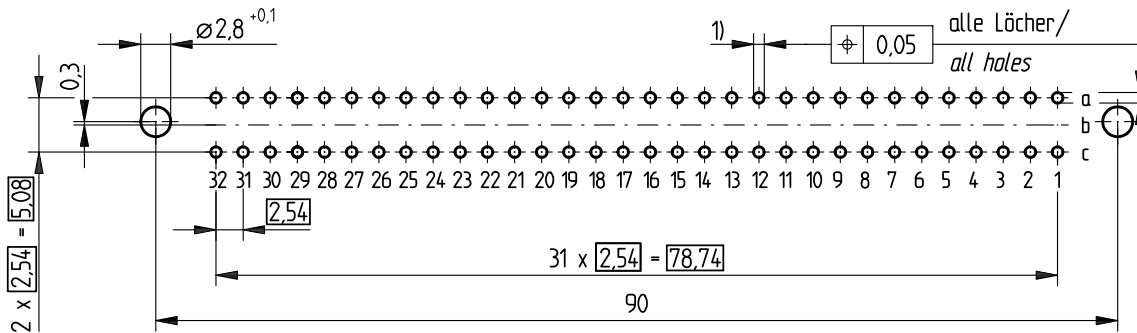

Elastische Einpresszone / compliant pressfit zone

Isolierwerkstoff / housing material : PBT GF30

Bauart 7 / type 7

Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles

Fehlende Masse und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2

Schichtaufbau im metallisierten Loch siehe Zeichnung 114124

diameter of drilled hole see drawing 114124

1) $\varnothing 1,0 \begin{matrix} +0,09 \\ -0,06 \end{matrix}$ Durchmesser des metallisierten Loches

$\varnothing 1,0 \begin{matrix} +0,09 \\ -0,06 \end{matrix}$ Diameter of finished plated-through hole

$\varnothing 1,15 \pm 0,025$ Bohrungsdurchmesser des Loches

$\varnothing 1,15 \pm 0,025$ Diameter of drilled hole

Steckbare Codierung / Plugable Coding

Information:	Tolerances	 All Dimensions in mm	Scale	2:1
	All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Designation Federleiste C 64 EE Fem. Connector C 64 Pressfit	
Subject to modification without prior notice. Drawing will not be updated.		 www.ERNI.com	244268	
Index	Date		H:00056797.SZA	STVC

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[244268](#) [244268-E](#)