

# TMC 71C 15A - Thermomagnetic device circuit breaker



1019983

<https://www.phoenixcontact.com/us/products/1019983>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Thermomagnetic device circuit breaker, number of positions: 1, cross section: 1 mm<sup>2</sup>- 35 mm<sup>2</sup>, AWG: 18 - 2, mounting type: DIN rail: 35 mm

## Commercial data

Item number	1019983
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	CL09
Product key	CLA126
GTIN	4055626508702
Weight per piece (including packing)	113.6 g
Weight per piece (excluding packing)	113.6 g
Customs tariff number	85362010
Country of origin	CN

# TMC 71C 15A - Thermomagnetic device circuit breaker



1019983

<https://www.phoenixcontact.com/us/products/1019983>

## Technical data

### Product properties

Type	DIN rail module, one-piece
Product type	Thermomagnetic device circuit breakers
Product family	TMC 7
Number of positions	1
Mechanical service life	20000

### Electrical properties

Service life electrical	6000
-------------------------	------


### General

Operating voltage	277 V AC
	60 V DC
Rated current $I_N$	15 A
Tripping method	TM (thermomagnetic)
Rated short-circuit switching capacity $I_{cn}$	7.5 kA (240 V AC/ 60 V DC)
	5 kA (277 V AC)
Fuse	C (curve)

### Connection data

Conductor cross section rigid	1 mm <sup>2</sup> ... 35 mm <sup>2</sup>
Cross section AWG	18 ... 2 (converted acc. to IEC)
Conductor cross section flexible	1 mm <sup>2</sup> ... 35 mm <sup>2</sup>
Connection method	Screw connection
Tightening torque, min	2 Nm
Stripping length	11 mm ... 12 mm
Conductor cross section flexible max.	35 mm <sup>2</sup>
Conductor cross section, rigid max.	35 mm <sup>2</sup>

### Dimensions

Dimensional drawing	
Width	17.6 mm
Height	84.3 mm
Depth	75.9 mm (incl. DIN rail 7.5 mm)

### Material specifications

Color	light grey (RAL 7035)
-------	-----------------------

# TMC 71C 15A - Thermomagnetic device circuit breaker



1019983

<https://www.phoenixcontact.com/us/products/1019983>

	gray (RAL 7042)
--	-----------------

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-35 °C ... 70 °C
Humidity test	48 h, 95% RH, 40°C (IEC 60068-2-78)
Shock (operation)	30g (11 ms) (IEC 60068-2-11, test Ea)
Vibration (operation)	±0.38 mm (10-57 Hz), 5g (57...500 Hz) (Sinusoidal test to IEC 60068-2-6, Test Fc. 10 frequency cycles per axis)

## Standards and regulations


Standards/specifications	UL 1077
Standards/specifications	IEC 60947-2

## Mounting

Mounting type	DIN rail: 35 mm
---------------	-----------------

Drawings

Diagram

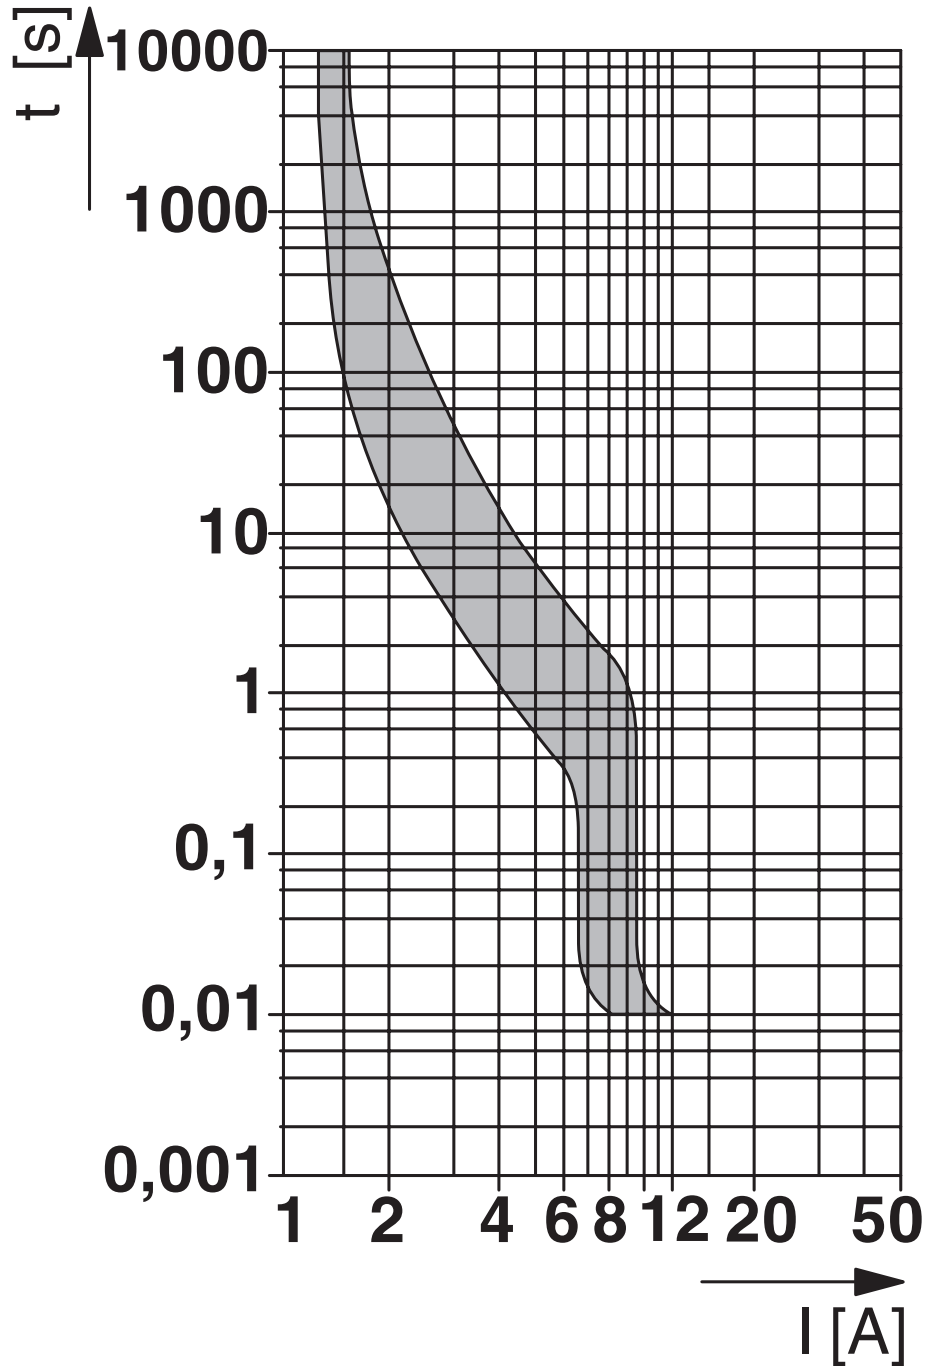


# TMC 71C 15A - Thermomagnetic device circuit breaker



1019983

<https://www.phoenixcontact.com/us/products/1019983>

Dimensional drawing

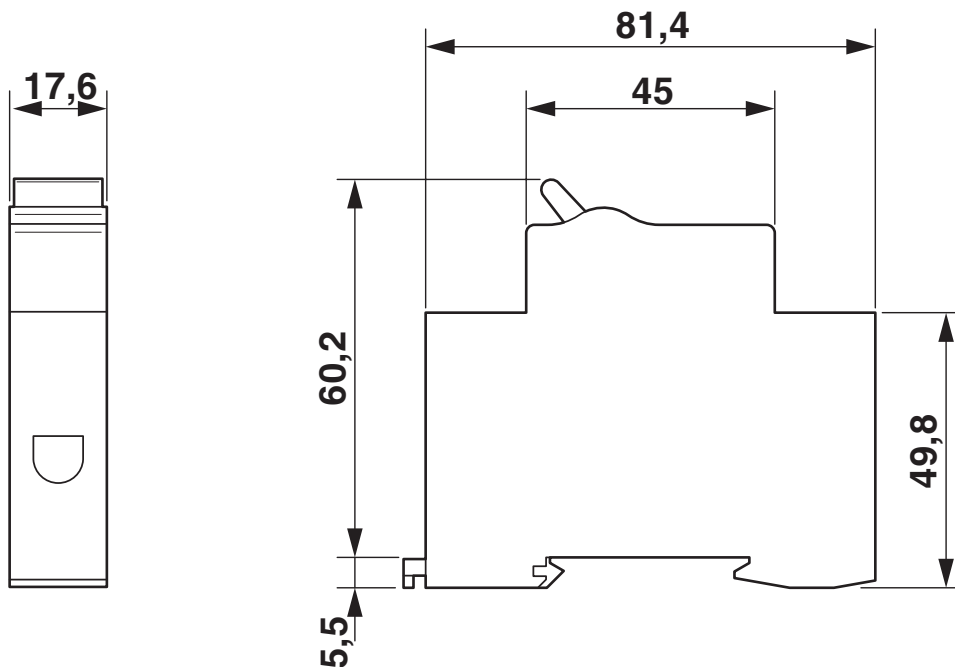

# TMC 71C 15A - Thermomagnetic device circuit breaker



1019983

<https://www.phoenixcontact.com/us/products/1019983>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1019983>



**cUL Recognized**

Approval ID: FILE E 140459



**UL Recognized**

Approval ID: FILE E 140459



**TÜV Rheinland**

Approval ID: R 50531587

**cULus Recognized**

# TMC 71C 15A - Thermomagnetic device circuit breaker



1019983

<https://www.phoenixcontact.com/us/products/1019983>

## Classifications

### ECLASS

ECLASS-11.0	27141116
ECLASS-12.0	27141116
ECLASS-13.0	27140401

### UNSPSC

UNSPSC 21.0	39121410
-------------	----------

# TMC 71C 15A - Thermomagnetic device circuit breaker



1019983

<https://www.phoenixcontact.com/us/products/1019983>

## Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values



# TMC 71C 15A - Thermomagnetic device circuit breaker



1019983


<https://www.phoenixcontact.com/us/products/1019983>

## Accessories

### TMC 7 B1 80 57 C - Wiring bridge

1022238

<https://www.phoenixcontact.com/us/products/1022238>




Bus bar for TMC 71... circuit breakers (single phase) 17.8 mm pitch, up to 57 positions. Rated for 80 A (end feed) 600 V AC/1000 V DC. UL508 Listed for connection of UL1077 rated circuit breakers.

---

### TMC 7 B1 80 37 CA - Wiring bridge

1022237

<https://www.phoenixcontact.com/us/products/1022237>



Bus bar for TMC 71... circuit breakers (single phase) with auxilliary switch module. 27.0 mm pitch, up to 37 positions. Rated for 80 A (end feed) 600 V AC/1000 V DC. UL508 Listed for connection of UL1077 rated circuit breakers.

# TMC 71C 15A - Thermomagnetic device circuit breaker



1019983

<https://www.phoenixcontact.com/us/products/1019983>

## TMC 7 B1 TERM - Terminal adapter

1022233

<https://www.phoenixcontact.com/us/products/1022233>



Feeder terminal adapter for TMC 71 circuit breakers, single-phase bus bars. Rated for 1000 V AC/DC, 115 A. Wire range 10...1/0 AWG. UL 508 Listed for connection to UL 1077 rated circuit breakers.

---

## TMC 7 B1 END CAP - Wiring bridge end cover

1022231

<https://www.phoenixcontact.com/us/products/1022231>



Protective end covers for TMC 7 single-pole bus bars

# TMC 71C 15A - Thermomagnetic device circuit breaker



1019983

<https://www.phoenixcontact.com/us/products/1019983>

## TMC 7 B BUS CAP - Protective cover

1022224

<https://www.phoenixcontact.com/us/products/1022224>



Protective covers for TMC 7 single-pole bus bars. Cuttable, five positions, yellow.

---

## TMC 7/8 AUX - Thermomagnetic device circuit breaker

2908219

<https://www.phoenixcontact.com/us/products/2908219>



Thermomagnetic device circuit breaker, number of positions: 1, connection method: Screw, cross section: 1 mm<sup>2</sup>- 35 mm<sup>2</sup>, AWG: 18 - 2, mounting type: Snaps on to side of circuit breaker

# TMC 71C 15A - Thermomagnetic device circuit breaker



1019983

<https://www.phoenixcontact.com/us/products/1019983>

## TMC 7/8 ALARM - Thermomagnetic device circuit breaker

2908220

<https://www.phoenixcontact.com/us/products/2908220>



Thermomagnetic device circuit breaker, number of positions: 1, connection method: Screw, cross section: 1 mm<sup>2</sup>- 35 mm<sup>2</sup>, AWG: 18 - 2, mounting type: Snaps on to side of circuit breaker

## TMC 7/8 12VDC SHNT - Thermomagnetic device circuit breaker

2908221

<https://www.phoenixcontact.com/us/products/2908221>



Thermomagnetic device circuit breaker, number of positions: 1, connection method: Screw, cross section: 1 mm<sup>2</sup>- 35 mm<sup>2</sup>, AWG: 18 - 2, mounting type: Snaps on to side of circuit breaker

# TMC 71C 15A - Thermomagnetic device circuit breaker



1019983

<https://www.phoenixcontact.com/us/products/1019983>

## TMC 7/8 24VDC SHNT - Thermomagnetic device circuit breaker

2908222

<https://www.phoenixcontact.com/us/products/2908222>



Thermomagnetic device circuit breaker, number of positions: 1, connection method: Screw, cross section: 1 mm<sup>2</sup>- 35 mm<sup>2</sup>, AWG: 18 - 2, mounting type: Snaps on to side of circuit breaker

## TMC 7/8 48VDC SHNT - Thermomagnetic device circuit breaker

2908224

<https://www.phoenixcontact.com/us/products/2908224>



Thermomagnetic device circuit breaker, number of positions: 1, connection method: Screw, cross section: 1 mm<sup>2</sup>- 35 mm<sup>2</sup>, AWG: 18 - 2, mounting type: Snaps on to side of circuit breaker

# TMC 71C 15A - Thermomagnetic device circuit breaker



1019983

<https://www.phoenixcontact.com/us/products/1019983>

## TMC 7/8 125VDC SHNT - Thermomagnetic device circuit breaker

2908225

<https://www.phoenixcontact.com/us/products/2908225>



Thermomagnetic device circuit breaker, number of positions: 1, connection method: Screw, cross section: 1 mm<sup>2</sup>- 35 mm<sup>2</sup>, AWG: 18 - 2, mounting type: Snaps on to side of circuit breaker

---

## TMC 7/8 120VAC SHNT - Thermomagnetic device circuit breaker

2908226

<https://www.phoenixcontact.com/us/products/2908226>



Thermomagnetic device circuit breaker, number of positions: 1, connection method: Screw, cross section: 1 mm<sup>2</sup>- 35 mm<sup>2</sup>, AWG: 18 - 2, mounting type: Snaps on to side of circuit breaker

# TMC 71C 15A - Thermomagnetic device circuit breaker



1019983

<https://www.phoenixcontact.com/us/products/1019983>

## TMC 7/8 240VAC SHNT - Thermomagnetic device circuit breaker

2908227

<https://www.phoenixcontact.com/us/products/2908227>



Thermomagnetic device circuit breaker, number of positions: 1, connection method: Screw, cross section: 1 mm<sup>2</sup>- 35 mm<sup>2</sup>, AWG: 18 - 2, mounting type: Snaps on to side of circuit breaker

---

## TMC 7/8 277VAC SHNT - Thermomagnetic device circuit breaker

2908228

<https://www.phoenixcontact.com/us/products/2908228>



Thermomagnetic device circuit breaker, number of positions: 1, connection method: Screw, cross section: 1 mm<sup>2</sup>- 35 mm<sup>2</sup>, AWG: 18 - 2, mounting type: Snaps on to side of circuit breaker

# TMC 71C 15A - Thermomagnetic device circuit breaker



1019983

<https://www.phoenixcontact.com/us/products/1019983>

## EML (10X4)R - Label

0815583

<https://www.phoenixcontact.com/us/products/0815583>



Label, Roll, white, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, mounting type: adhesive, lettering field size: 10 x 4 mm, Number of individual labels: 10000

---

## TML (104X3,8)R - Marker strip

0801833

<https://www.phoenixcontact.com/us/products/0801833>



Marker strip, Roll, white, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, mounting type: adhesive, for terminal block width: 104 mm, lettering field size: 104 x 3.8 mm, Number of individual labels: 2500



# TMC 71C 15A - Thermomagnetic device circuit breaker



1019983

<https://www.phoenixcontact.com/us/products/1019983>

## SZK PZ2 VDE - Screwdriver

1206463

<https://www.phoenixcontact.com/us/products/1206463>



Screwdriver, PZ crosshead, VDE insulated, size: PZ 2 x 100 mm, 2-component grip, with non-slip grip

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)