

DESCRIPTION

The NEXEM EM1 series is PC-board mount type and suitable for lamps, C-R circuits, heaters, fans and pumps, etc. controls application for automobiles which require high quality and high performance.

The EM1 series have higher switching performance than the current relays like EP1, ET1 and EX1 series.

FEATURE

- Suitable for large inrush current load, such as lamps, and C-R circuits, etc.
- Large current capacity (54A 1hour at 20°C)
- High heat resistance
- Flux tight housing
- Pb free
- Through-hole reflow soldering available

APPLICATION

- Lamp control
- C-R circuit control
- Heater control
- Motor control such as fans and pumps

**For Proper Use of Miniature Relays**
DO NOT EXCEED MAXIMUM RATING

Do not use relay under excessive conditions such as over ambient temperature, over voltage and over current. Incorrect use could result in abnormal heating and damage to the relay or other parts.

READ CAUTIONS IN THE SELECTION GUIDE

Read the cautions described in EM Devices' "Miniature Relays" before dose designing your relay applications.


The information in this document is subject to change without notice.

© EM Devices Corporation 2018






- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "NOTE ON CORRECT USE" in "Miniature Relays selection guide" catalog.

SCHEMATIC (BOTTOM VIEW)




1 form U

DIMENSIONS [mm]

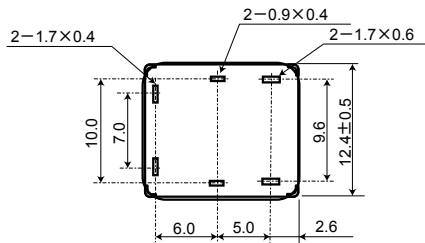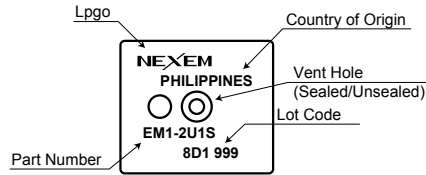

* After soldering

PCB PAD LAYOUT [mm] (BOTTOM VIEW)



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "NOTE ON CORRECT USE" in "Miniature Relays selection guide" catalog.

SPECIFICATIONS (Ambient temperature:20°C)

Items		Specifications	
Contact Form		1 Form U	
Contact Ratings	Maximum Switching Voltage	16VDC	
	Maximum Switching Current	100A ON / 60A OFF at 14VDC (Resistive, 10 operations)	
	Minimum Switching Current	1A (5VDC)	
	Maximum Carrying Current	54A at 14VDC for 1hour ^{*1}	
	Contact Resistance	2.5mΩ typical (measured at 7A) initial	
Contact Material		Silver oxide complex alloy	
Operate Time (Excluding bounce)		6ms typical (at Nominal Voltage)	
Release Time (Excluding bounce)		1ms typical (at Nominal Voltage, without diode) initial	
Nominal Operating Power		640 mW	
Insulation Resistance		100 MΩ at 500 VDC	
Withstand Voltage	Between open contacts	500 VAC min. (for 1 minute)	
	Between coil and contacts	500 VAC min. (for 1 minute)	
Shock Resistance	Misoperation	98 m/s ²	
	Destructive Failure	980 m/s ²	
Vibration Resistance	Misoperation	10 to 300 Hz, 43 m/s ²	
	Destructive Failure	10 to 500Hz, 43m/s ² , 200hours	
Ambient Temperature		- 40 to + 125°C	
Running Specifications	Non-load	1 × 10 ⁶ operations	
	Load	Resistive	100 × 10 ³ operations (at 14VDC, 40A)
		Lamp	100 × 10 ³ operations (at 14VDC, Inrush 120A/ Steady 14A)
Weight		Approx. 8g	

*1 Mounted on PC-board: FR-4 (thickness: 1.6mm); Copper (thickness: 105 μm & width: 15mm)

This is the allowable value at abnormal case such as fuse blow. And cyclical current is not guaranteed.

COIL RATING (Ambient temperature:20°C)


Part Numbers	Nominal Voltage (VDC)	Coil Resistance (Ω) ± 10%	Must Operate Voltage ^{*2} (VDC)	Must Release Voltage ^{*2} (VDC)
EM1-2U1	12	225	6.5	0.9

*2 Test by pulse voltage




- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "NOTE ON CORRECT USE" in "Miniature Relays selection guide" catalog.

PART NUMBER SYSTEM

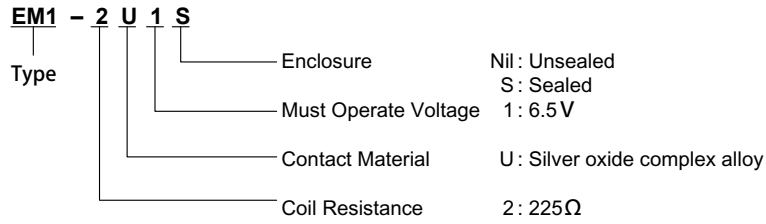


COIL DRIVE CIRCUIT


Recommended Circuit



(a)




(b)



(c)

Non-recommended Circuit



(d)

(NOTE)

EM Devices recommends coil drive circuit (b) and (c) for coil flyback suppression, However, EM Devices does not recommend the circuit (d) because EM1 relay's performance is not yet enough.





- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "NOTE ON CORRECT USE" in "Miniature Relays selection guide" catalog.

TECHNICAL DATA

Coil Temperature Rise






(Ambient Temperature 20°C)

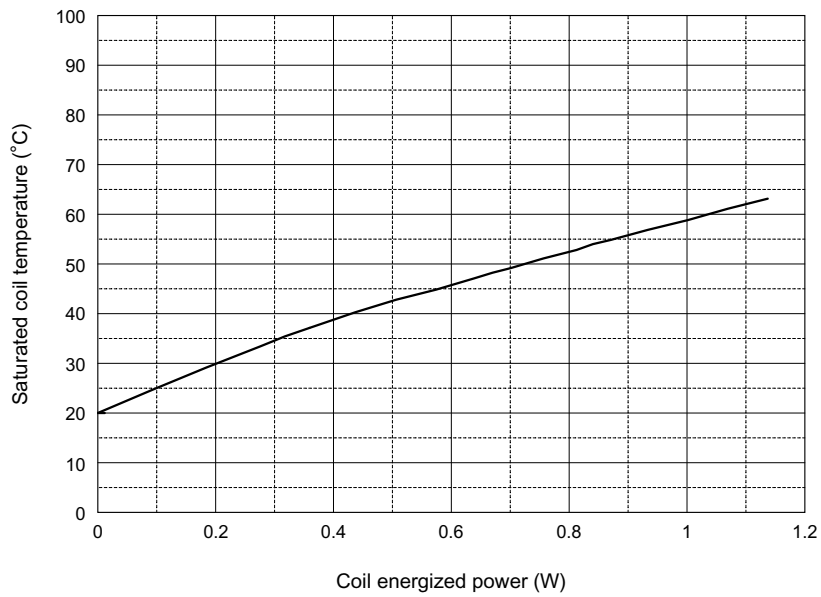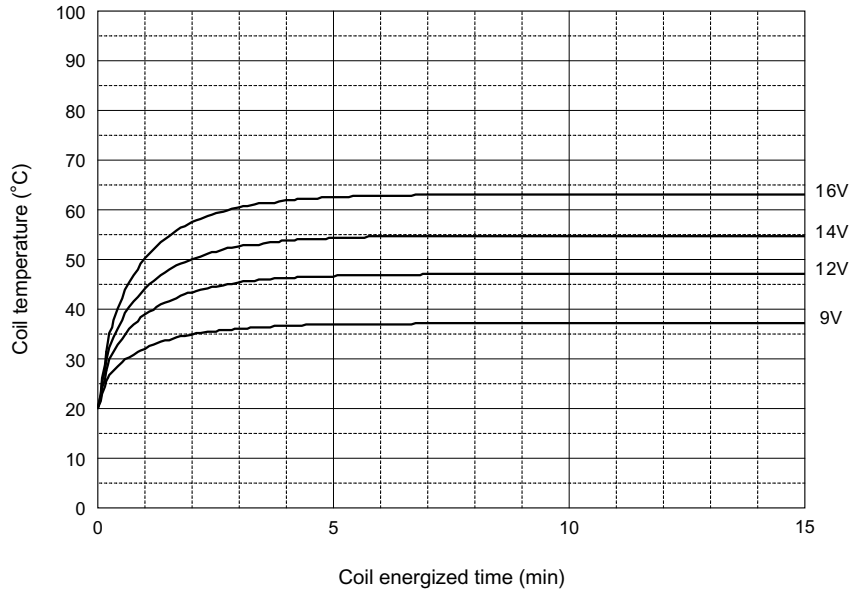

- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "NOTE ON CORRECT USE" in "Miniature Relays selection guide" catalog.

RELAY CHARACTERISTICS DISTRIBUTION (INITIAL)







Specimen : EM1-2U1S
 Ambient Temperature : 20°C
 Quantity : 25pcs.

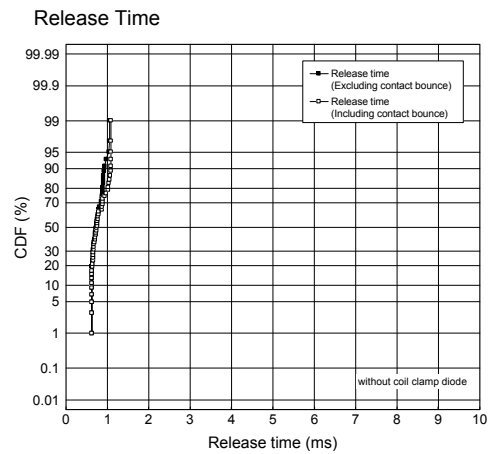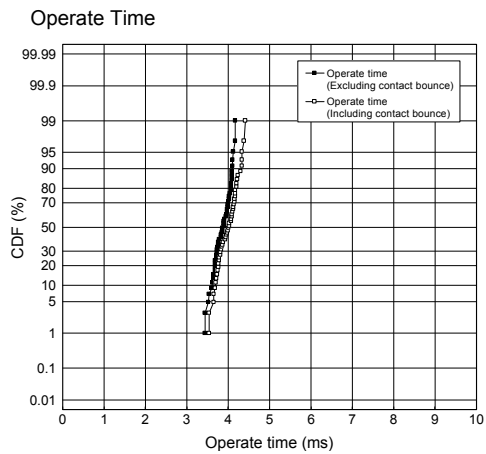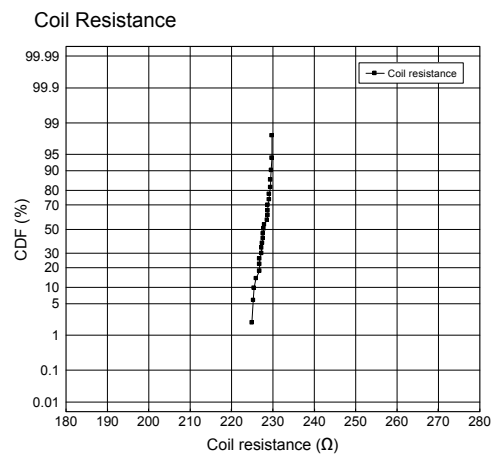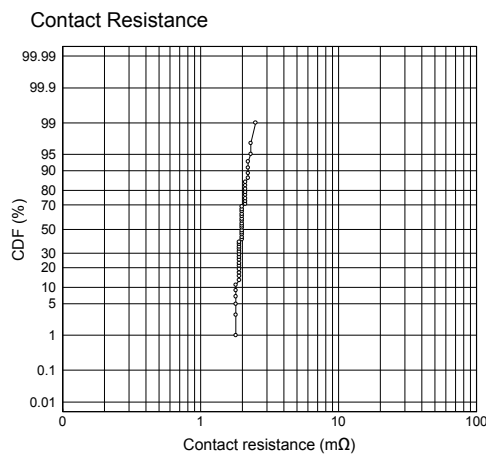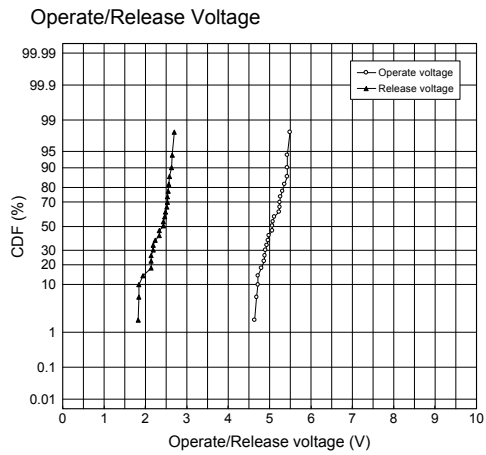

- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "NOTE ON CORRECT USE" in "Miniature Relays selection guide" catalog.

ELECTRICAL LIFE TEST (14VDC- 40A, Resistive load)







Test items	Test conditions	Samples
1. Operate voltage 2. Release voltage 3. Contact resistance 4. Coil resistance 5. Operate time 6. Release time (without coil clamp diode)	Temperature : 20°C Frequency : 1Hz(0.1s ON, 0.9s OFF) Contact load : 14VDC-40A, Resistive Number of operations : 100 x 10 ³	EM1-2U1S 5 pcs

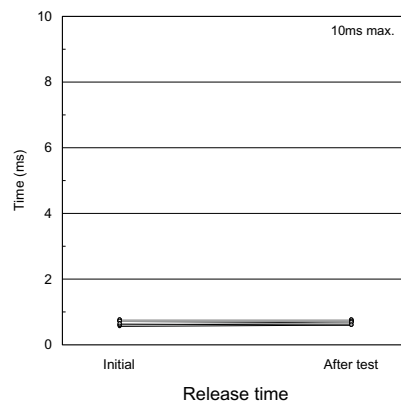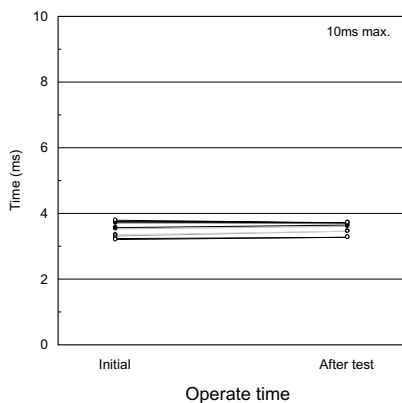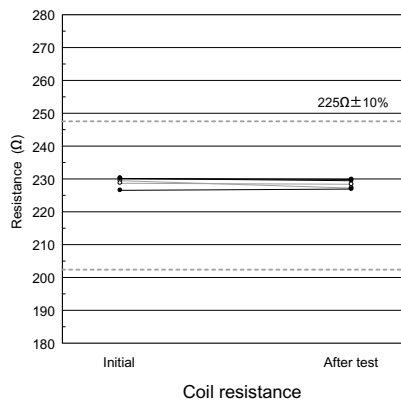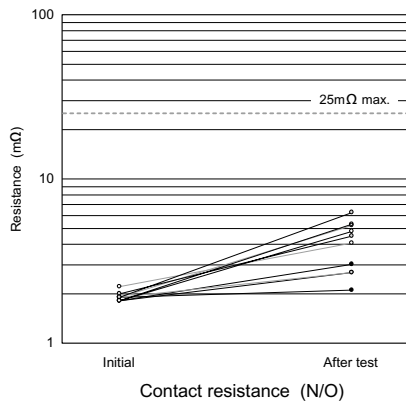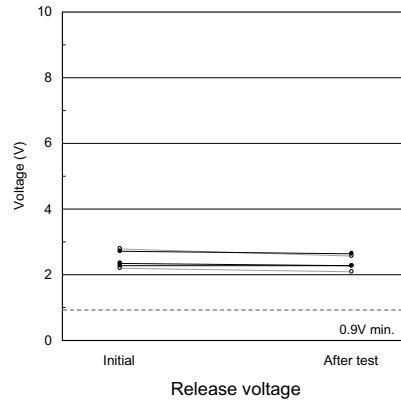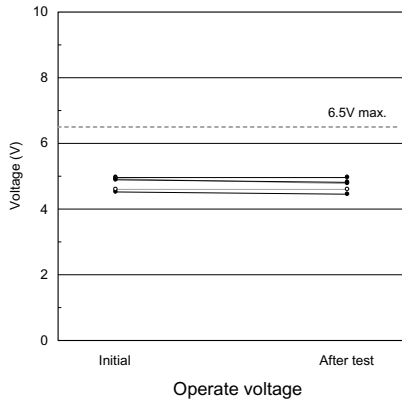

● All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
 ● Please request for a specification sheet for detailed product data prior to the purchase.
 ● Before using the product in this catalog, please read "NOTE ON CORRECT USE" in "Miniature Relays selection guide" catalog.

ELECTRICAL LIFE TEST (14VDC, Inrush current 120A, Lamp load)

Test items	Test conditions	Samples
1. Operate voltage 2. Release voltage 3. Contact resistance 4. Coil resistance 5. Operate time 6. Release time (without coil clamp diode)	Temperature : 20°C Frequency : 0.67Hz (0.2s ON, 1.3s OFF) Contact load : 14VDC, Inrush current 120A, Steady current 14A Number of operations : 100 x 10 ³	EM1-2U1S 5 pcs

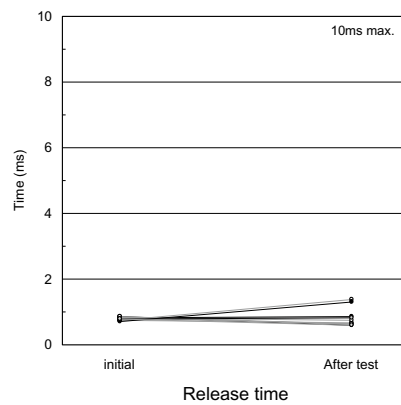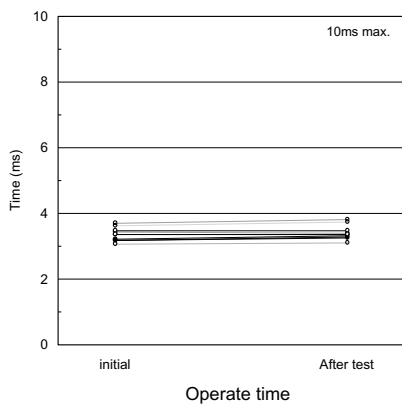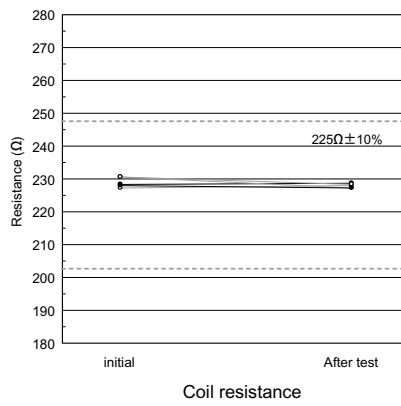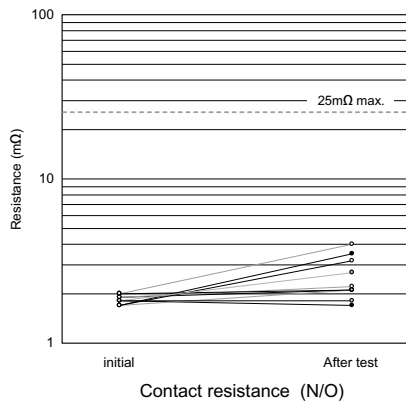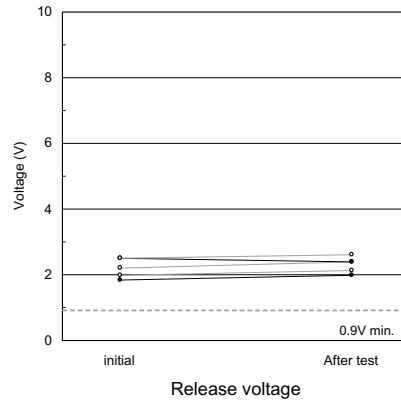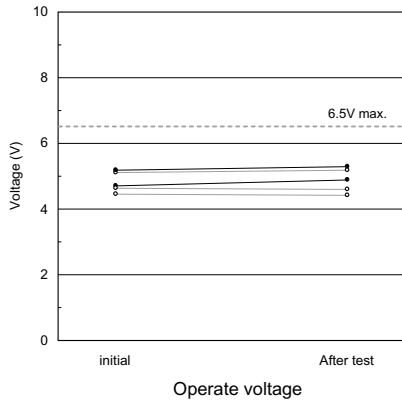

● All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
 ● Please request for a specification sheet for detailed product data prior to the purchase.
 ● Before using the product in this catalog, please read "NOTE ON CORRECT USE" in "Miniature Relays selection guide" catalog.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[KEMET:](#)

[EM1-2U1S](#)