

2278500

https://www.phoenixcontact.com/us/products/2278500

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



DIN rail housing for use in distribution boards in accordance with DIN 43880, Lower housing part with base latch, width: 161.6 mm, height: 89.7 mm, depth: 48.9 mm, color: black (similar RAL 9005), cross connection: DIN rail connector (optional), number of positions cross connector: 16

Your advantages

- · Coordinated housing and connection system for faster device development
- · Individual online configuration for diverse applications in building automation
- · Variety of connection technology
- · Can be mounted on the DIN rail or the wall
- · With DIN-rail-mountable bus connector and power connector system as an option
- · Tool-free mounting
- Available in overall widths from one to nine HP (17.8 mm ... 161.6 mm)
- Compliant with DIN□EN□43880

Commercial data

Item number	2278500
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	AC10
Product key	ACHBAA
Catalog page	Page 700 (C-1-2013)
GTIN	4046356299497
Weight per piece (including packing)	90.11 g
Weight per piece (excluding packing)	82.58 g
Customs tariff number	84879090
Country of origin	DE



2278500

https://www.phoenixcontact.com/us/products/2278500

Technical data

Notes

General	Refer to the data sheet for the range in the download area.

Product properties

Product type	Enclosure bottom part
Housing series	BC
Product family	BC UT HBUS
Туре	Lower housing part with base latch
Housing type	DIN rail housing for use in distribution boards in accordance with DIN 43880
Ventilation openings present	no

Dimensions

Dimensional drawing	d
Width	161.6 mm
Height	89.7 mm
Depth	48.9 mm
Horizontal pitch	9 Div.
PCB design	
PCB thickness	1.4 mm 1.8 mm

Material specifications

Color (Housing)	black (RAL 9005)
Flammability rating according to UL 94	V0
CTI according to IEC 60112	< 400
Surface characteristics	untreated
Housing material	Polycarbonate

Environmental and real-life conditions

Power dissipation single housing for 20 °C

Ambient temperature	20 °C
Reduction factor	1
Mounting position	vertical
Power dissipation	16.95 W



2278500

https://www.phoenixcontact.com/us/products/2278500

Power dissipation single housing for 30 °C	
Ambient temperature	30 °C
Reduction factor	0.84
Mounting position	vertical
Power dissipation	14.2 W
Power dissipation single housing for 40 °C	
Ambient temperature	40 °C
Reduction factor	0.72
Mounting position	vertical
Power dissipation	12.2 W
Power dissipation single housing for 50 °C	
Ambient temperature	50 °C
Reduction factor	0.6
Mounting position	vertical
Power dissipation	10.2 W
Power dissipation single housing for 60 °C Ambient temperature	60 °C
Reduction factor	0.48
Mounting position Power dissipation	vertical 8.1 W
Power dissipation single housing for 70 °C Ambient temperature Reduction factor	70 °C 0.38
Mounting position	vertical
Power dissipation	6.4 W
/ibration test	
Specification	IEC 60068-2-6:2007-12
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.15 mm (10 Hz 58.1 Hz)
Acceleration	2g (58.1 Hz 150 Hz)
Test duration per axis	2.5 h
Test directions	X-, Y- and Z-axis
Glow-wire test	
Specification	IEC 60695-2-11:2014-02
Temperature	850 °C
Time of exposure	30 s
Mechanical strength / tumbling barrel	
Specification	IEC 60068-2-31:2008-05
Height of fall	50 cm



2278500

https://www.phoenixcontact.com/us/products/2278500


Frequency	50
Shocks	
Specification	IEC 60068-2-27:2008-02
Pulse shape	Half-sine
Acceleration	15g
Shock duration	11 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Degree of protection (IP code)	
Specification	IEC 60529:1989-11 + AMD 1:1999-11 + AMD 2:2013-08
and the state of t	
Ambient conditions	IDOO
Max. IP code to attain	IP20
Ambient temperature (operation)	-40 °C 105 °C (depending on power dissipation)
Ambient temperature (storage/transport)	-40 °C 70 °C
Ambient temperature (assembly)	-5 °C 100 °C
Relative humidity (storage/transport)	95 %
B data	
Number of PCB holders	9
Type of PCB mount	Latching
Thickness of the PCB	1.4 mm 1.8 mm
unting	
unting	
Mounting type	DIN rail mounting/wall mounting
Mounting position	Vertical (horizontal DIN rail)
ckaging specifications	
Type of packaging	packed in cardboard
Outer packaging type	Carton



2278500

https://www.phoenixcontact.com/us/products/2278500

Drawings

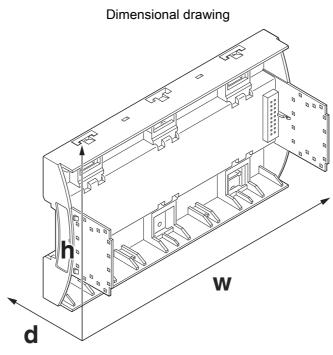

Schematic figure for illustrating the item dimensions. The figure is not of the desired product. For further details, refer to the product drawings in the "Downloads" tab.



2278500

https://www.phoenixcontact.com/us/products/2278500

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/2278500



UL RecognizedApproval ID: FILE E 240868



2278500

https://www.phoenixcontact.com/us/products/2278500

Classifications

ECLASS

	ECLASS-11.0	27182702
	ECLASS-13.0	27190601
ΕΊ	ГІМ	
	ETIM 9.0	EC001031
UNSPSC		
	UNSPSC 21.0	31261500

Feb 16, 2024, 5:57 PM Page 7 (32)



2278500

https://www.phoenixcontact.com/us/products/2278500

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values



2278500

https://www.phoenixcontact.com/us/products/2278500

Mandatory accessories

BC 161,6 OT U11 KMGY - Upper housing part

2278513

https://www.phoenixcontact.com/us/products/2278513



DIN rail housing for use in distribution boards in accordance with DIN 43880, Upper housing part (U11) with vents, Installation depth connection technology: 11.1 mm, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light grey (similar RAL 7035)

BC 161,6 OT U22 KMGY - Upper housing part

2278526

https://www.phoenixcontact.com/us/products/2278526



DIN rail housing for use in distribution boards in accordance with DIN 43880, Upper housing part (U22) with vents, Installation depth connection technology: 22.35 mm, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light grey (similar RAL 7035)



2278500

https://www.phoenixcontact.com/us/products/2278500

BC 161,6 OT U11 BK - Upper housing part

2202833

https://www.phoenixcontact.com/us/products/2202833



DIN rail housing for use in distribution boards in accordance with DIN 43880, Upper housing part (U11) with vents, Installation depth connection technology: 11.1 mm, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: black (similar RAL 9005)

BC 161,6 OT U22 BK - Upper housing part

2201665

https://www.phoenixcontact.com/us/products/2201665



DIN rail housing for use in distribution boards in accordance with DIN 43880, Upper housing part (U22) with vents, Installation depth connection technology: 22.35 mm, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: black (similar RAL 9005)



2278500

https://www.phoenixcontact.com/us/products/2278500

BC 161,6 OT 111112 BK - Upper housing part

2201977

https://www.phoenixcontact.com/us/products/2201977



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: black (similar RAL 9005)

BC 161,6 OT 222121 BK - Upper housing part

1046793

https://www.phoenixcontact.com/us/products/1046793





2278500

https://www.phoenixcontact.com/us/products/2278500

BC 161,6 OT 111122 KMGY - Upper housing part

2201919

https://www.phoenixcontact.com/us/products/2201919



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light grey (similar RAL 7035)

BC 161,6 OT 012122 KMGY - Upper housing part

2203722

https://www.phoenixcontact.com/us/products/2203722





2278500

https://www.phoenixcontact.com/us/products/2278500

BC 161,6 OT 000020 KMGY - Upper housing part

2201450

https://www.phoenixcontact.com/us/products/2201450



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light grey (similar RAL 7035)

BC 161,6 OT 110021 KMGY - Upper part of housing

1208340

https://www.phoenixcontact.com/us/products/1208340





2278500

https://www.phoenixcontact.com/us/products/2278500

BC 161,6 OT 001101 KMGY - Upper housing part

2202284

https://www.phoenixcontact.com/us/products/2202284



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light grey (similar RAL 7035)

BC 161,6 OT 111112 KMGY - Upper housing part

2202638

https://www.phoenixcontact.com/us/products/2202638





2278500

https://www.phoenixcontact.com/us/products/2278500

BC 161,6 OT 112111 KMGY - Upper part of housing

1255434

https://www.phoenixcontact.com/us/products/1255434



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light grey (similar RAL 7035)

BC 161,6 OT 000022 KMGY - Upper housing part

2201454

https://www.phoenixcontact.com/us/products/2201454





2278500

https://www.phoenixcontact.com/us/products/2278500

BC 161,6 OT 100202 KMGY - Upper housing part

2201976

https://www.phoenixcontact.com/us/products/2201976



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light grey (similar RAL 7035)

BC 161,6 OT 111121 KMGY - Upper housing part

2201982

https://www.phoenixcontact.com/us/products/2201982





2278500

https://www.phoenixcontact.com/us/products/2278500

BC 161,6 OT 111101 KMGY - Upper housing part

2203095

https://www.phoenixcontact.com/us/products/2203095



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light grey (similar RAL 7035)

BC 161,6 OT 212121 KMGY - Upper housing part

2201869

https://www.phoenixcontact.com/us/products/2201869





2278500

https://www.phoenixcontact.com/us/products/2278500

BC 161,6 OT 112122 KMGY - Upper housing part

2201881

https://www.phoenixcontact.com/us/products/2201881



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light grey (similar RAL 7035)

BC 161,6 OT 210021 KMGY - Upper housing part

2201984

https://www.phoenixcontact.com/us/products/2201984





2278500

https://www.phoenixcontact.com/us/products/2278500

BC 161,6 OT U11 BK VPE80 - Upper housing part

1006944

https://www.phoenixcontact.com/us/products/1006944



DIN rail housing for use in distribution boards in accordance with DIN 43880, Upper housing part (U11) with vents, Installation depth connection technology: 11.1 mm, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: black (similar RAL 9005)

BC 161,6 OT 212122 KMGY VPE80 - Upper housing part

1015337

https://www.phoenixcontact.com/us/products/1015337





2278500

https://www.phoenixcontact.com/us/products/2278500

BC 161,6 OT 0C20C20C2 KMGY - Upper housing part

1218565

https://www.phoenixcontact.com/us/products/1218565



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light grey (similar RAL 7035)

BC 161,6 OT 002000 KMGY - Upper housing part

2201451

https://www.phoenixcontact.com/us/products/2201451





2278500

https://www.phoenixcontact.com/us/products/2278500

BC 161,6 OT 0C20C20C2 WH - Upper part of housing

1252986

https://www.phoenixcontact.com/us/products/1252986



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: traffic white (similar RAL 9016)

BC 161,6 OT 000C0C22 KMGY - Upper housing part

2201678

https://www.phoenixcontact.com/us/products/2201678





2278500

https://www.phoenixcontact.com/us/products/2278500

BC 161,6 OT 121222 KMGY MOQ100 - Upper housing part

2202355

https://www.phoenixcontact.com/us/products/2202355



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light grey (similar RAL 7035)

BC 161,6 OT 110212 KMGY MOQ100 - Upper housing part

1153038

https://www.phoenixcontact.com/us/products/1153038





2278500

https://www.phoenixcontact.com/us/products/2278500

BC 161,6 OT 121222 BK VPE80 - Upper housing part

1059320

https://www.phoenixcontact.com/us/products/1059320



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: black (similar RAL 9005)

BC 161,6 OT 102222 KMGY MOQ100 - Upper housing part

2202202

https://www.phoenixcontact.com/us/products/2202202





2278500

https://www.phoenixcontact.com/us/products/2278500

BC 161,6 OT 001112 KMGY MOQ100 - Upper housing part

2202287

https://www.phoenixcontact.com/us/products/2202287



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light grey (similar RAL 7035)

BC 161,6 OT 221111 KMGY MOQ100 - Upper housing part

2202300

https://www.phoenixcontact.com/us/products/2202300





2278500

https://www.phoenixcontact.com/us/products/2278500

BC 161,6 OT 110202 KMGY VPE80 - Upper housing part

1080949

https://www.phoenixcontact.com/us/products/1080949



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light grey (similar RAL 7035)

BC 161,6 OT 101111 KMGY MOQ100 - Upper housing part

2202201

https://www.phoenixcontact.com/us/products/2202201





2278500

https://www.phoenixcontact.com/us/products/2278500

BC 161,6 OT 020001 KMGY MOQ100 - Upper housing part

2202224

https://www.phoenixcontact.com/us/products/2202224



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light grey (similar RAL 7035)

BC 161,6 OT 000C020 KMGYMOQ100 - Upper housing part

2202372

https://www.phoenixcontact.com/us/products/2202372





2278500

https://www.phoenixcontact.com/us/products/2278500

BC 161,6 OT 202220 KMGY VPE80 - Upper housing part

1074661

https://www.phoenixcontact.com/us/products/1074661



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light grey (similar RAL 7035)

BC 161,6 OT 101100 KMGY VPE80 - Upper housing part

2202324

https://www.phoenixcontact.com/us/products/2202324





2278500

https://www.phoenixcontact.com/us/products/2278500

BC 161,6 OT 220222 KMGY MOQ100 - Upper housing part

1126202

https://www.phoenixcontact.com/us/products/1126202



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light grey (similar RAL 7035)

BC 161,6 OT 0C0C0C0C22 KMGY - Upper housing part

2201455

https://www.phoenixcontact.com/us/products/2201455





2278500

https://www.phoenixcontact.com/us/products/2278500

BC 161,6 OT 000000 KMGY MOQ100 - Upper housing part

2202926

https://www.phoenixcontact.com/us/products/2202926



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light grey (similar RAL 7035)

BC 161,6 OT 112122 KMGY MOQ100 - Upper part of housing

2202326

https://www.phoenixcontact.com/us/products/2202326





2278500

https://www.phoenixcontact.com/us/products/2278500

BC 161,6 OT 1C1C2C2C1C1C KMGY - Upper housing part

1096568

https://www.phoenixcontact.com/us/products/1096568



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light grey (similar RAL 7035)

BC 161,6 OT 120202 KMGY MOQ100 - Upper housing part

1087950

https://www.phoenixcontact.com/us/products/1087950



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light grey (similar RAL 7035)

Accessories



2278500

https://www.phoenixcontact.com/us/products/2278500

FUSSRIEGEL 14,4 L30 SPERR OG - Base latch

2896998

https://www.phoenixcontact.com/us/products/2896998



DIN rail housing for use in distribution boards in accordance with DIN 43880, Base latch, width: 14.4 mm, height: 29.8 mm, depth: 5.9 mm, color: orange (similar RAL 2003)

HBUS 161,6-16P-1S BK - DIN rail bus connectors

2278555

https://www.phoenixcontact.com/us/products/2278555



DIN rail connector, color: black, nominal current: 3 A (Total current of 25 A max.), rated voltage (III/2): 30 V, number of positions: 16, pitch: 2.54 mm, mounting: DIN rail mounting, locking: without



2278500

https://www.phoenixcontact.com/us/products/2278500

PSTD 0,65X0,65/9-2,54 - Pin strip

2200700

https://www.phoenixcontact.com/us/products/2200700



Pin strip, color: black, contact connection type: Pin, number of potentials: 18, number of rows: 2, number of positions: 18, number of connections: 18, product range: PSTD 0,65X0,65/..-V, pitch: 2.54 mm, mounting: THR soldering, pin layout: Linear pinning, solder pin [P]: 2.5 mm, locking: without, type of packaging: packed in cardboard

HBUS8 161,6-8P-1S BK - DIN rail bus connectors

1249066

https://www.phoenixcontact.com/us/products/1249066



DIN rail connector, color: black, nominal current: 3 A (per contact), rated voltage (III/2): 100 V, number of positions: 8, pitch: 2.54 mm, mounting: DIN rail mounting, locking: without

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com