

Features

- 2 Watt power supply in SMD package
- -40°C to +100°C operating temperature
- 3kVDC/1 second or 1kVDC/1 second isolation
- No minimum load required
- IEC/EN/UL62368-1 certified, CB Report

Unregulated Converters

Description

The R2SX is a low profile, open-frame 2W SMD isolated DC/DC converter with either 3kVDC/1 second isolation (/H version) or 1kVDC/1 second isolation options. There is no minimum load requirement and the efficiency stays high over a wide 20% to 100% load range. The operating temperature is from -40°C up to +75°C at full load, and up to +100°C with derating. The converters are fully certified to IEC/EN/UL62368-1 and are 10/10 RoHS-conform. A simple low cost LC filter is all that is needed for Class B EMC compliance. The R2SX comes with a 3-year warranty.

Selection Guide


Part Number	nom. Input Voltage [VDC]	Output Voltage [VDC]	Output Current [mA]	Efficiency typ. ⁽¹⁾ [%]	max. Capacitive Load ⁽²⁾ [µF]
R2SX-053.3	5	3.3	606	79	3300
R2SX-0505	5	5	400	81	3300
R2SX-1205	12	5	400	84	3300
R2SX-2405	24	5	400	85	3300
R2SX-2415	24	15	133	85	680
R2SX-2424	24	24	84	86	220

Notes:

Note1: Efficiency is tested at nominal input and full load at +25°C ambient

Note2: Max Cap Load is tested at nominal input and full resistive load

Model Numbering

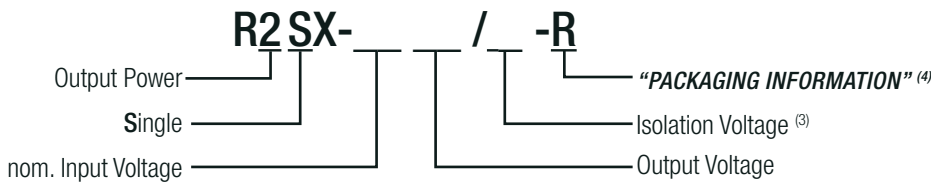

Notes:

Note3: without suffix, standard isolation voltage (1kVDC/1 second)
 with suffix „/H“, high isolation voltage (3kVDC/1 second)


Note4: with suffix „-R“, standard packaging tape and reel
 with suffix „-Tray“ for optional tray packaging

Ordering Examples:

R2SX-0505-R	5Vin	5Vout	Single Output	1kVDC/1 second isolation	tape and reel packaging
R2SX-2424/H-R	24Vin	24Vout	Single Output	3kVDC/1 second isolation	tape and reel packaging
R2SX-2424/H-Tray	24Vin	24Vout	Single Output	3kVDC/1 second isolation	tray packaging

R2SX

2 Watt
SMD
Single Output

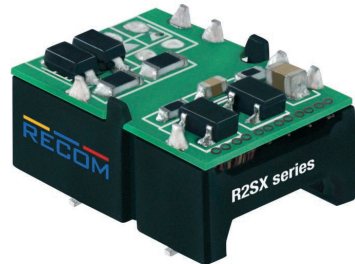

UL62368-1 certified
 CAN/CSA-C22.2 No. 62368-1-14 certified
 UL60950-1 certified
 CAN/CSA-C22.2 No. 60950-1-07 certified
 IEC/EN62368-1 certified
 EN55032 compliant
 EN55024 compliant
 CB report

Specifications (measured @ Ta= 25°C, nominal input voltage, full load unless otherwise specified)

BASIC CHARACTERISTICS


Parameter	Condition	Min.	Typ.	Max.
Internal Input Filter				capacitor
Input Voltage Range			±10.0%	
Input Current	nom. Vin = 5VDC nom. Vin= 12VDC nom. Vin = 24VDC		500mA 200mA 100mA	
Quiescent Current	nom. Vin = 5VDC nom Vin= 12VDC nom. Vin = 24VDC		40mA 30mA 15mA	
Minimum Load		0%		
Internal Operating Frequency		20kHz		
Output Ripple and Noise ⁽⁵⁾	20MHz BW			150mVp-p

Notes:


Note5: Measurements are made with a 0.1µF MLCC across output. (low ESR)

Efficiency vs. Load


R2SX-053.3S(H)

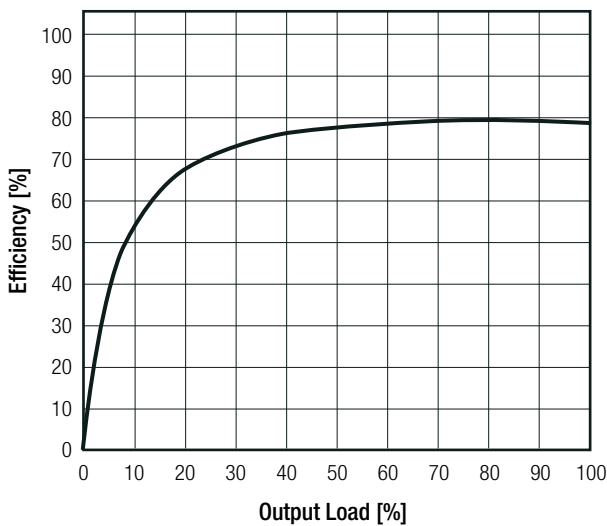


R2SX-0505S(H)

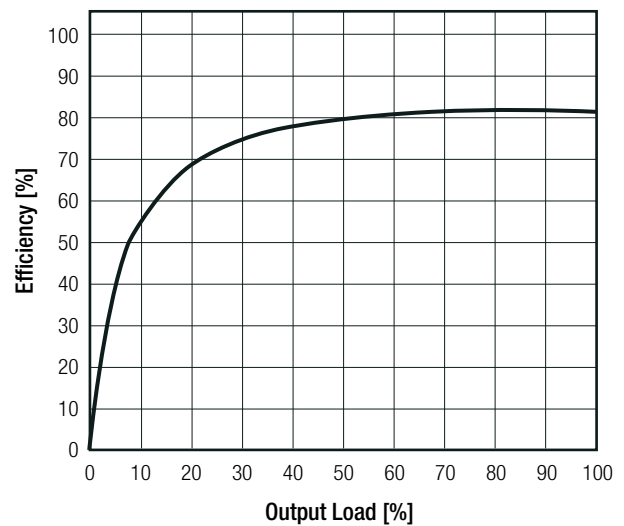

R2SX-2405S(H)

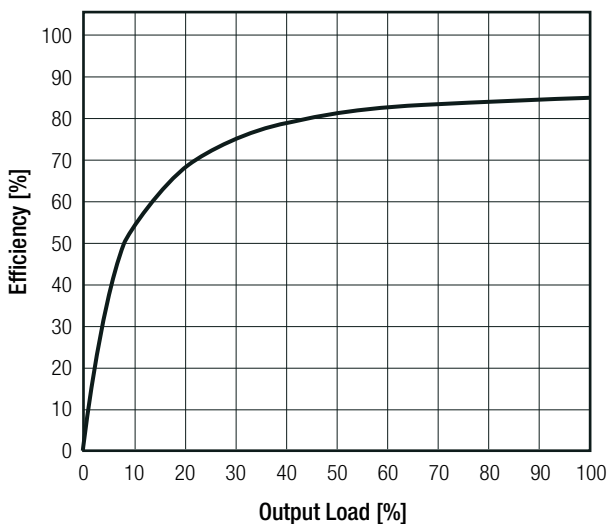

R2SX-2424S(H)

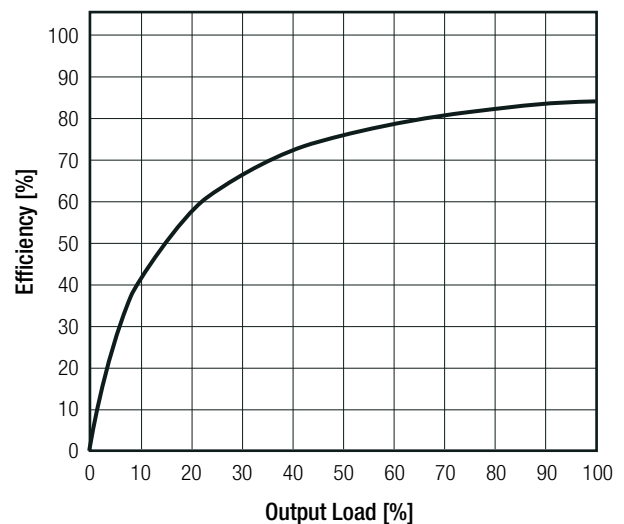

Specifications (measured @ Ta= 25°C, nominal input voltage, full load unless otherwise specified)




REGULATIONS

Parameter	Condition		Value
Output Accuracy			±5.0% max.
Line Regulation	low line to high line		±1.2% typ. at 1.0% of Vin typ.
Load Regulation ⁽⁶⁾	10% to 100% load	3.3Vout, 5Vout	15.0% max.
		12Vout, 15Vout, 24Vout	10.0% max.

Notes:

Note6: Operation below 10% load will not harm the converter, but specifications may not be met

Tolerance Envelope

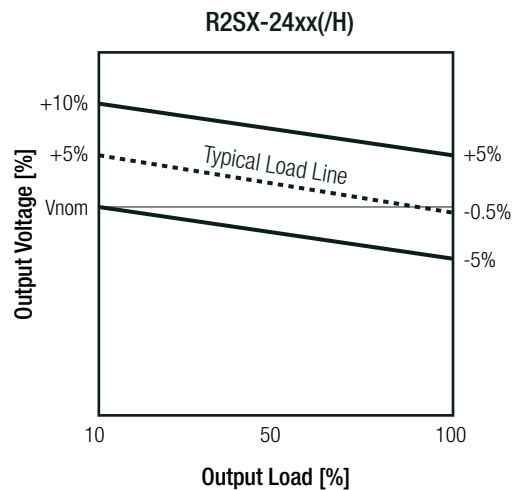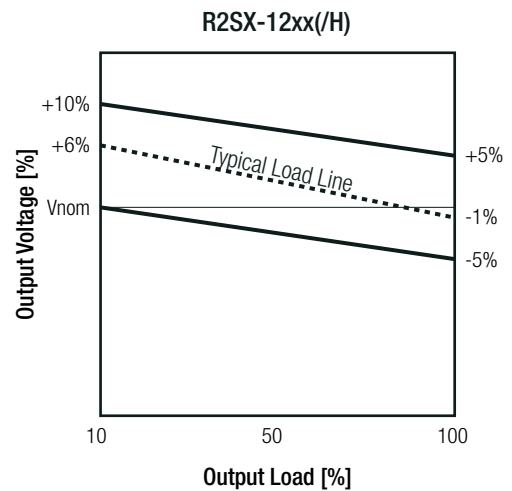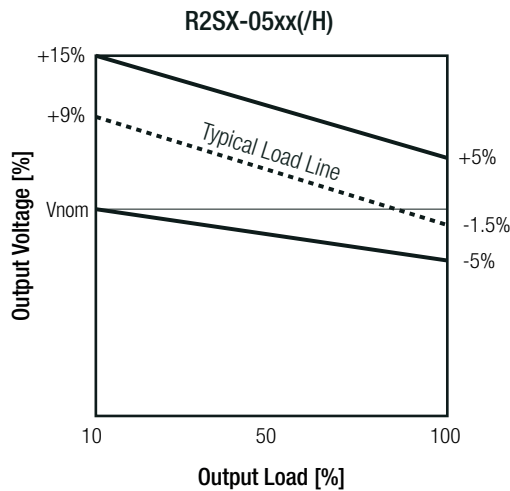

PROTECTIONS

Parameter	Type			Value
Isolation Voltage	I/P to O/P	standard	tested for 1 second rated for 1 minute ⁽⁷⁾	1kVDC 500VAC
	I/P to O/P	with suffix "/H"	tested for 1 second rated for 1 minute ⁽⁷⁾	3kVDC 1.5kVAC
Isolation Resistance				10GΩ min.
Isolation Capacitance				100pF max.
Insulation Grade				functional

Notes:

Note7: For repeat Hi-Pot testing, reduce the time and/or the test voltage


Note8: Refer to local safety regulations if input over-current protection is also required. Recommended fuse: slow blow type

Specifications (measured @ Ta= 25°C, nominal input voltage, full load unless otherwise specified)

ENVIRONMENTAL

Parameter	Condition		Value
Operating Temperature Range	@ natural convection and full load (refer to "Derating Graph")		-40°C to +75°C
Operating Altitude			5000m
Operating Humidity	non-condensing		5% - 95% RH max.
Pollution Degree			PD2
Vibration			according to MIL-STD-202G
MTBF	according to MIL-HDBK-217F, G.B.	+25°C +75°C	12100 x 10 ³ hours 4400 x 10 ³ hours

Derating Graph
(@ Chamber)

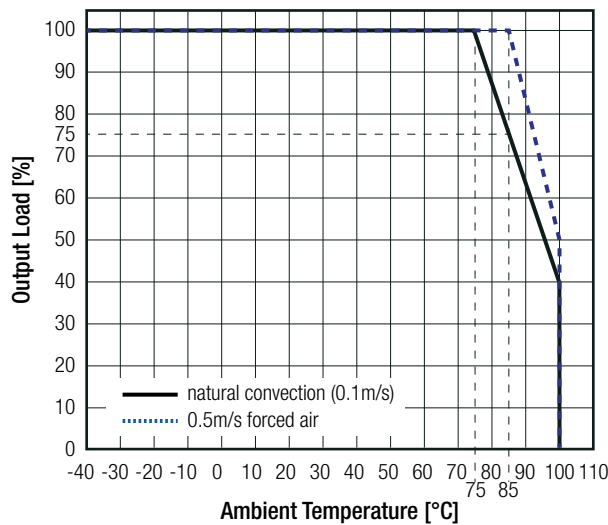

SAFETY AND CERTIFICATIONS


Certificate Type (Safety)	Report / File Number	Standard
Audio/video, information and communication technology equipment - Safety requirements	E224736	UL62368-1, 2nd Edition, 2014 CAN/CSA -C22.2 No. 62368-1-14, 2nd Edition
Information Technology Equipment, General Requirements for Safety		UL60950-1, 2nd Edition, 2014 CAN/CSA-C22.2 No. 60950-1-07, 2nd Edition
Audio/video, information and communication technology equipment - Safety requirements (CB Scheme)	WD-ITAV-190016-A0	IEC62368-1:2014, 2nd Edition
Audio/video, information and communication technology equipment - Safety requirements		EN62368-1:2014 + A11:2017
RoHS2		RoHS 2011/65/EU + AM2015/863

continued on next page

Specifications (measured @ Ta= 25°C, nominal input voltage, full load unless otherwise specified)

EMC Compliance	Condition	Standard / Criterion
Electromagnetic Compatibility of Multimedia Equipment - Emission Requirements	with external filter (see filter suggestion below)	EN55032:2015 + AC:2016, Class B
Information technology equipment - Immunity characteristics - Limits and methods of measurement	WH-CE-E1803002	EN55024:2010 + A1:2015
ESD Electrostatic discharge immunity test	Air: ±2, 4, 6, 8kV Contact: ±2, 4kV	EN61000-4-2:2009, Criteria A
Radiated, radio-frequency, electromagnetic field immunity test	1, 3, 10V/m	EN61000-4-3:2010, Criteria A
Fast Transient and Burst Immunity	DC Power Port: ±0.5, 1, 2kV	EN61000-4-4:2012, Criteria A
Surge Immunity	DC Power Port: ±0.5, 1kV	EN61000-4-5:2017, Criteria B
Immunity to conducted disturbances, induced by radio-frequency fields	10V r.m.s	EN61000-4-6:2014, Criteria A
Power Magnetic Field Immunity	50Hz / 1A/m	EN61000-4-8:2010, Criteria A

EMC Filtering Suggestions for EN55032

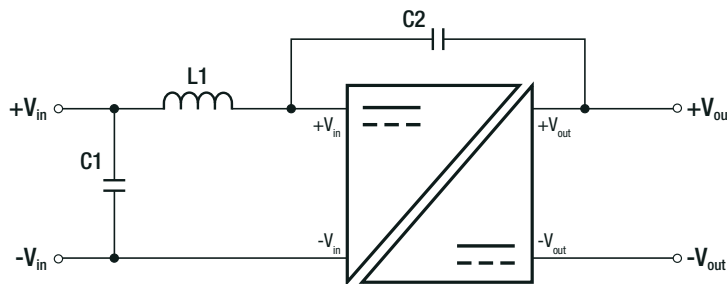

Component List Class B


Model	C1	L1	C2
R2SX-05xx	10µF MLCC	10µH SMD Inductor	470pF/4kVDC
R2SX-12xx	4.7µF MLCC	22µH SMD Inductor	
R2SX-24xx	10µF MLCC	47µH SMD Inductor	

DIMENSION and PHYSICAL CHARACTERISTICS

Parameter	Type	Value
Material	base PCB	black plastic, (UL94V-0) FR4, (UL94V-0)
Package Dimension (LxWxH)		15.24 x 11.1 x 8.0mm
Package Weight		1.6g typ.

continued on next page

Specifications (measured @ Ta= 25°C, nominal input voltage, full load unless otherwise specified)

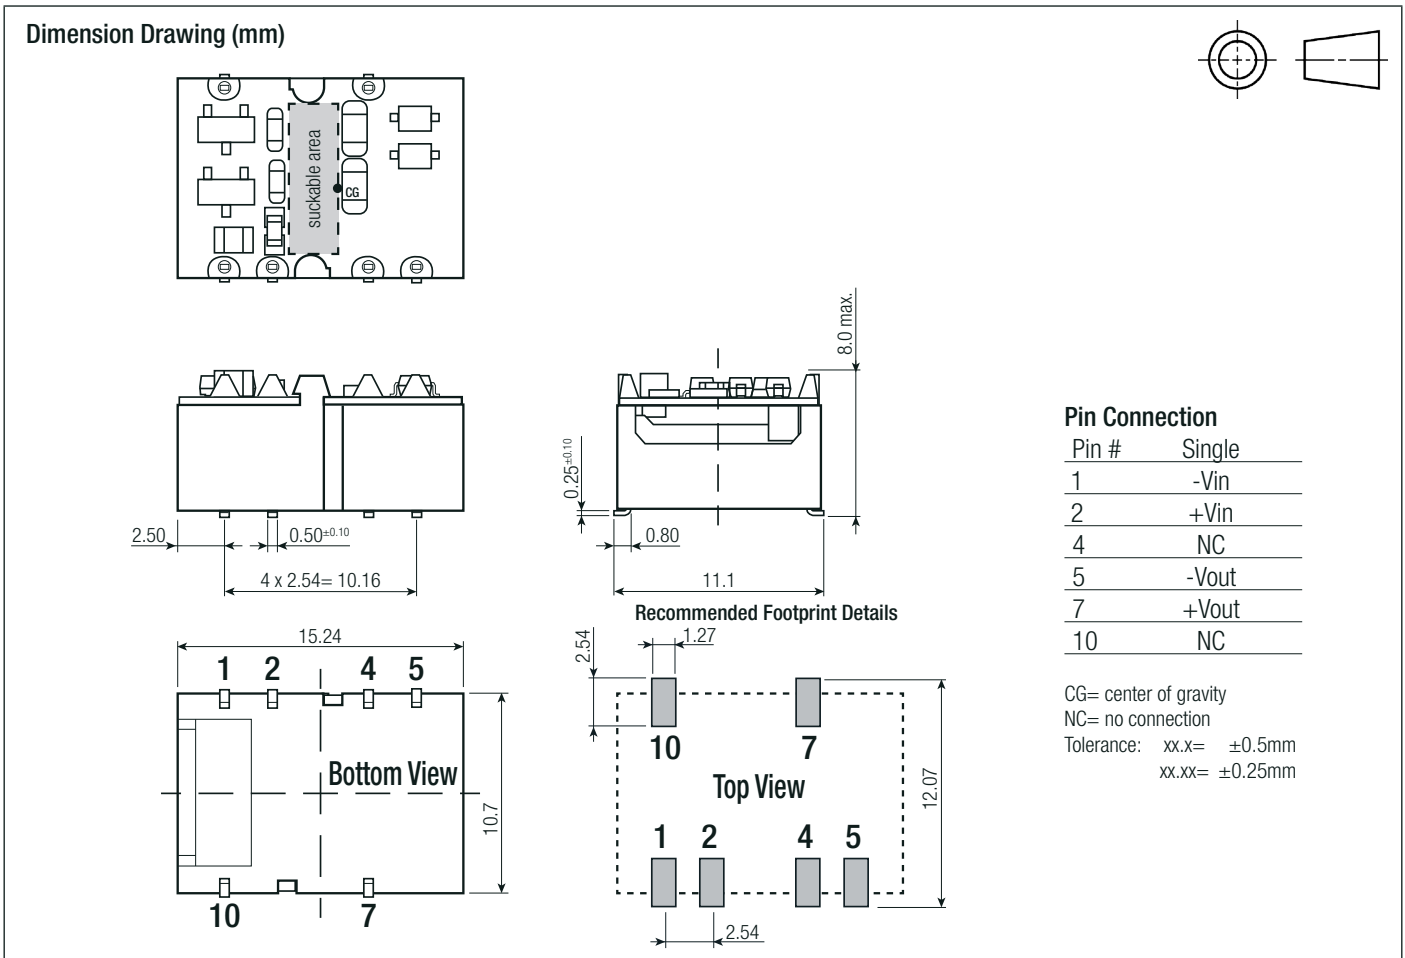

PACKAGING INFORMATION		
Packaging Dimension (LxWxH)	tape and reel (carton)	355.0 x 340.0 x 35.0mm
	reel	330.2 x 330.2 x 30.0mm
	tray	260.0 x 205.0 x 27.0mm
Packaging Quantity	tape and reel	250pcs
	tray	30pcs
Tape Width		24.0mm
Storage Temperature Range	non-condensing	-55°C to +125°C
Storage Humidity		5% - 95% RH max.

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

RECOM:

[R2SX-0505-Tray](#) [R2SX-2405/H-Tray](#) [R2SX-0505/H-Tray](#) [R2SX-2415/H-R](#) [R2SX-2424-R](#) [R2SX-2415-R](#) [R2SX-2424-Tray](#) [R2SX-2405-R](#) [R2SX-053.3/H-Tray](#) [R2SX-2405-Tray](#) [R2SX-2415/H-Tray](#) [R2SX-2405/H-R](#) [R2SX-053.3/H-R](#) [R2SX-0505-R](#) [R2SX-2415-Tray](#) [R2SX-2424/H-R](#) [R2SX-2424/H-Tray](#) [R2SX-053.3-Tray](#) [R2SX-053.3-R](#) [R2SX-0505/H-R](#) [R2SX-1205/H-Tray](#) [R2SX-1205-Tray](#) [R2SX-1205-R](#) [R2SX-1205/H-R](#)