





Fan material: casing of aluminium alloy die casting and


black painted steel aluminium UNI5076 Casing material: No 4 holes Ø5.4 Fixing system: thermally Motor protection:

Rated temperature range: from -20°C to +70°C Motor Lifetime L10 at 25°C da 53,000 a 80,000 h

(approx.):

Weight: 2,800 kg

Electrical connection: by terminal block 3 pins (L-N-PE)

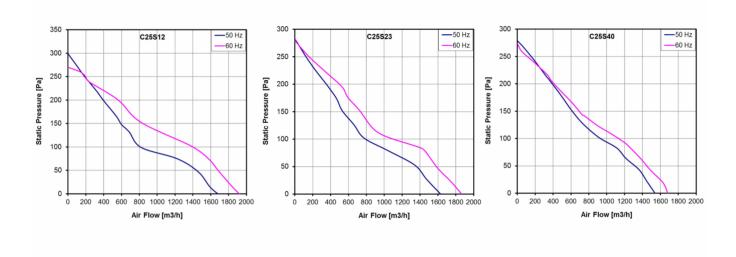

Model	Bearing	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Noise	RPM	Approvals
		(V)	(Hz)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
C25S12HKBE00	Ball	115 V a.c.	50/60	1.1/0.6	107/138	1,680/1,920	299/270	64.6/67.4	2,730/3,170	CE
C25S23HKBE00	Ball	230 V a.c.	50/60	0.50/0.28	101/127	1,630/1,865	280/280	67.0/70.0	2,735/3,150	CE
C25S40HKBE00	Ball	400 V 3 ~	50/60	0.19/0.21	86/117	1,540/1,680	280/275	67.0/69.0	2,635/2,840	CE

All specifications, data and drawing are subject to change without notice and are approximate. Please refer to our terms of sales including our warranty and limited liabilities clauses.

www.Fandis.it es_c25se