
PRODUCT DATASHEET REV 5



Adhesive Standoffs (SA)

Adhesive standoffs to securely attach PCBs to flat surfaces.

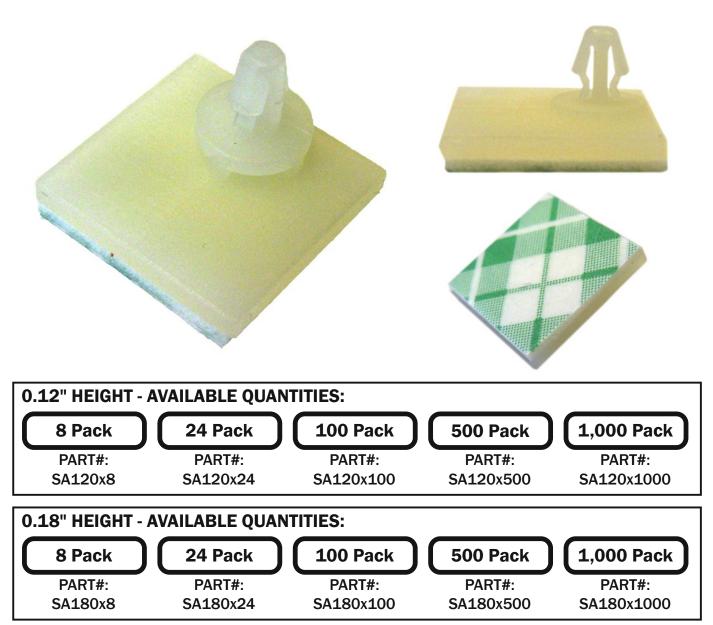

Adhesive Standoff Features:

- Low profile 0.12 or 0.18" standoff height.
- 0.6x0.6" square offset base allows use when holes are close to the PCB edge.
- Integrated clip locks PCBs with 0.125" diameter holes in place.
- Material: Nylon 66(UI), Flame Class: 94V-2.
- 3M Adhesive Tape Backing.



"Faster ways to build prototypes"

BusBoard Prototype Systems


© 2015 BusBoard Prototype Systems Ltd. "BusBoard". "BPS" and the BPS logo are trademarks of BusBoard Prototype Systems. All rights reserved.

Adhesive Standoff Details:

The SA120 and SA180 are low-profile adhesive standoffs with 0.120" and 0.180" standoff heights, respectively. It securely attaches your PCB to a flat surface The post inserts into a 0.125" mounting hole. The post includes a locking tab that secures the PCB when inserted. It can be used with 1/16" or 1/32" thick PCBs.

The 0.6 x 0.6" square base is offset to allow the base to be underneath the board when the mounting hole is close the to PCB edge. The offset base provides a large sticking surface while permitting the PCB to be mounted in tight spaces or close to walls. This can be useful when working with small enclosures.

High-quality 3M brand double-sided tape secures the standoff to a flat surface.

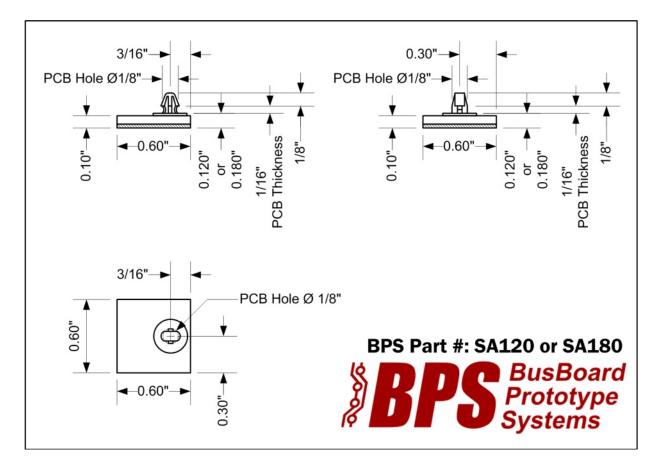

Related Products:



BusBoard Prototype Systems www.BusBoard.com

© 2015 BusBoard Prototype Systems Ltd. "BusBoard". "BPS" and the BPS logo are trademarks of BusBoard Prototype Systems. All rights reserved.

"Faster ways to build prototypes"