


# Slide Potentiometer

## Model PSxxG

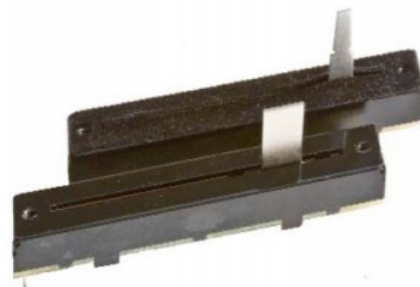

### Features:

- With/without dust cover
- Stable sliding force
- 200,000 cycle life
- Metal lever
- RoHS compliant

## Model Styles Available

Dual Gang , 45mm Travel	PS45G
Dual Gang , 60mm Travel	PS60G

## Electrical

Resistance Range, Ohms	10K -1M
Standard Resistance Tolerance	± 20%
Resistance Tapers	A,B,C
Residual Resistance	Less than 1.0 ohms
Input Voltage, Maximum	300Vdc
Power rating, Watts	<b>Linear B taper:</b> 0.25W <b>Other tapers:</b> 0.125W
Dielectric Strength	300Vac, 1 minute
Insulation Resistance, Minimum	10M ohms at 250Vdc/ 1 minute
Sliding Noise	Less than 100mV
Gang Error	±3dB (-40dB to 0dB)

## Mechanical

Static Stop Strength, Minimum	5.0 Kgf/cm
Operating Force	50gf max.

## Durability

Sliding Life	200,000 cycles
--------------	----------------


General Note  
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT electronics plc

TT Electronics | BI Technologies  
413 Rood RD, Suite 7  
Calexico, CA 92231  
Ph: +1 714 447 2345  
[www.ttelectronics.com/bi-technologies](http://www.ttelectronics.com/bi-technologies)

Issue B 04/2019 Page 1

### Ordering

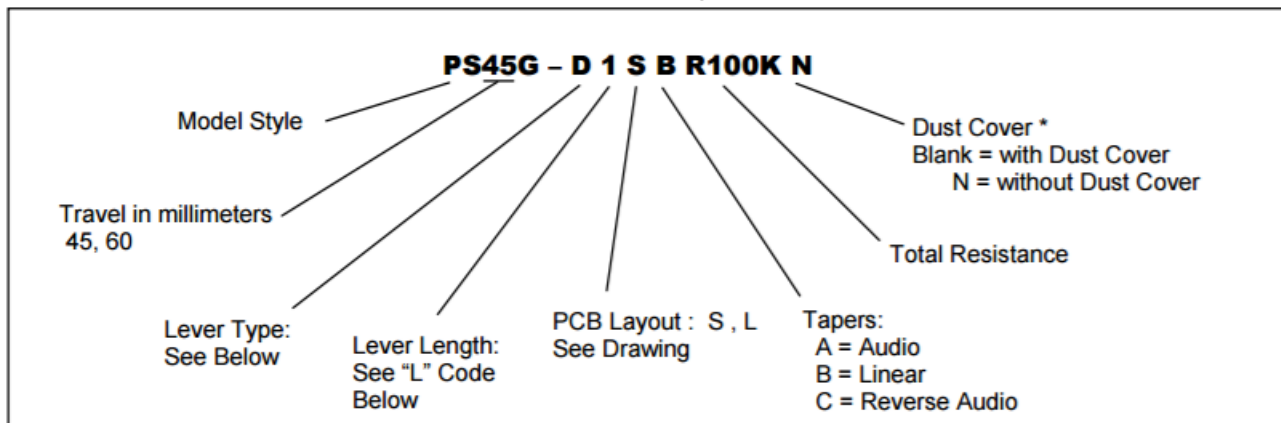

### Standard Resistance Values, ohms

10K	20K	50K	100K	200K	500K	1 MEG
-----	-----	-----	------	------	------	-------

### Lever Types & Length

D-Type						B-Type					C-Type			A-Type			
L	12.5	15	17	20	25	L	8	12.5	13	20	F	10	M	11	12	12	
CODE	1	2	3	4	5	CODE	1	2	3	4	L	15	F	11	10	10	
											CODE	1	L	16	20	25	
													CODE	1	2	3	

**\* Dust Cover option not offered for levers less than 10 mm in length**


#### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


### Outline Drawings

#### PS45G with L type PCB LAYOUT

##### With Dust Cover

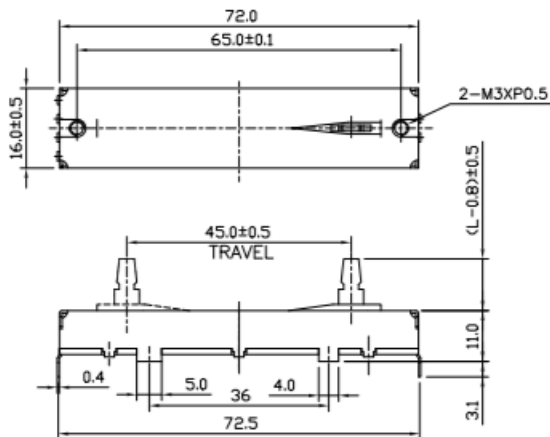


##### Without Dust Cover

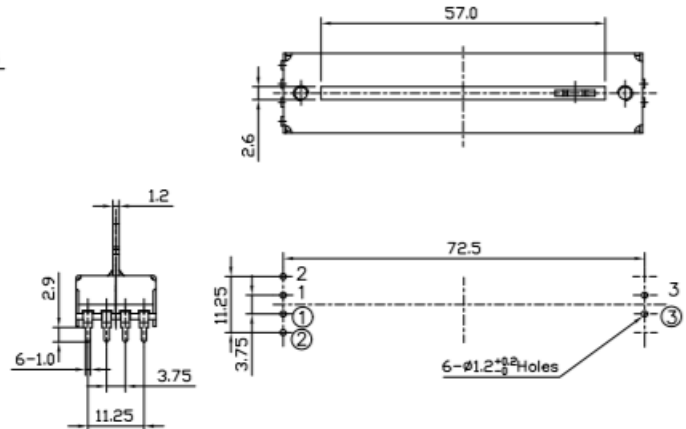


#### PS45G with S type PCS LAYOUT

##### With Dust Cover

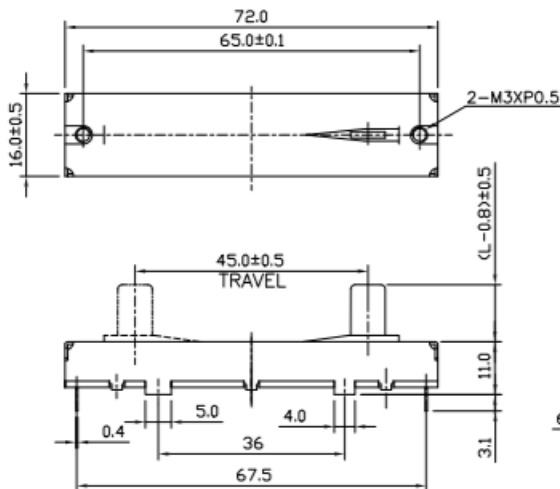

##### Without Dust Cover

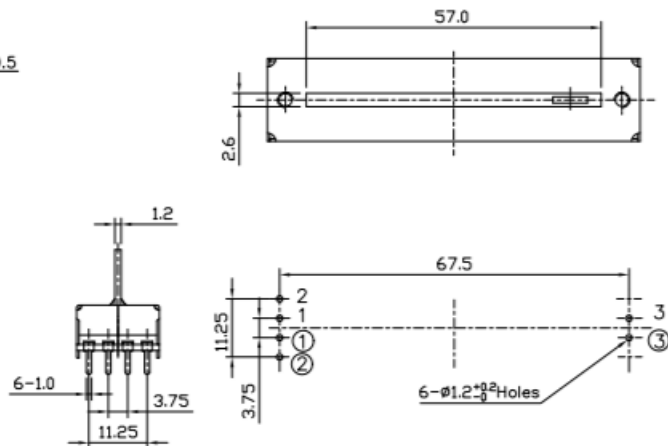


General Note  
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT electronics plc


TT Electronics | BI Technologies  
 413 Rood RD, Suite 7  
 Calexico, CA 92231  
 Ph: +1 714 447 2345  
[www.ttelectronics.com/bi-technologies](http://www.ttelectronics.com/bi-technologies)

### Outline Drawings


#### PS60G with L type PCB LAYOUT

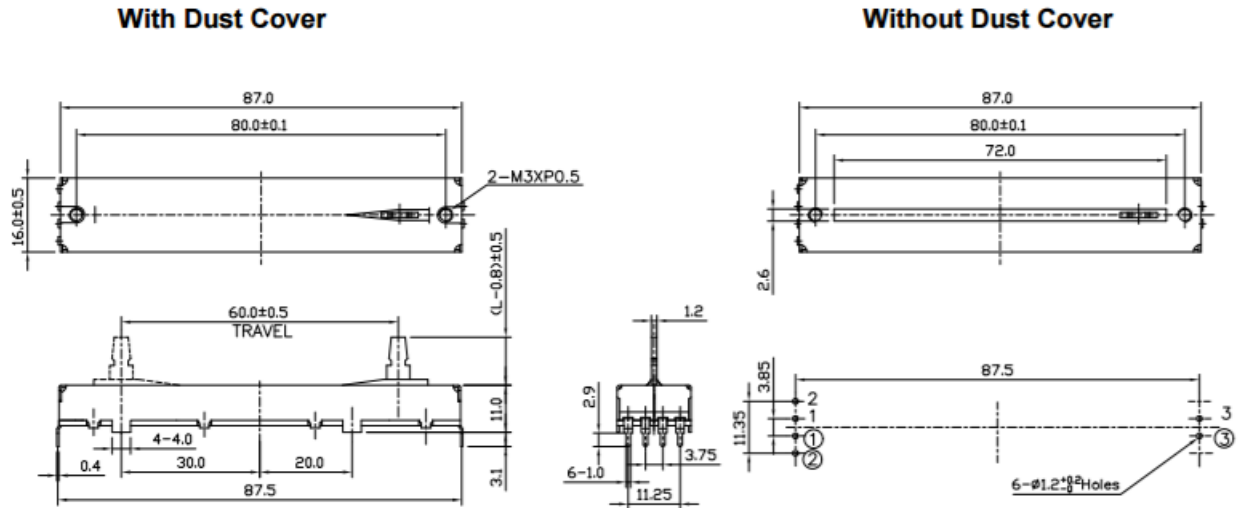

#### PS60G with S type PCB LAYOUT

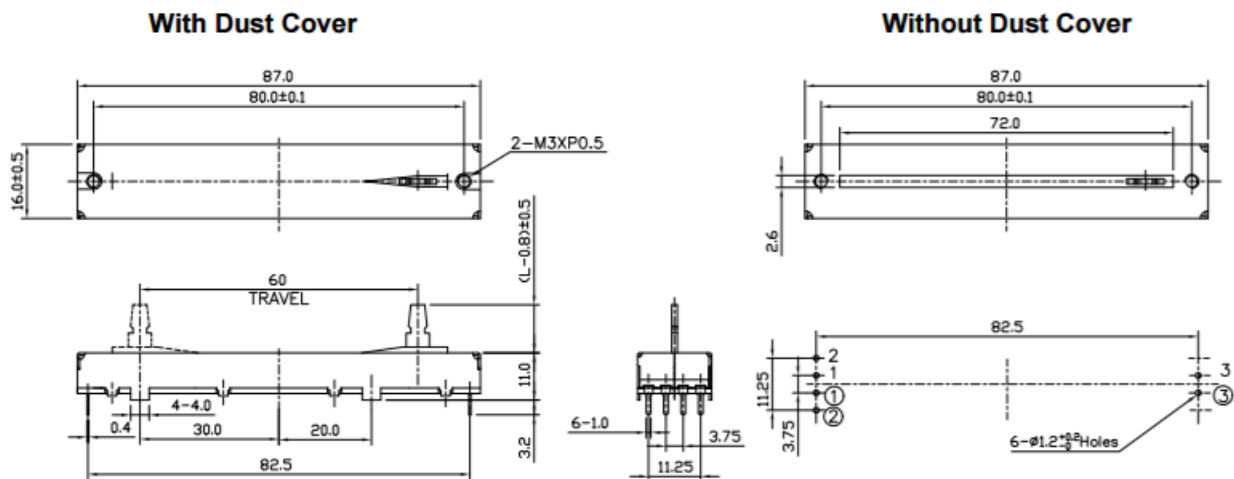

### Circuit Diagram PSxxG Dual Gang



General Note  
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | BI Technologies  
413 Rood RD, Suite 7  
Calexico, CA 92231  
Ph: +1 714 447 2345  
www.ttelectronics.com/bi-technologies

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## TT Electronics:

[PS45G-D15SBR100K](#) [PS45G-C1LBR10KN](#) [PS60G-D4SBR10K](#) [PS45G-C1LBR10K](#) [PS45G-C1SBR10KN](#) [PS60G-B2SBR20K](#) [PS45G-B3SBR20K](#) [PS60G-B3SBR50K](#) [PS60G-B3SBR100K](#) [PS60G-B2SBR100K](#) [PS45G-B2SBR1MEG](#) [PS60G-B3SBR10K](#) [PS60G-B3SBR200K](#) [PS60G-B2SBR10K](#) [PS60G-B2SBR50K](#) [PS60G-B2SBR1MEG](#) [PS45G-B2SBR500K](#) [PS45G-B2SBR50K](#) [PS45G-B3SBR50K](#) [PS60G-B3SBR1MEG](#) [PS45G-B3SBR100K](#) [PS45G-C1SBR20KN](#) [PS45G-B2SBR200K](#) [PS60G-B2SBR200K](#) [PS45G-B2SBR20K](#) [PS45G-B2SBR10K](#) [PS60G-B3SBR500K](#) [PS60G-B2SBR500K](#) [PS45G-C1BR20KN](#) [PS45G-B3SBR500K](#) [PS45G-B3SBR200K](#) [PS60G-B1SAR50KN](#) [PS45G-D2SBR100K](#)