

6.21.17

CHANGE AS PER ECN 17-044

8.08.05

12.16.09 7.16.08

CHANGE AS PER ECN 09-188 CHANGE AS PER ECN 15-149

> \Box \cap

CHANGE AS PER ECN08-129

CHANGE AS PER ECN 05-032


 ϖ \triangleright

12.28.15

8.13.99 CHANGE AS PER ECN 99-057

DESCRIPTION

REV.

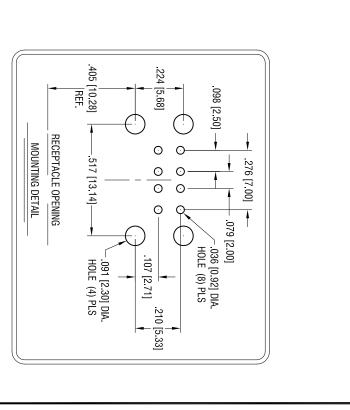

Notes:

Shell: Mat'l: Steel,

Finish: Nickel plate, over Copper

Insulator: Mat'l- Glass Filled LCP Contacts: Matl: Copper Alloy

Finish: Contact Area -Gold Plate over Nickel Plate Solder Tail - Tin Plate over Nickel Plate

> **Electrical Specifications** Rated Voltage: 30V AC (rms)

Contact Current Rating: 1A Max.

Dielectric Withstanding: 750V AC Contact Resistance: 30 milliohms Max

Operating Temperature: -55°C to 85°C

ACTUAL SIZE

KEYSTONE ELECTRONICS CORP.

PART NAME www.keyelco.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900

USB A-TYPE DUAL-HORIZONTAL SOCKET

	MATERIAL		
	AS	AS NOTED	
	FINISH	DRN BY NT	DATE 6 18 98
ACTUAL SIZE	AU NOTED	APP'D LN	SCALE 2X
THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND	,	CODE DWG NO.	
SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.	DECIMAL ± .010 [± 0.25] ANGULAR ± 1° UNLESS OTHERWISE SPECIFIED	0	922

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Keystone Electronics:

922