



REVISIONS		REVISION DATE	APPR
SYM	DESCRIPTION		

FULL SECTION

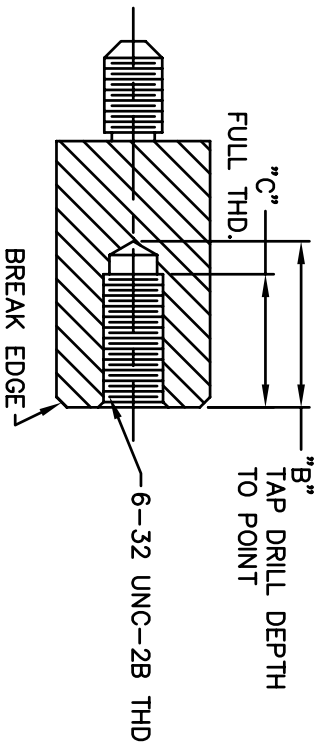

6-32 UNC-2A THD.  
RELIEF TO ROOT  
DIA. OF THD.

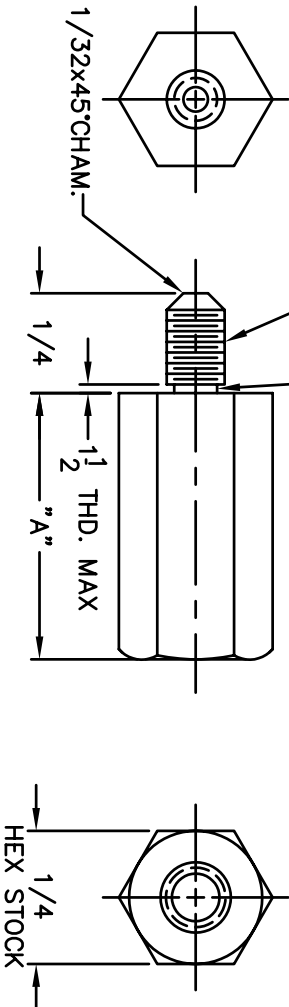

PART NO.	LENGTH "A" ±.005	STANDOFF		
		DRILL DEPTH "B"	TAP DEPTH DIM	TAP DEPTH "C" NO. THDS
8001C	.250	.211	.104	3-4
8001E	.375	.336	.229	7-8
8001G	.500	.482	.350	10-11
8001J	.625	.482	.350	10-11
8001L	.750	.482	.350	10-11
8001N	.875	.482	.350	10-11
8001Q	1.000	.482	.350	10-11
8001R	1.125	.482	.350	10-11
8001S	1.250	.482	.350	10-11
8001T	1.375	.482	.350	10-11
8001U	1.500	.482	.350	10-11
8001V	1.625	.482	.350	10-11
8001W	1.750	.482	.350	10-11
8001Y	2.000	.482	.350	10-11
8001ZB	2.500	.482	.350	10-11
8001ZD	3.000	.482	.350	10-11

MATERIAL: ALUMINUM ALLOY 2011 T-3		FINISH: IRRIDITE 14-2 PER MIL-C-5541	
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED		TITLE: 8001C-8001ZD	
XX	XXX	ALUMINUM HEX MALE/FEMALE STANDOFF	
---	---	Electronic Connectors and Hardware 632 Arch Street, Meadville, Pa. 16335	
FRAGMENTS	ANGLES	SCALE	4X
HEAT TREAT:	---	DRAWN:	T. LORD
DATE:	12/6/03	CHECKED:	T. LORD
DATE:	12/6/03	APPROVED:	T. LORD
DATE:	12/6/03	DATE:	12/6/03
PLOT SCALE:	1=1	SIZE:	B
DRAWING NUMBER		SD 8001C-8001ZD	
ISSUE		E	

**ABBATRON**