

DC Fan

# 80×80×25 mm

San Cooler 80 9A type   



## General Specifications

- Material ..... Frame: Plastic (Flammability: UL 94V-0), Impeller: Plastic (Flammability: UL 94V-0)
- Expected life ..... See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage)  
Expected life at 40°C is for reference only.
- Motor protection function ..... Locked rotor burnout protection, Reverse polarity protection  
For details, please refer to p. 599.
- Dielectric strength ..... 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- Insulation resistance ..... 10 MΩ or more with a 500 VDC megger (between lead wire conductors and frame)
- Sound pressure level (SPL) ..... At 1 m away from the air inlet
- Storage temperature ..... -30 to +70°C (Non-condensing)
- Lead wire ..... ⊕Red ⊖Black or Blue Sensor Yellow
- Mass ..... 90 g

## Specifications

The models listed below **have ribs and pulse sensors**. For models without ribs, append "1" to the end of model numbers.

Model no.	Rated voltage [V]	Operating voltage range [V]	Rated current [A]	Rated input [W]	Rated speed [min <sup>-1</sup> ]	Max. airflow [m <sup>3</sup> /min] [CFM]	Max. static pressure [Pa] [inchH <sub>2</sub> O]	SPL [dB (A)]	Operating temperature [°C]	Expected life [h]		
➤ 9A0812G401	12	6 to 13.2	0.38	4.56	4500	1.5 53.0	80.3 0.323	40	-20 to +60	30000/60°C (53000/40°C)		
➤ 9A0812S401			0.18	2.16	3400	1.2 42.4	48 0.193	34				
➤ 9A0812H401		6 to 13.8	0.13	1.56	2900	1.03 36.4	35.3 0.142	29			-20 to +70	40000/60°C (70000/40°C)
➤ 9A0812F401			0.11	1.32	2600	0.92 32.5	28.4 0.114	26				
➤ 9A0812M401			0.09	1.08	2350	0.83 29.3	22.5 0.09	23				
➤ 9A0812L401			0.06	0.72	1850	0.65 23.0	14.7 0.059	20				
➤ 9A0824G401	24	12 to 26.4	0.21	5.04	4500	1.5 53.0	80.3 0.323	40	-20 to +60	30000/60°C (53000/40°C)		
➤ 9A0824S401		12 to 27.6	0.1	2.4	3400	1.2 42.4	48 0.193	34			-20 to +70	40000/60°C (70000/40°C)
➤ 9A0824H401			0.07	1.68	2900	1.03 36.4	35.3 0.142	29				
➤ 9A0824F401			0.06	1.44	2600	0.92 32.5	28.4 0.114	26				
➤ 9A0824M401			0.05	1.2	2350	0.83 29.3	22.5 0.09	23				
➤ 9A0824L401		14 to 27.6	0.04	0.96	1850	0.65 23.0	14.7 0.059	20				


Note 1: Sensor and control options are available for selection. Refer to the table on p. 624.

Note 2: The ➤ mark indicates Short LeadTime Service applicable models. See p. 654 for details.

## Airflow - Static Pressure Characteristics


**9A0812G401** With pulse sensor

Operating voltage range

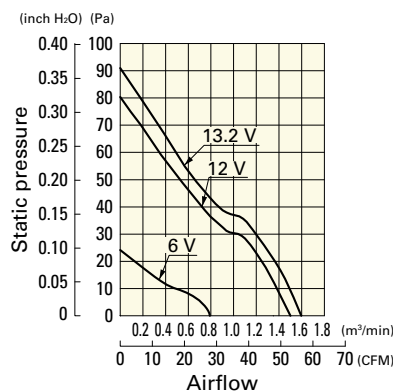


**9A0812S401** With pulse sensor

Operating voltage range

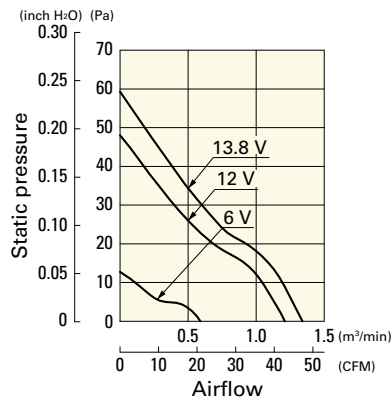

**9A0812H401** With pulse sensor


Operating voltage range

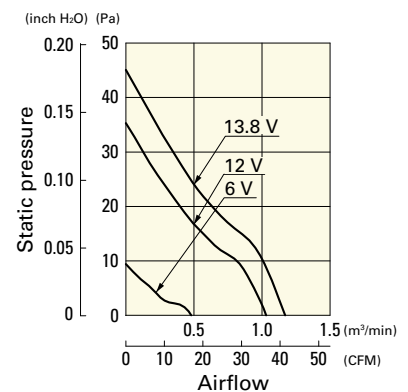

**Airflow - Static Pressure Characteristics**


**9A0812F401** With pulse sensor

Operating voltage range

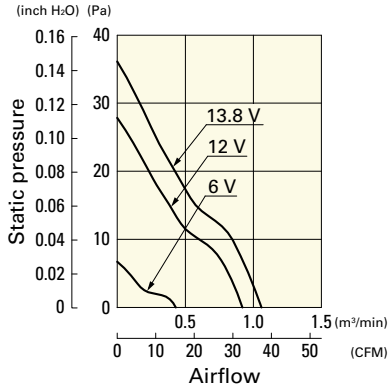


**9A0812M401** With pulse sensor

Operating voltage range

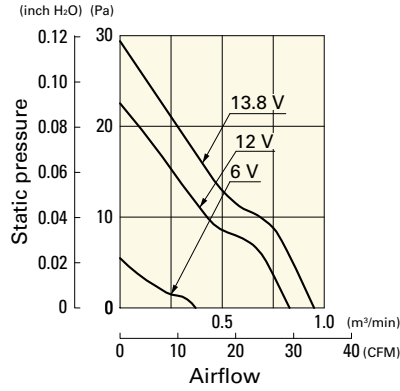


**9A0812L401** With pulse sensor

Operating voltage range

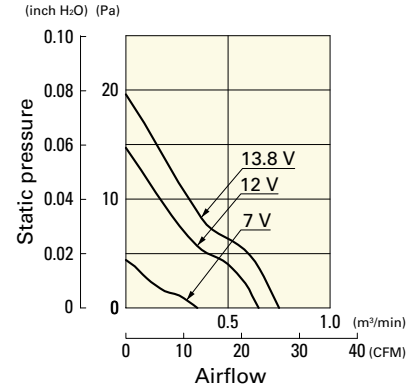


**9A0824G401** With pulse sensor

Operating voltage range

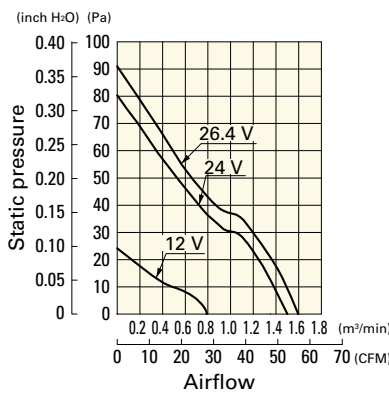


**9A0824S401** With pulse sensor

Operating voltage range

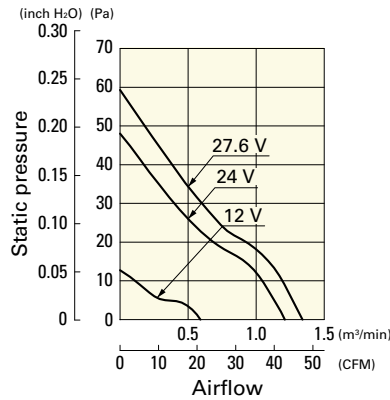


**9A0824H401** With pulse sensor

Operating voltage range

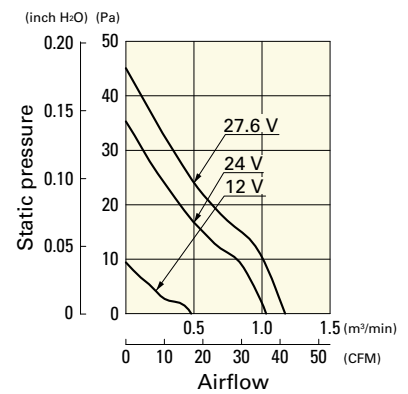


**9A0824F401** With pulse sensor

Operating voltage range

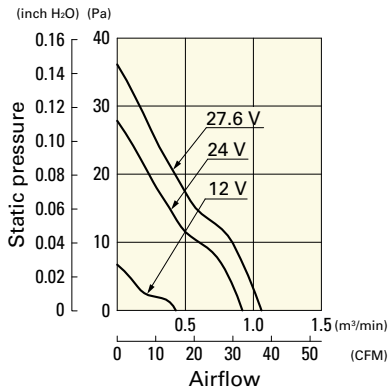


**9A0824M401** With pulse sensor

Operating voltage range

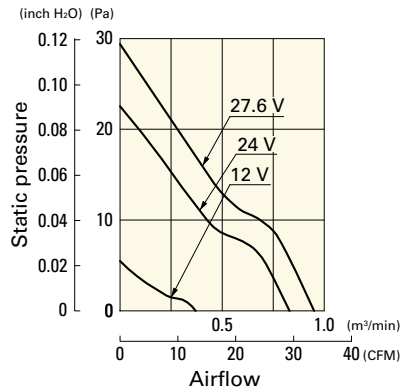


**9A0824L401** With pulse sensor


Operating voltage range

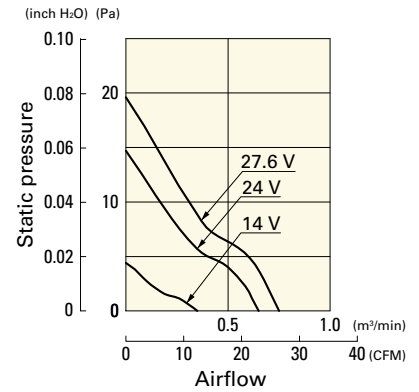

**Dimensions (unit: mm) (With ribs)**

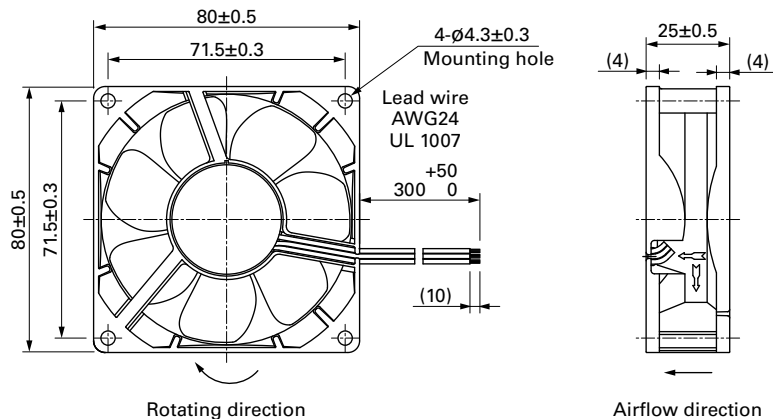

Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

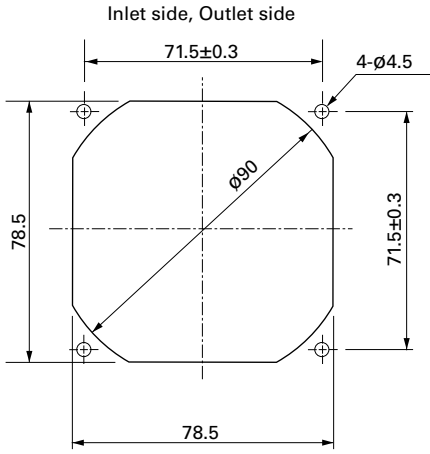

Options

Finger guards

page: p. 584

Model no.: 109-049E, 109-049H, 109-049C

Resin finger guards

page: p. 591

Model no.: 109-1002G

Resin filter kits

page: p. 592

Model no.: 109-1002F13 (13PPI), 109-1002F20 (20PPI),  
109-1002F30 (30PPI), 109-1002F40 (40PPI)