

ABC225 Series

Low Profile

Open Frame Power Supplies

The ABC225 Series of open frame power supplies feature a wide universal AC input range of 90 – 264 VAC, offering up to 225 W of output power in a compact 4 x 2 x 1 inch footprint, with a variety of isolated single output voltages.

The high efficiency and high power density of the ABC family ensures minimal power loss in end-use equipment, thereby facilitating higher reliability, easier thermal management and meets regulatory approvals for environmentally-friendly end products.

These power supplies are ideal for telecom, datacom, industrial equipment and other applications.



Key Features & Benefits

- 2 x 4 x 1 Inch Form Factor
- 225 W with Forced Air Cooling & 130 W with Convection Cooling
- Efficiencies up to 94%
- No Load Power < 0.5 W
- -40 to 70°C Operating Temperature
- 12 V / 0.5 A Fan Output, Thermal Shut-Down Feature
- 3.37 Million Hours, Telcordia -SR332-Issue 3 MTBF
- IEC/EN/UL 62368-1 Certified
- CCC (China Compulsory Certification approval)
- Approved with metal enclosures/accessories
- RoHS Compliant

Applications

- Instrumentation
- Lighting
- Industrial Applications
- Applied Computing
- Renewable Energy
- Test and Measurement
- Robotics
- Wireless Communication



bel POWER
SOLUTIONS &
PROTECTION

a bel group

belfuse.com/power-solutions

1. MODEL SELECTION

MODEL NUMBER ¹	DESCRIPTION	VOLTAGE	MAX. LOAD			POWER
			CONVECTION 50°C (112.5 W)	CONVECTION 40°C (120 W)	13 CFM (225 W)	
ABC225-1T12L	Screw Terminal	12 V	9.37 A	10.00 A	18.75 A	225 W
ABC225-1012L	Molex Connector					
ABC225-1T15L	Screw Terminal	15 V	7.50 A	8.00 A	15.00 A	225 W
ABC225-1015L	Molex Connector					
ABC225-1T24L	Screw Terminal	24 V	4.68 A	5.00 A	9.37 A	225 W
ABC225-1024L	Molex Connector					
ABC225-1T30L	Screw Terminal	30 V	3.75 A	4.00 A	7.50 A	225 W
ABC225-1030L	Molex Connector					
ABC225-1T48L	Screw Terminal	48 V	2.34 A	2.50 A	4.68 A	225 W
ABC225-1048L	Molex Connector					
ABC225-1T58L	Screw Terminal	58 V	1.94 A	2.07 A	3.88 A	225 W
ABC225-1058L	Molex Connector					
COVER-225-XBC ²	Metal cover kit (accessory)					

¹ Class II version available. Add suffix "-2" at the end of the Model Number

² When used in Cover Kit, de-rate output power to 70 % under all operating conditions.

2. INPUT SPECIFICATIONS

Specifications are for nominal input voltage, 25°C unless otherwise stated.

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Input Voltage	Universal (Derate from 100% at 100 VAC to 90% at 85 VAC)	85 – 264 VAC / 390 VDC
Input Frequency		47 – 63 Hz
Input Current	115 VAC: 230 VAC:	2.2 A max. 1.1 A max.
No Load Power	Typical	< 0.5 W
Inrush Current	115 VAC: 230 VAC: 264 VAC:	25 A 45 A 75 A
Leakage Current	Typical (N/A for Class II Option) Touch current:	300 µA < 100 µA
Power Factor	With Full Load	> 0.95
Switching Frequency	PFC: PWM:	70 – 130 kHz 50 – 80 kHz

3. OUTPUT SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Output Voltage	Refer to Model selection table	From 12 V to 58 V
Output Power ³	With 13 CFM: Convection:	225 W Up to 120 W
Efficiency	48 V: 24 V, 30 V: 12 V, 15 V:	94% 93% 92%
Hold-up Time	225 W: 110 W:	10 ms 16 ms
Line Regulation ⁵		± 0.5%
Load Regulation ⁵		± 0.5%
Minimum Load		0.0 A
Transient Response	25% step load change, at 0.1A/μs slew rate, 50% duty cycle, 50 Hz = 4%	Recovery time < 5 ms
Ripple ^{4,5}	For all outputs	1.0 % max
Rise Time	Typical	55 ms
Set Point Tolerance ⁵		± 1%
Output Voltage Adjustment ⁶		± 3%
Over Current Protection		>110%
Over Voltage Protection		110 to 140%
Short Circuit Protection	Hiccup mode	
Cooling	With 13 CFM forced air cooling (100 to 264 VAC) ⁷ With natural convection cooling (100 to 264 VAC) ⁸	225 W Up to 120 W ⁹

³ Combined output power of main output, fan supply shall not exceed max. power rating.

⁴ Ripple is peak to peak with 20 MHz bandwidth and 10 μF (Electrolytic capacitor) in parallel with a 0.1 μF capacitor at rated line voltage and load ranges.

⁵ Fan supply output voltage tolerance including set point accuracy, line and load regulation is +/-15 % and ripple and noise is less than 10 %. With V1 fully loaded, Vfan need to have min load of 20 mA to be within regulation band.

⁶ Adjustment potentiometer is located on the SMT side of the PCB

⁷ Refer to Mechanical Drawing

⁸ Refer to Derating Curve

⁹ For improved thermal performance of ABC225 up to 130 W convection cooling, enquire with Sales Rep prior to placing an order.

4. EMC SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Conducted Emissions	EN 55032-B, CISPR22-B, FCC PART15-B	Pass
Radiated Emissions	EN 55032 A; With external core (King core K5B RC 25x12x15-M in input cable)	Pass Level B
Input Current Harmonics	EN 61000-3-2	Class D
Voltage Fluctuation and Flicker	EN 61000-3-3	Pass
ESD Immunity	EN 61000-4-2	Level 3, Criterion A
Radiated Field Immunity	EN 61000-4-3	Level 3, Criterion A
Electrical Fast Transient Immunity	EN 61000-4-4	Level 3, Criterion A
Surge Immunity	EN 61000-4-5	Level 3, Criterion A
Conducted Immunity	EN 61000-4-6	Level 3, Criterion A
Magnetic Field Immunity	EN 61000-4-8	Level 3, Criterion A
Voltage Dips, Interruptions	EN 61000-4-11	Criterion A & B



Asia-Pacific
+86 755 298 85888

Europe, Middle East
+353 61 225 977

North America
+1 408 785 5200


5. SAFETY SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Isolation Voltage	Input to Output: (for ITE application) Input to GND: (N/A for Class II Option)	3000 VAC 1500 VAC
Safety Standard(s)	IEC 62368-1:2018, IEC 60950-1(ed.2);am1;am2, EN 60950-1:2006;A11;A1;A12;A2, UL 62368-1 and CAN/CSA C22.2 No. 62368-1:19, UL 60950-1 and CAN/CSA C22.2 No. 60950-1-07, GB4943.1-2011;GB9254-2008;GB17625.1-2012	
Agency Approvals	Nemko, UL, C-UL, CCC	
CE mark	Complies with LVD Directive	

6. ENVIRONMENTAL SPECIFICATIONS


PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Operating Temperature	-40 to 0°C startup guaranteed, with spec deviation ¹⁰	-40 to +70°C
Storage Temperature		-40 to +85°C
Relative Humidity	Non-condensing	5% to 95%
Altitude	Operating: Non-operating:	16,000 ft. 40,000 ft.
Reliability	MTBF according to Telcordia -SR332-Issue 3:	3.37 million hours

¹⁰ Output ripple can be more than 10% of the output voltage.

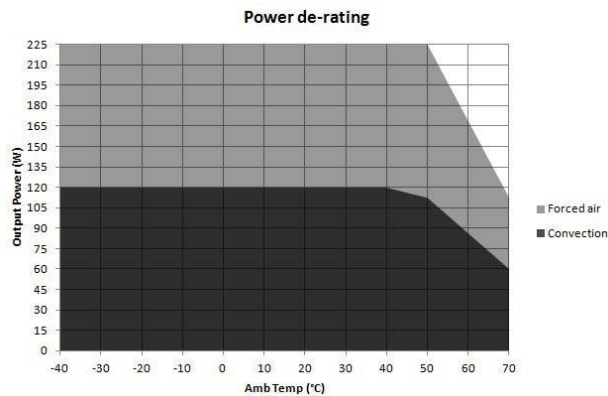

Convection load: 120 W up to 40 °C
De-rate between 40-50 °C @ 0.625% per °C
De-rate above 50 °C @ 2.33% per °C

Forced air cooled load: 225 W up to 50°C
De-rate above 50 °C @ 2.5% per °C

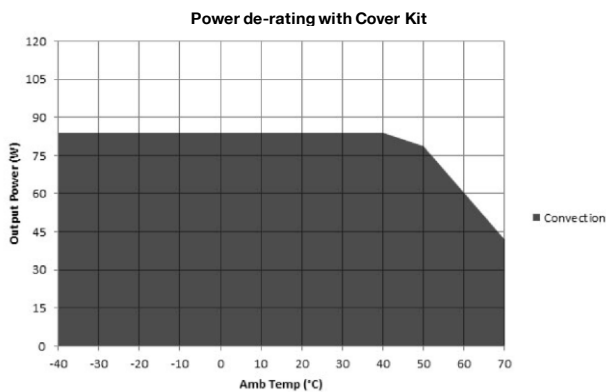

Convection load: 84 W up to 40 °C
De-rate between 40-50 °C @ 0.625% per °C
De-rate above 50 °C @ 2.33% per °C

Figure 1. Derating Curves

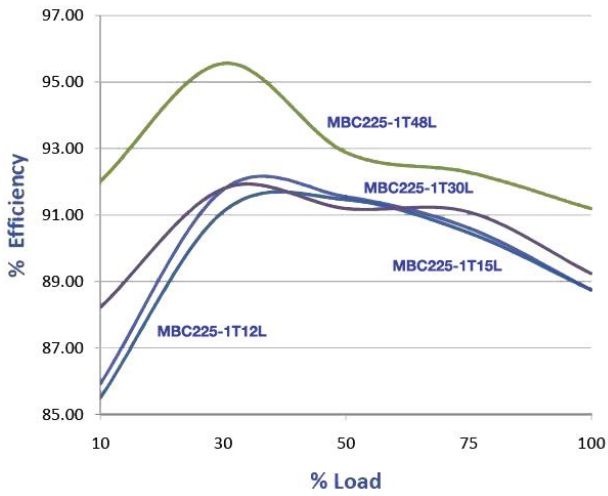


Figure 2. Efficiency Graph at 115 VAC

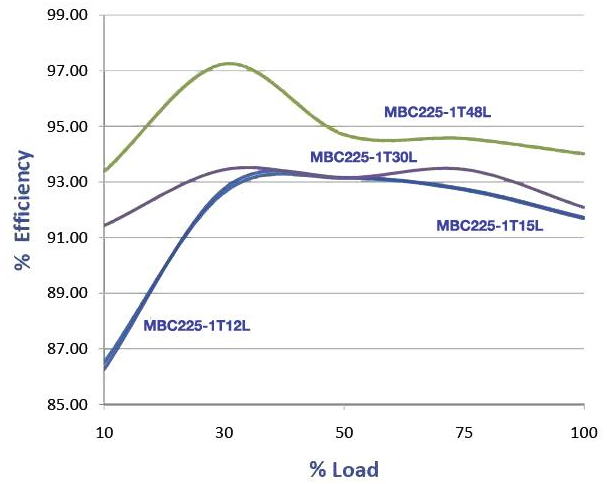


Figure 3. Efficiency Graph at 230 VAC

7. CONNECTOR & PIN DESCRIPTION

CONNECTOR	PIN	DESCRIPTION/CONDITION	MANUFACTURER / PN	
AC Input Connector	J1	Pin 1 AC Line Pin 2 Not Fitted Pin 3 AC Neutral	Molex: 26-60-4030 Mating: 09-50-3031; Pins: 08-50-0106	
DC Output Connector	J2	Pin 1,2,3 V1 +VE Pin 4,5,6 V1 - VE	Screw Terminal (Option 1)	Molex: 39357 Series or equivalent
			Molex Connector (Option 2)	Molex: 26-60-4060 Mating: 09-50-3061; Pins: 08-50-0106
Aux (Fan) Output	J3	Pin 1 FAN +VE Pin 2 FAN - VE	AMP: 640456-2 Mating: 640440-2	

8. MECHANICAL SPECIFICATIONS

PARAMETER	DESCRIPTION/CONDITION
Weight	200 g approx.
Dimensions	50.8 x 101.6 x 25.4 mm (2 x 4 x 1 inch)



Asia-Pacific
+86 755 298 85888

Europe, Middle East
+353 61 225 977

North America
+1 408 785 5200

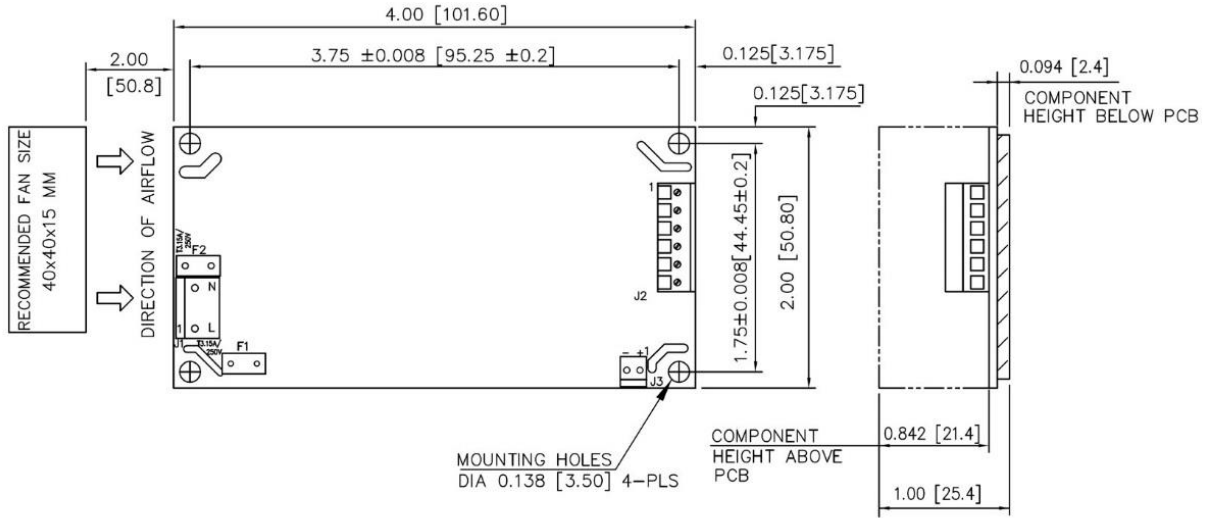


Figure 4. Mechanical Drawing – Screw Terminal (Option 1)

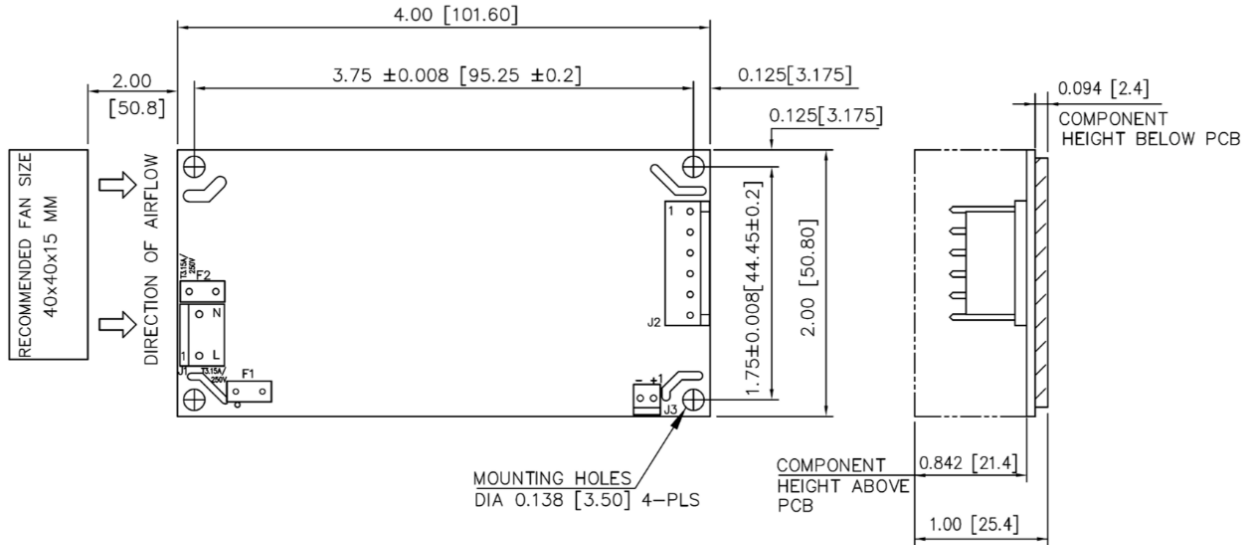


Figure 5. Mechanical Drawing – Molex Connector (Option 2)

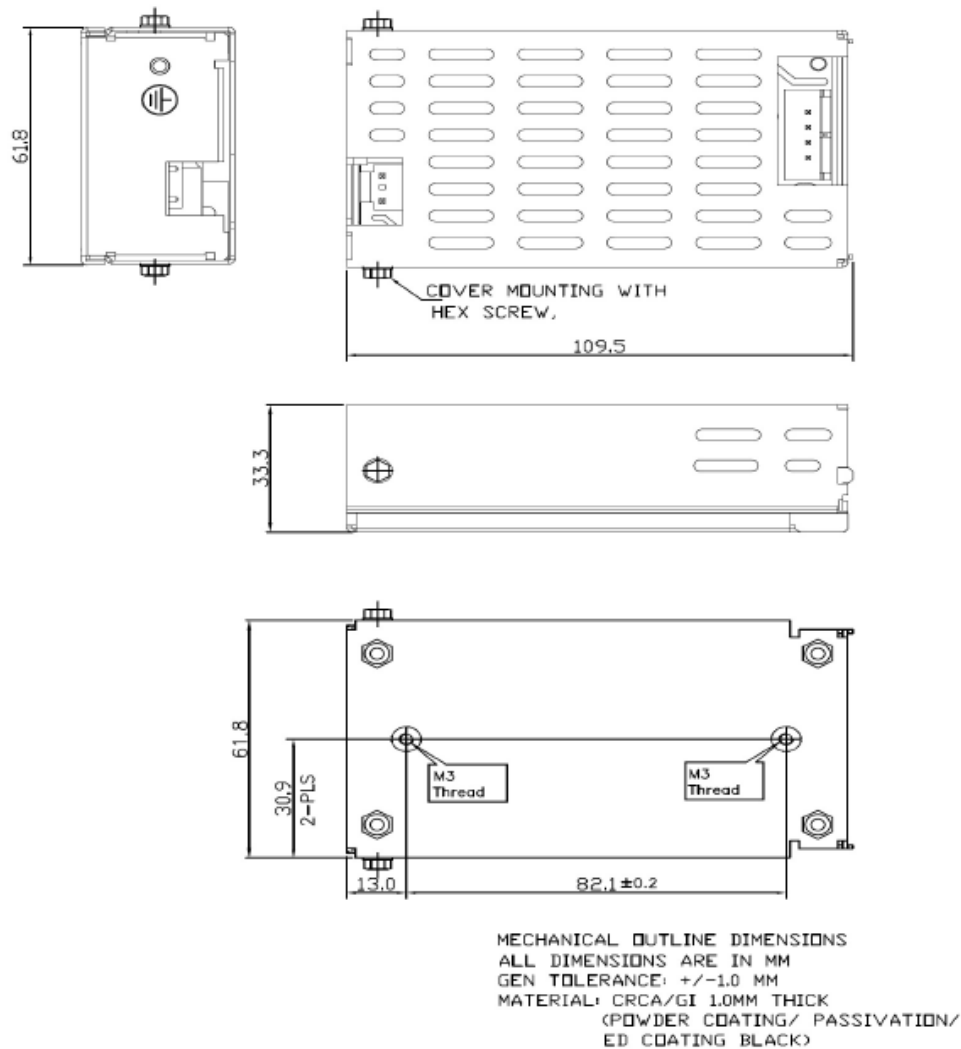


Figure 6. Mechanical Drawing – With Cover Kit

NOTES: In case the PCB is mounted in a metal enclosure, using metal hardware ensure the following:

- 1 Stand off, used to mount PCB has OD of 5.4 mm max.
- 2 Screws, used to fix PCB on stand off, have head dia of 6.0 mm max.
- 3 Washer, if used, to have dia of 6.5 mm max.

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bel Power Solutions:

[ABC225-1T24L](#) [ABC225-1012L](#) [ABC225-1T48L](#) [ABC225-1015L](#) [ABC225-1048L](#) [ABC225-1T12L](#) [ABC225-1024L](#)
[ABC225-1T15L](#) [ABC225-1058L](#) [ABC225-1T30L](#)