

Metal Film Resistors, Industrial, ± 1 % Tolerance

FEATURES

 Dual power rating: $P_{70} = 0.25 \text{ W}$ with 0.5 % stability $P_{70} = 0.50 \text{ W}$ with 1.0 % stability




COMPLIANT



- Superior electrical performance
- · Flame retardant epoxy conformal coating (red brown color)
- Standard 5 band color code marking for ease of identification after mounting
- Tape and reel packaging for automatic insertion (52.4 mm inside tape spacing per EIA-296-E)
- Lead (Pb)-free solder contacts
- · Pure tin plating provides compatibility with lead (Pb)-free and lead containing soldering processes
- · Material categorization: for definitions of compliance please see www.vishay.com/doc?99912

STANDARD ELECTRICAL SPECIFICATIONS						
PRODUCT	POWER RATING P ₇₀ W	LIMITING ELEMENT VOLTAGE MAX. V≅	TEMPERATURE COEFFICIENT ± ppm/K	TOLERANCE ± %	RESISTANCE RANGE Ω	E-SERIES
CCF55	0.25	250	100	1	10 to 3.01M	E96
CCF55	0.5	250	100	1	10 to 3.01M	E96


TECHNICAL SPECIFICATIONS				
PARAMETER	UNIT	CCF55		
Rated Dissipation, P ₇₀	W	0.25/0.5		
Maximum Working Voltage, U _{max.}	V≅	≤ 250		
Insulation Voltage (1 min)	V _{eff}	500		
Dielectric Strength	V _{AC}	450		
Insulation Resistance	Ω	≥ 10 ¹¹		
Operating Temperature Range	°C	-65 to +165		
Terminal Strength (pull test)	lb	2		
Weight	g	0.35 max.		

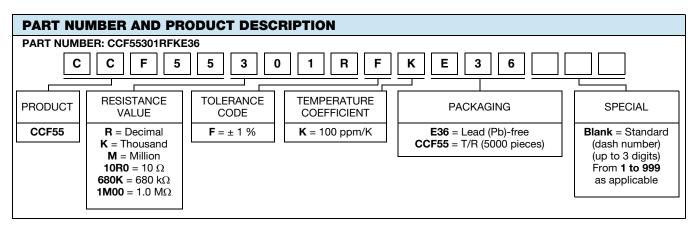

Revision: 23-Jul-14 Document Number: 31015



DIMENSIONS in inches (millimeters)




PRODUCT	Α	В	C (Max.)	D	E
CCF55	0.245 ± 0.020	0.090 ± 0.008	0.295	0.022 ± 0.002	1.100 ± 0.040
	(6.22 ± 0.51)	(2.29 ± 0.20)	(7.5)	(0.58 ± 0.05)	(27.94 ± 1.02)

RESISTANCE VALUES

Vishay CCF55 is available in the standard 96 resistance values per decade. Values are obtained from the following decade table by multiplying by powers of 10. As an example: 30.1 can represent 30.1 Q 301 Q 3.01 kQ 30.1 kQ or 301 kQ

				mple: 30.1 α or 301 k Ω .	
10.0	14.7	21.5	31.6	46.4	68.1
10.2	15.0	22.1	32.4	47.5	69.8
10.5	15.4	22.6	33.2	48.7	71.5
10.7	15.8	23.2	34.0	49.9	73.2
11.0	16.2	23.7	34.8	51.1	75.0
11.3	16.5	24.3	35.7	52.3	76.8
11.5	16.9	24.9	36.5	53.6	78.7
11.8	17.4	25.5	37.4	54.9	80.6
12.1	17.8	26.1	38.3	56.2	82.5
12.4	18.2	26.7	39.2	57.6	84.5
12.7	18.7	27.4	40.2	59.0	86.6
13.0	19.1	28.0	41.2	60.4	88.7
13.3	19.6	28.7	42.2	61.9	90.9
13.7	20.0	29.4	43.2	63.4	93.1
14.0	20.5	30.1	44.2	64.9	95.3
14.3	21.0	30.9	45.3	66.5	97.6

DERATING

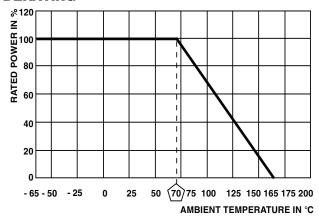

MARKING

The nominal resistance and tolerance are marked on the resistor using five colored bands in accordance with IEC 60062, marking codes for resistors and capacitors.

PERFORMANCE				
RATED DISSIPATION, P ₇₀				
CCF55	1/4 W	1/2 W		
TEST (1)	MAXIMUM ΔR	MAXIMUM ∆R		
Thermal Shock	± 0.5 %	-		
Short Time Overload	± 0.5 %	-		
Low Temperature Operation	± 0.5 %	-		
Moisture Resistance	± 1.5 %	-		
Resistance to Soldering Heat	± 0.5 %	-		
Shock/Bump	± 0.5 %	-		
Vibration	± 0.5 %	-		
Life	± 0.5 %	± 1.0 %		
Terminal Strength	± 0.2 %	-		
Dielectric Withstanding Voltage	± 0.5 %	-		

Note

(1) Test specifications as per IEC 60115-1



Legal Disclaimer Notice

Vishay

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Vishay:

```
CCF55510RFKR36 CCF5571K5FKR36 CCF551K91FKR36 CCF556K19FHR362 CCF5516K5FKR36
CCF55475KFHR362 CCF552K37FKR36 CCF5518K2FKR36 CCF554K99FHR362 CCF555K76FKR36
CCF5533R2FKR36 CCF552K55FKR36 CCF554K53FHR362 CCF5527R4FKR36 CCF55576KFKR36
CCF552K15FKR36 CCF55107RFKR36 CCF55432KFHR362 CCF551K58FKR36 CCF55100RFKR36
CCF55105RFKR36 CCF55162RFKR36 CCF55150RFKR36 CCF55464KFKR36 CCF5521R5FKR36
CCF552M21FKR36 CCF55196RFKR36 CCF55110RFKR36 CCF551K47FKR36 CCF55301KFHR362
CCF552M00FKR36 CCF552K00FKR36 CCF55866RFKR36 CCF55976KFKR36 CCF551K00FKR36
CCF55825RFKR36 CCF551M00FKR36 CCF558K45FHR362 CCF551K65FKR36 CCF5516K2FKR36
CCF5520R0FKR36 CCF554K22FHR362 CCF5510R0FKR36 CCF552K67FKR36 CCF55249KFKR36
CCF55133KFHR362 CCF55549KFKR36 CCF55147KFKR36 CCF5521K5FHR362 CCF55143KFKR36
CCF5539K2FKR36 CCF55681KFKR36 CCF5523R2FHR362 CCF55301RFKR36 CCF55383RFKR36
CCF5556R2FKR36 CCF55340RFKR36 CCF5573K2FKR36 CCF5533K2FKR36 CCF55267RFKR36
CCF55604RFKR36 CCF55681RFKR36 CCF5561K9FKR36 CCF55243RFKR36 CCF55249RFKR36
CCF552K32FKR36 CCF551K24FKR36 CCF55261KFKR36 CCF555K90FHR362 CCF55475RFKR36
CCF55432RFKR36 CCF5590R9FKR36 CCF55402RFKR36 CCF5527K4FKR36 CCF559K31FKR36
CCF553K24FKR36 CCF553K09FKR36 CCF55768RFHR362 CCF552K05FKR36 CCF5549R9FKR36
CCF5523K7FKR36 CCF552K21FKR36 CCF5524K9FKR36 CCF552K87FHR362 CCF55806KFKR36
CCF554K75FKR36 CCF5540R2FKR36 CCF556K98FKR36 CCF55931RFHR362 CCF5520K5FHR362
CCF554K22FKR36 CCF554K87FKR36 CCF5573R2FKR36 CCF5517K8FKR36 CCF5517K4FKR36
CCF552K43FKR36 CCF552K80FKR36 CCF55402KFKR36 CCF555K62FKR36 CCF5516R2FKR36
```