

Modular Signal Towers / KombiSIGN 72  
**TwinLIGHT Classic 24VAC/DC GN**



<b>Part No.:</b>	<b>647.210.75</b>
<b>Series:</b>	<b>KombiSIGN 72</b>



<b>MECHANICAL DATA</b>	
Height	66 mm
Diameter	70 mm
Materials	PC
Dome colour	Green
Protection category	IP65
Working temperature minimum	-30°C
Working temperature maximum	+60°C
Weight with packaging	91 g
Product weight	77 g

<b>ELECTRICAL DATA</b>	
Operating voltage	24V
Operating voltage type	AC/DC
Operating voltage frequency	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	80 mA
Rated inrush current	500 mA
Protection class	Protection class 2
Pollution degree	3

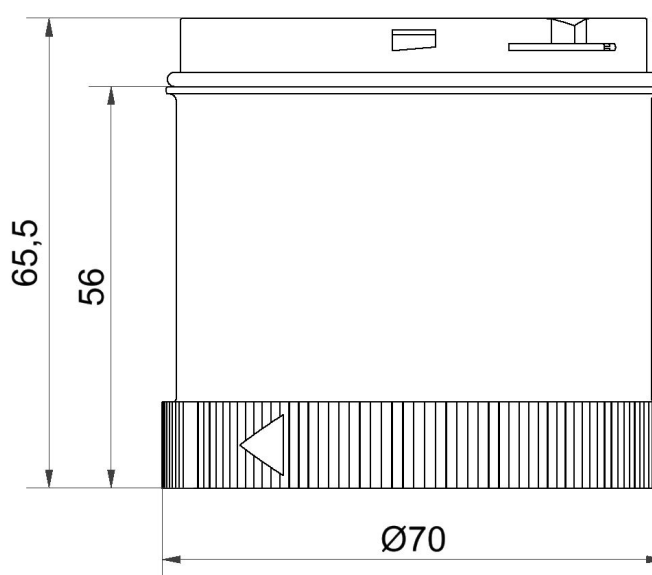
<b>OPTICAL DATA</b>	
Light source	LED
Light colour	Green
Optical signal image	Blink Permanent TwinLight
Blink frequency (Hz)	1 Hz
Service life optical	50,000 h maximum

<b>APPROVAL DATA</b>	
Conforms with CE	Yes
WEEE	Yes
Conforms with RED directive	No
Conform with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Type 12
Conforms with FCC	No
Conforms with IC	No

**!** For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Modular Signal Towers / KombiSIGN 72  
**TwinLIGHT Classic 24VAC/DC GN**

EAC certificate available	Yes
Conforms with AS-I	No
ICAO Certification	No
Conforms with GL	No
Conforms with RoHS CN	No
Conforms with VdS	No

**DRAWING**

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.