

One-way flow control valves

FESTO



One-way flow control valves

Key features

FESTO

Function

Flow control or one-way flow control valves regulate the piston speed of pneumatic drives during advance and return strokes. This is done through suitable restriction of the flow rate of compressed air in exhaust air or supply air direction. With the one-way

flow control valve GRLA or GRLZ, the flow control function works in one direction only (exhaust air or supply air); the non-return function works in the opposite direction. With the flow control valve GRLO, the flow control function is active in both directions.

The flow control function creates an adjustable annular gap inside the valve. This gap can be increased or decreased by turning the knurled screw or slotted head screw. The required restriction can be set with the help of this adjustment component.



Note

The documentation for the flow control valves can be found at
→ www.festo.com/catalogue

General information


Standard nominal flow rate qN

The standard nominal flow rate qN is the flow rate based on standard conditions at an operating pressure of $p_1 = 6$ bar and an output pressure of $p_2 = 5$ bar, measured at room temperature $t = 20^\circ\text{C}$.


Standard flow rate qn

The standard flow rate is measured at an operating pressure of $p_1 = 6$ bar and an output pressure with respect to atmospheric pressure ($p_2 = 0$ bar).

Exhaust air one-way flow control function




Supply air one-way flow control function




Flow control function in both directions



Flow measurement circuit

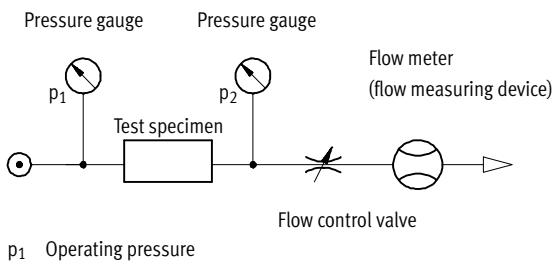





p₁ Operating pressure
p₂ Output pressure

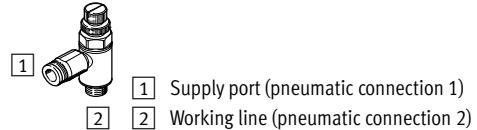

One-way flow control valves

FESTO

Key features

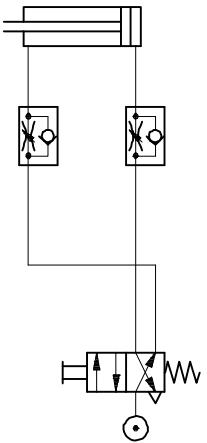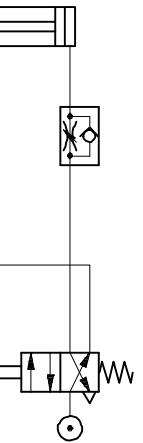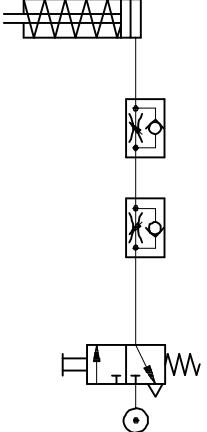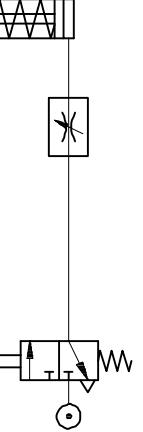Flow control functions and range of applications			
Application	Description	Application	Description
Double-acting cylinder with one-way flow control valve			
Exhaust air one-way flow control function	<p>Speed adjustment through exhaust air flow control. Uncontrolled supply air and controlled exhaust air move the piston between air cushions (improves motion, even with load changes).</p> 	Supply air one-way flow control function	<p>Adjustable speed during advance and return strokes. The flow rate is identical in both directions.</p> 
Single-acting cylinder with one-way flow control valve			
Exhaust air and supply air one-way flow control function	<p>Adjustable speed during advance and return strokes. The flow rate can be adjusted differently for both directions.</p> 	Single-acting cylinder with flow control valve	<p>Flow control function in both directions</p> 

Application examples

Mini slide SLT with one-way flow control valve, standard



Flat cylinder DZF with one-way flow control valve, mini



Multimount cylinder DMM with one-way flow control valve, mini



One-way flow control valves

Product range overview

FESTO

Version	Valve function	Version	Type	Connection direction	Pneumatic connection 1	Pneumatic connection 2	qnN ¹⁾ [l/min]	Adjustment component	➔ Page/ Internet
Standard									
Metal									
Exhaust air one-way flow control function		GRLA	Elbow outlet	QS-3, QS-4, QS-6, QS-8, QS-10, QS-12	M5, G1/8, G1/4, G3/8, G1/2	100 ... 1,580	Slotted head screw	8	
							Knurled screw		
					M5, G1/8, G1/4, G3/8, G1/2, G3/4	95 ... 4,320	Slotted head screw	12	
					M5, G1/8, G1/4	95 ... 610	Knurled screw		
Supply air one-way flow control function		GRLSA	Elbow outlet	PK-3, PK-4, PK-6	M5, G1/8, G1/4	83 ... 540	Slotted head screw	12	
							Rotary knob with scale, internal hex		
							0 ... 450	17	
							Slotted head screw		
Nickel-plated metal		GRLZ	Elbow outlet	QS-3, QS-4, QS-6, QS-8	M5, G1/8	100 ... 215	Slotted head screw	8	
							Slotted head screw	12	
					M5, G1/8, G1/4	95 ... 610	Knurled screw		
					PK-3, PK-4, PK-6	M5, G1/8, G1/4	83 ... 540	Slotted head screw	12
Polymer		VFOH-LE	Elbow outlet	QS-4, QS-6	Push-in sleeve ²⁾ QS-4, QS-6	100 ... 270	Slotted head screw	20	
Flat									
Exhaust air one-way flow control function		GRLA	Elbow outlet	QS-6, QS-8	G1/8, G1/4, G3/8	520 ... 650	Knurled screw	24	

1) Standard nominal flow rate in direction of flow control.

2) Only suitable for push-in connector QS.

One-way flow control valves

FESTO

Product range overview

Version	Valve function	Version	Type	Connection direction	Pneumatic connection 1	Pneumatic connection 2	qnN ¹⁾ [l/min]	Adjustment component	➔ Page/ Internet
Mini									
Metal	Exhaust air one-way flow control function	GRLA	Elbow outlet	QS-3, QS-4	M3, M5	40 ... 41	Slotted head screw	26	
					M3	M3	0 ... 18	Slotted head screw	29
					GRGA	Parallel outlet	QS-3	M3	0 ... 41
	Supply air one-way flow control function	GRLZ	Elbow outlet	QS-3, QS-4	M3, M5	41 ... 48	Slotted head screw	26	
					M3	M3	0 ... 18	Slotted head screw	29
					GRGZ	Parallel outlet	QS-3	M3	0 ... 41
In-line installation									
Metal	One-way flow control function	GR/GRA	Inline	M3, M5, G $\frac{1}{8}$, G $\frac{1}{4}$, G $\frac{3}{8}$, G $\frac{1}{2}$, G $\frac{3}{4}$	M3, M5, G $\frac{1}{8}$, G $\frac{1}{4}$, G $\frac{3}{8}$, G $\frac{1}{2}$, G $\frac{3}{4}$	29.5 ... 3,300	Knurled screw	gr	
Polymer	One-way flow control function	GR	Inline	QS-3, QS-4, QS-6, QS-8	QS-3, QS-4, QS-6, QS-8	40 ... 250	Knurled screw	gr	
Corrosion-resistant									
Stainless steel	Exhaust air one-way flow control function	CRGLA	Elbow outlet	M5, G $\frac{1}{8}$, G $\frac{1}{4}$, G $\frac{3}{8}$, G $\frac{1}{2}$	M5, G $\frac{1}{8}$, G $\frac{1}{4}$, G $\frac{3}{8}$, G $\frac{1}{2}$	95 ... 2,100	Slotted head screw	31	
Function combination									
Metal	Exhaust air one-way flow control function	GRXA	Elbow outlet	QS-4, QS-6, QS-8	G $\frac{1}{8}$, G $\frac{1}{4}$	130 ... 280	Slotted head screw	34	
Polymer	Exhaust air one-way flow control function	VFOF	Elbow outlet	QS-6, QS-8	G $\frac{1}{8}$, G $\frac{1}{4}$	240 ... 590	Internal hex	vfov	

1) Standard nominal flow rate in direction of flow control.

One-way flow control valves

Type codes

FESTO

GRLA/GRLSA/GRGA/CRGRLA/GRLZ/GRGZ

GRLA	-	1/8	-	QS	-	6	-		-		-	D
------	---	-----	---	----	---	---	---	--	---	--	---	---

Type

Exhaust air one-way flow control function	
GRLA	One-way flow control valve, elbow outlet
GRLSA	One-way flow control valve, elbow outlet with rotary knob
GRGA	One-way flow control valve, parallel outlet
CRGRLA	One-way flow control valve, elbow outlet, corrosion-resistant
GRXA-HG	One-way flow control valve, function combination

Supply air one-way flow control function

GRLZ	One-way flow control valve, elbow outlet
GRGZ	One-way flow control valve, parallel outlet

Pneumatic connection 2

M3, M5, 1/8, 1/4, 3/8, 1/2, 3/4	Male thread
---------------------------------------	-------------

Pneumatic connection 1

Connection type

-	Female thread (connection size as for connection 2)
QS	Push-in connector QS
PK	Barbed connector

Tubing O.D. or tubing I.D.

3, 4, 6, 8, 10, 12	Tubing O.D. with push-in connector QS
3, 4, 6	Tubing I.D. with barbed connector PK

Adjustment component

-	Slotted head screw
RS	Knurled screw

Flow rate characteristic

LF	Low flow
MF	Medium flow

Generation

B	B series
C	C series
D	D series

One-way flow control valves

FESTO

Type codes

VOFC

VOFC - S - S6 - Q6

Type

VOFC One-way flow control valve, elbow outlet

Valve function

S Supply air one-way flow control function

Pneumatic connection 2

S4 Push-in sleeve QS-4

S6 Push-in sleeve QS-6

Pneumatic connection 1

Q4 Push-in connector QS-4

Q6 Push-in connector QS-6

VOFH-LE

VOFH - L - E - A - G18 - Q6

Type

VOFH One-way flow control valve

Design

L L-shaped outlet

Valve function

E Exhaust air one-way flow control function

Adjusting element

A External hex

Pneumatic connection 2

G18 Thread G $\frac{1}{8}$

G14 Thread G $\frac{1}{4}$

Pneumatic connection 1

Q4 Push-in connector QS-4

Q6 Push-in connector QS-6

Q8 Push-in connector QS-8

Q10 Push-in connector QS-10


One-way flow control valves GRLA/GRLZ, standard

Technical data – Push-in connector QS, metal

FESTO

One-way flow control function

Exhaust air Supply air



- - Flow rate
100 ... 1,580 l/min
- - Temperature range
-10 ... +60 °C
- - Operating pressure
0.2 ... 10 bar

- Can be swivelled 360° around the screw-in axis after mounting



General technical data – GRLA

Valve function	Exhaust air one-way flow control function				
Pneumatic connection 2	M5	G1/8	G1/4	G3/8	G1/2
Pneumatic connection 1	QS-3, QS-4, QS-6	QS-3, QS-4, QS-6, QS-8	QS-6, QS-8, QS-10	QS-6, QS-8, QS-10	QS-12
Adjustment component	Slotted head screw				
	Knurled screw				
Type of mounting	Screw-in, via male thread				
Mounting position	Any				
Nominal tightening torque [Nm]	0.8 ±10%	3 ±10%	5 ±10%	10 ±10%	15 ±10%

General technical data – GRLZ

Valve function	Supply air one-way flow control function					
Pneumatic connection 2	M5	G1/8				
Pneumatic connection 1	QS-3, QS-4, QS-6	QS-3, QS-4, QS-6, QS-8				
Adjustment component	Slotted head screw					
Type of mounting	Screw-in, via male thread					
Mounting position	Any					
Nominal tightening torque [Nm]	0.8 ±10%	3 ±10%				


Operating and environmental conditions

Operating pressure complete temperature range	[bar]	0.2 ... 10
Operating medium	Compressed air in accordance with ISO 8573-1:2010 [7:4:4]	
Note on operating/pilot medium	Operation with lubricated medium possible (in which case lubricated operation will always be required)	
Ambient temperature	[°C]	-10 ... +60
Temperature of medium	[°C]	-10 ... +60
Storage temperature	[°C]	-10 ... +40
Certification	Germanischer Lloyd	

Standard nominal flow rate qnN at 6 → 5 bar

as a function of turns of the adjusting screw n


GRLA/GRLZ-M5

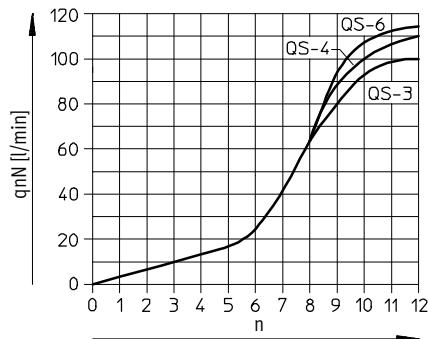

Standard flow rate qn at 6 → 0 bar

as a function of turns of the adjusting screw n

GRLA/GRLZ-M5

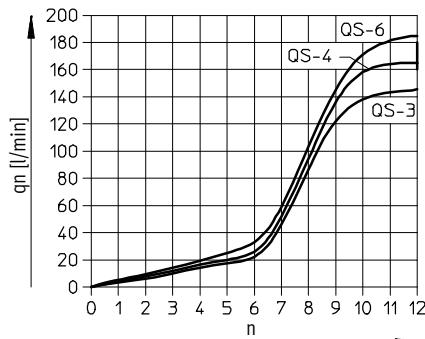


One-way flow control valves GRLA/GRLZ, standard


FESTO

Technical data – Push-in connector QS, metal


**Standard nominal flow rate q_{nN} at 6 → 5 bar
as a function of turns of the adjusting screw n**
GRLA/GRLZ-1/8

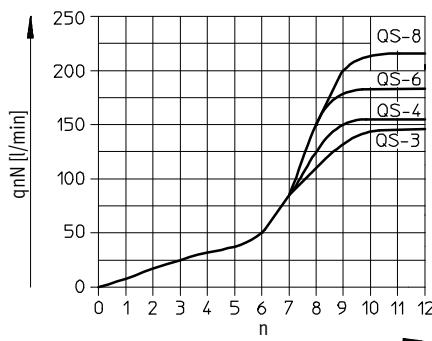


**Standard flow rate q_n at 6 → 0 bar
as a function of turns of the adjusting screw n**
GRLA/GRLZ-1/8

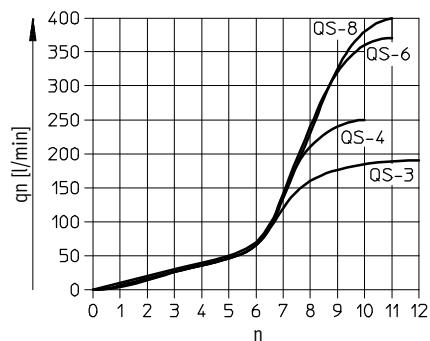


GRLA-1/8...-MF/GRLA-1/4

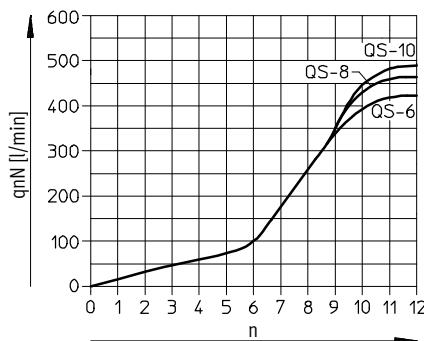


GRLA-1/8...-MF/GRLA-1/4

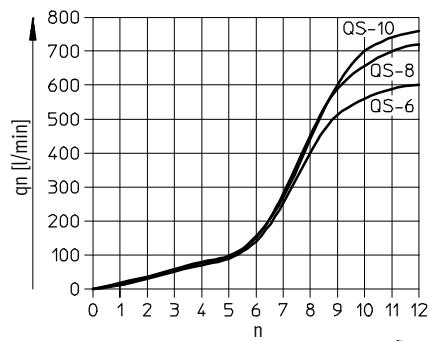


GRLA-3/8

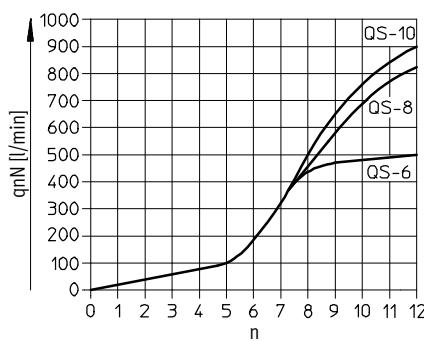


GRLA-3/8

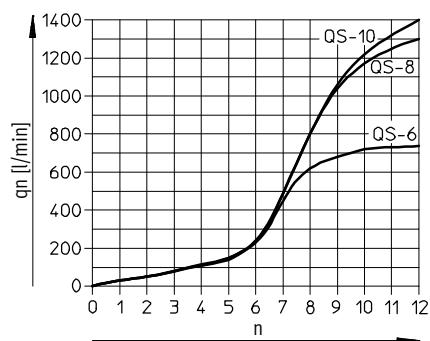

GRLA-1/2

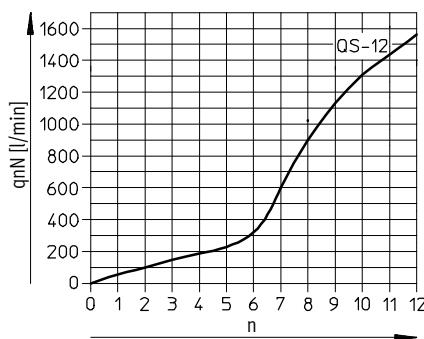

GRLA-1/2

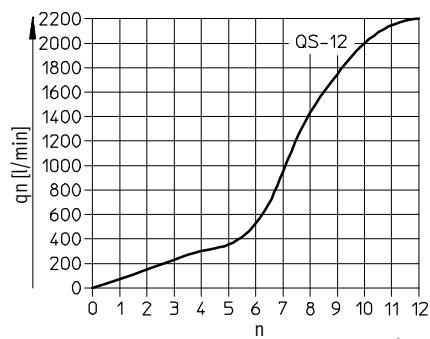


One-way flow control valves GRLA/GRLZ, standard

Technical data – Push-in connector QS, metal

FESTO

Materials

Sectional view

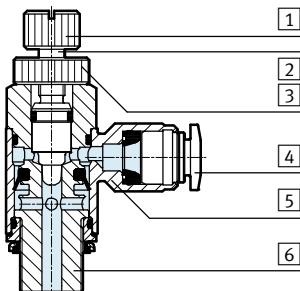


One-way flow control valve


[1] Knurled head (only GRLA...-RS)	Anodised wrought aluminium alloy
[2] Adjusting screw	Brass
[3] Hollow bolt (only GRLA...-RS)	Anodised wrought aluminium alloy
[4] Releasing ring	POM
[5] Swivel connection	Die-cast zinc, chromed
[6] Threaded plug	Wrought aluminium alloy GRLA/GRLZ-M5: Brass
- Seals	NBR
Note on materials	RoHS-compliant

Dimensions

Slotted head screw

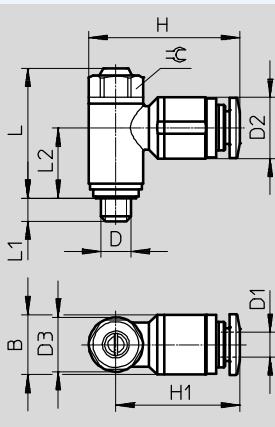

Knurled screw

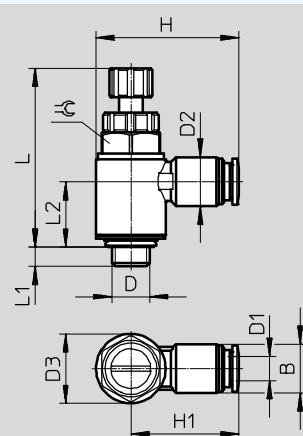

Download CAD data → www.festo.com

Type	Connection D	Tubing O.D. D1	B	D2 ∅	D3 ∅	H	H1	Lmax.		L1	L2	=C
								Slotted head screw	Knurled screw			
GRL...-M5	M5	3	–	8.2 ±0.15	8.9 ±0.07	22.4	18	20.45	30.35	3.9 +0.1/-0.45	10.7	8
		4	9.8 ±0.2	10.0 ±0.2		24.7	20.3				9.7	
		6	–	12.0 ±0.2		26.5	22					
GRL...-1/8	G1/8	3	–	10.2 ±0.2	13.8 ±0.07	31.9	25	26.7	40.2	5.05 +0.15/-0.3	14.2	12
		4	–	10.2 ±0.2		29.4	22.5				13.5	
		6	–	12.5 ±0.2		32.6	25.7					
		8	–	14.5 ±0.2		35.6	28.7					
GRLA-1/8-...-MF		6	–	12.5 ±0.2	17.8 ±0.15	36.6	27.7	31.3	–	5.05 +0.15/-0.3	17	15
		8	–	14.5 ±0.2		39.6	30.7					
GRLA-1/4	G1/4	6	–	12.5 ±0.2	17.8 ±0.15	36.6	27.7	31.5	48.3	5.9 +0.17/-0.25	17.2	15
		8	–	14.5 ±0.2		39.6	30.7				16.1	
		10	–	17.5 ±0.2		42.0	33.1					
GRLA-3/8	G3/8	6	–	12.5 ±0.2	22.4 ±0.15	39.8	28.6	35.25	54.55	6.9 +0.15/-0.3	19.55	19
		8	–	14.5 ±0.2		44.1	32.9					
		10	–	17.5 ±0.2		46.7	35.5					
GRLA-1/2	G1/2	12	–	20.5 ±0.15	27.8 ±0.15	55.3	41.4	42.05	65.45	8.35 +0.15/-0.3	22.75	24

One-way flow control valves GRLA/GRLZ, standard

FESTO

Technical data – Push-in connector QS, metal

Ordering data – Exhaust air one-way flow control function

Pneumatic connection		Standard nominal flow rate qnN at 6 → 5 bar		Standard flow rate qn at 6 → 0 bar		Weight [g]	Part No.	Type
in direction of flow control	in non-return direction	in direction of flow control	in non-return direction					
2	1	[l/min]	[l/min]	[l/min]	[l/min]			

Slotted head screw

	M5	QS-3	100	60 ... 100	145	150 ... 170	13	193137	GRLA-M5-QS-3-D
	QS-4	110	65 ... 110	165	140 ... 160	193138		GRLA-M5-QS-4-D	
	QS-6	115	70 ... 110	185	145 ... 170	193139		GRLA-M5-QS-6-D	
	G1/8	QS-3	130	100 ... 130	180	200 ... 220	22	193142	GRLA-1/8-QS-3-D
		QS-4	160	120 ... 190	250	270 ... 300		193143	GRLA-1/8-QS-4-D
		QS-6	185	160 ... 240	370	330 ... 390		193144	GRLA-1/8-QS-6-D
			400	290 ... 420	600	570 ... 680	32	537075	GRLA-1/8-QS-6-MF-D
		QS-8	215	175 ... 250	400	330 ... 410	22	193145	GRLA-1/8-QS-8-D
			475	325 ... 500	720	610 ... 760	32	537076	GRLA-1/8-QS-8-MF-D
	G1/4	QS-6	400	290 ... 420	600	570 ... 680	42	193146	GRLA-1/4-QS-6-D
		QS-8	475	325 ... 500	720	610 ... 760		193147	GRLA-1/4-QS-8-D
		QS-10	480	345 ... 500	760	630 ... 790		193148	GRLA-1/4-QS-10-D
	G3/8	QS-6	495	320 ... 495	740	840 ... 890	60	193149	GRLA-3/8-QS-6-D
		QS-8	820	450 ... 850	1,300	1,080 ... 1,420		193150	GRLA-3/8-QS-8-D
		QS-10	900	540 ... 975	1,400	1,160 ... 1,620		193151	GRLA-3/8-QS-10-D
	G1/2	QS-12	1,580	925 ... 1,605	2,220	1,910 ... 2,500	106	193152	GRLA-1/2-QS-12-D

Knurled screw

	M5	QS-3	100	60 ... 100	145	150 ... 170	14	197576	GRLA-M5-QS-3-RS-D
	QS-4	110	65 ... 110	165	140 ... 160	197577		GRLA-M5-QS-4-RS-D	
	QS-6	115	70 ... 110	185	145 ... 170	197578		GRLA-M5-QS-6-RS-D	
	G1/8	QS-3	130	100 ... 130	180	200 ... 220	23	197579	GRLA-1/8-QS-3-RS-D
		QS-4	160	120 ... 190	250	270 ... 300		197580	GRLA-1/8-QS-4-RS-D
		QS-6	185	160 ... 240	370	330 ... 390		197581	GRLA-1/8-QS-6-RS-D
			400	290 ... 420	600	570 ... 680	24	534337	GRLA-1/8-QS-8-RS-D
		QS-8	475	325 ... 500	720	610 ... 760	50	534338	GRLA-1/4-QS-6-RS-D
		QS-10	480	345 ... 500	760	630 ... 790		534339	GRLA-1/4-QS-8-RS-D
		QS-12	1,580	925 ... 1,605	2,220	1,910 ... 2,500		534340	GRLA-1/4-QS-10-RS-D
	G3/8	QS-6	495	320 ... 495	740	840 ... 890	72	534341	GRLA-3/8-QS-6-RS-D
		QS-8	820	450 ... 850	1,300	1,080 ... 1,420		534342	GRLA-3/8-QS-8-RS-D
		QS-10	900	540 ... 975	1,400	1,160 ... 1,620		534343	GRLA-3/8-QS-10-RS-D
	G1/2	QS-12	1,580	925 ... 1,605	2,220	1,910 ... 2,500	124	534344	GRLA-1/2-QS-12-RS-D

Ordering data – Supply air one-way flow control function

Pneumatic connection		Standard nominal flow rate qnN at 6 → 5 bar		Standard flow rate qn at 6 → 0 bar		Weight [g]	Part No.	Type
in direction of flow control	in non-return direction	in direction of flow control	in non-return direction					
2	1	[l/min]	[l/min]	[l/min]	[l/min]			

Slotted head screw



	M5	QS-3	100	60 ... 100	135	130 ... 160	13	193153	GRLZ-M5-QS-3-D
	QS-4	110	65 ... 110	160	150 ... 180	193154		GRLZ-M5-QS-4-D	
	QS-6	115	70 ... 110	170	160 ... 200	193155		GRLZ-M5-QS-6-D	
	G1/8	QS-3	130	100 ... 130	200	180 ... 200	22	193156	GRLZ-1/8-QS-3-D
		QS-4	160	120 ... 190	300	260 ... 290		193157	GRLZ-1/8-QS-4-D
		QS-6	185	160 ... 240	340	390 ... 460		193158	GRLZ-1/8-QS-6-D
		QS-8	215	175 ... 250	370	390 ... 470		193159	GRLZ-1/8-QS-8-D

One-way flow control valves GRLA/GRLZ, standard

Technical data – Female thread/barbed connector, metal

One-way flow control function

Exhaust air Supply air



- - Flow rate
83 ... 4,320 l/min
- - Temperature range
-10 ... +60 °C
- - Operating pressure
0.2 ... 10 bar



General technical data – GRLA

Valve function	Exhaust air one-way flow control function							
Connection type	Female thread							
Pneumatic connection 2	M5	G ¹ / ₈	G ¹ / ₄	G ³ / ₈	G ¹ / ₂	G ³ / ₄	M5	G ¹ / ₈
Pneumatic connection 1	M5 ¹⁾	G ¹ / ₈ ¹⁾	G ¹ / ₄ ¹⁾	G ³ / ₈ ¹⁾	G ¹ / ₂ ¹⁾	G ³ / ₄ ¹⁾	PK-3, PK-4	PK-3, PK-4, PK-6
Adjustment component	Slotted head screw							
	Knurled screw							
Type of mounting	Screw-in							
Mounting position	Any							
Max. tightening torque	[Nm]	1.5	6	11	20	40	60	1.5
								6
								11

1) Note: This product conforms to ISO 1179-1 and ISO 228-1.

General technical data – GRLZ

Valve function	Supply air one-way flow control function					
Connection type	Female thread					
Pneumatic connection 2	M5	G ¹ / ₈	G ¹ / ₄	M5	G ¹ / ₈	G ¹ / ₄
Pneumatic connection 1	M5 ¹⁾	G ¹ / ₈ ¹⁾	G ¹ / ₄ ¹⁾	PK-3, PK-4	PK-3, PK-4, PK-6	PK-4, PK-6
Adjustment component	Slotted head screw					
	Knurled screw					
Type of mounting	Screw-in					
Mounting position	Any					
Max. tightening torque	[Nm]	1.5	6	11	1.5	6
						11

1) Note: This product conforms to ISO 1179-1 and ISO 228-1.

Operating and environmental conditions

Pneumatic connection 2	M5	G ¹ / ₈	G ¹ / ₄	G ³ / ₈	G ¹ / ₂	G ³ / ₄
Operating pressure [bar]	0.2 ... 10	0.3 ... 10				
Operating medium	Compressed air in accordance with ISO 8573-1:2010 [7:4:4]					
Note on operating/pilot medium	Operation with lubricated medium possible (in which case lubricated operation will always be required)					
Ambient temperature [°C]	-10 ... +60					
Temperature of medium [°C]	-10 ... +60					
Storage temperature [°C]	-10 ... +40					
Certification	GRLA: Germanischer Lloyd					


One-way flow control valves GRLA/GRLZ, standard

FESTO

Technical data – Female thread/barbed connector, metal


Standard nominal flow rate q_{nN} at 6 → 5 bar
as a function of turns of the adjusting screw n

GRLA/GRLZ-M5

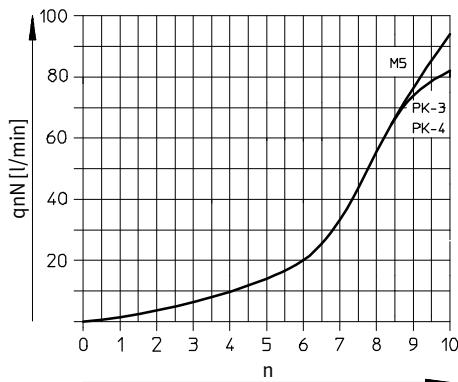


Standard flow rate q_n at 6 → 0 bar
as a function of turns of the adjusting screw n


GRLA/GRLZ-M5

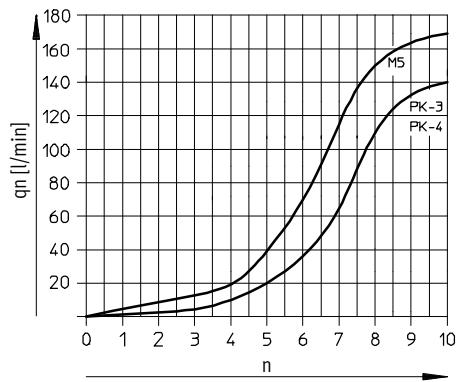


GRLA/GRLZ-1/8

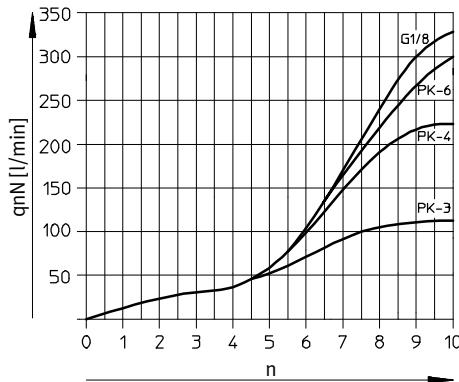


GRLA/GRLZ-1/8

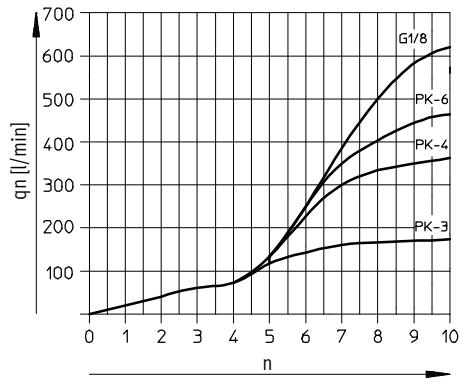

GRLA/GRLZ-1/4

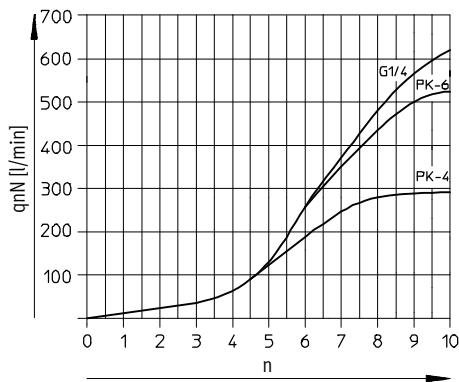

GRLA/GRLZ-1/4

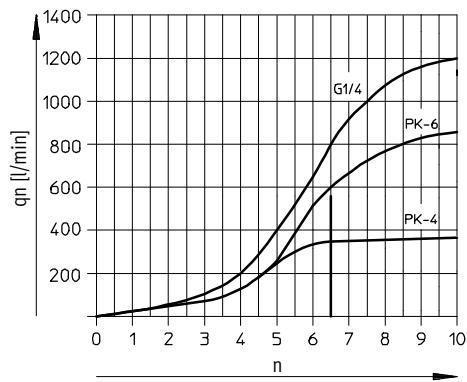


One-way flow control valves GRLA/GRLZ, standard

Technical data – Female thread/barbed connector, metal

FESTO


Standard nominal flow rate q_{nN} at 6 → 5 bar
as a function of turns of the adjusting screw n

GRLA-3/8

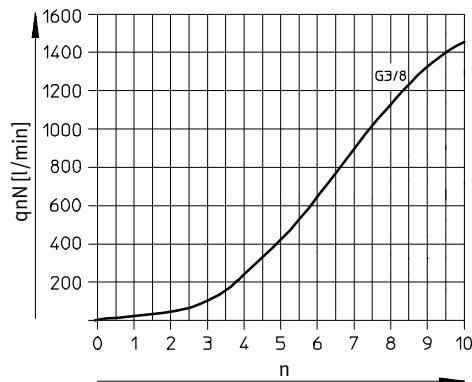


Standard flow rate q_n at 6 → 0 bar
as a function of turns of the adjusting screw n


GRLA-3/8

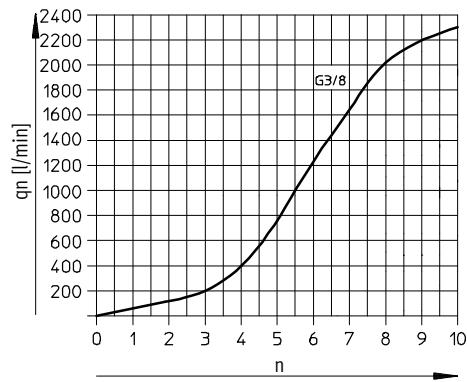


GRLA-1/2

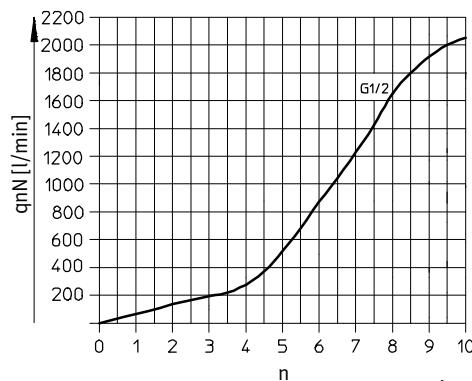


GRLA-1/2

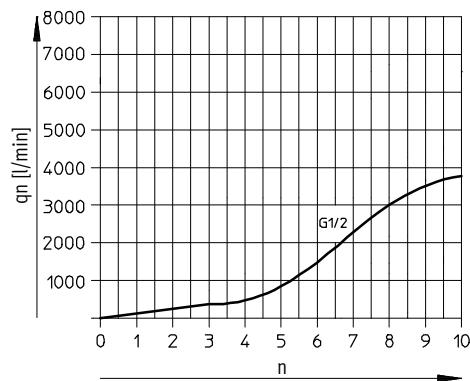

GRLA-3/4

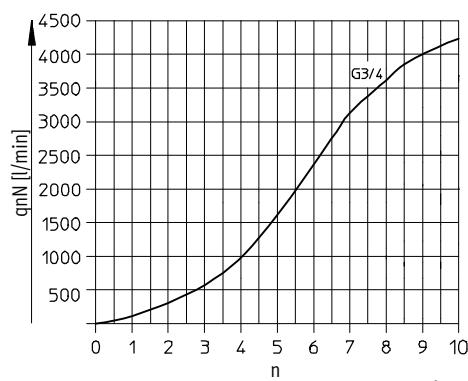


GRLA-3/4

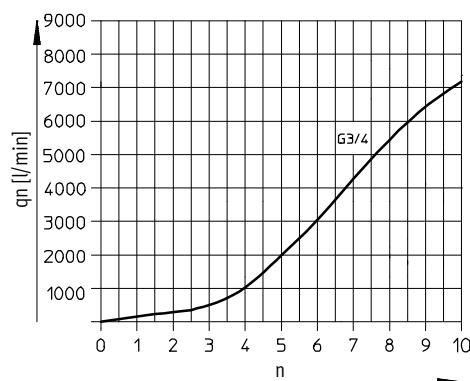

Materials

Sectional view

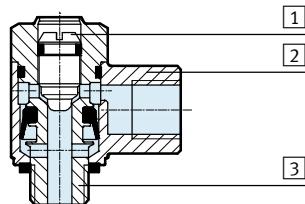

One-way flow control valve

[1] Adjusting screw	Brass
[2] Swivel connection	Die-cast zinc
[3] Threaded plug	Wrought aluminium alloy GRLA/GRLZ-M5: Nickel-plated brass
- Seals	NBR
Note on materials	RoHS-compliant

One-way flow control valves GRLA/GRLZ, standard


FESTO

Technical data – Female thread/barbed connector, metal


Dimensions – Female thread connection type

Download CAD data ➔ www.festo.com

Slotted head screw

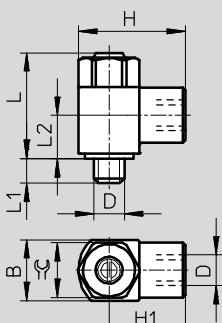

Knurled screw

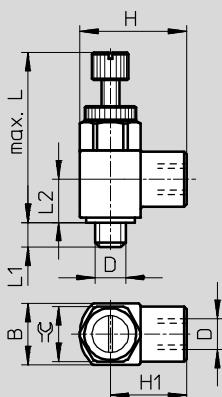



Type	Connection D	Nominal size [mm]	B	H	H1	Lmax.		L1	L2	=C
						Slotted head screw	Knurled screw			
GRL...-M5	M5	2	10 -0.15	17.5	12.5	17.6	27.3	4.0 ±0.3	7.1	9
GRL...-1/8	G1/8	4	16 -0.15	28	20	25.2	38.6	5.3 +0.45/-0.35	10.3	14
GRL...-1/4	G1/4	6	20 -0.2	36	26	30.8	54.8	8.2 +0.45/-0.35	13.2	17
GRLA-3/8	G3/8	8.5	25 -0.2	41	28.5	37.2	–	8.8 +0.45/-0.35	15.5	22
GRLA-1/2	G1/2	10.6	32 -0.2	53	37	48.6	–	12.8 ±0.45	18.9	27
GRLA-3/4	G3/4	14	41 -0.3	64	43.5	60.2	–	13.5 ±0.5	24.5	36

Note: This product conforms to ISO 1179-1 and to ISO 228-1

Dimensions – Barbed connector connection type

Download CAD data ➔ www.festo.com

Slotted head screw

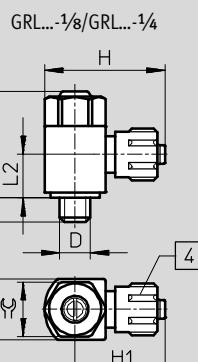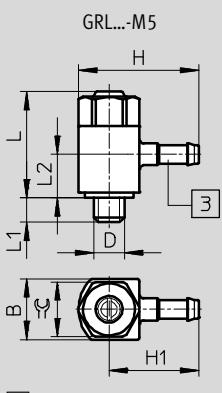

[3] Barbed connector

[4] Union nut

Type	Connection D	Nominal size [mm]	B	H	H1	L max.	L1	L2	=C
GRL...-M5-PK-3	M5	2	10 -0.15	19.7	14.7	17.6	4.0 ±0.3	8.5	9
GRL...-M5-PK-4			10 -0.15	21.7	16.7	17.6	4.0 ±0.3	8.5	9
GRL...-1/8-PK-3	G1/8	4	16 -0.15	27.1	19.1	25.2	5.3 +0.45/-0.35	13.4	14
GRL...-1/8-PK-4			16 -0.15	30.2	22.2	25.2	5.3 +0.45/-0.35	13.4	14
GRL...-1/8-PK-6			16 -0.15	30.3	22.3	25.2	5.3 +0.45/-0.35	12.0	14
GRL...-1/4-PK-4	G1/4	6	20 -0.2	34.2	24.2	30.8	8.2 +0.45/-0.35	16.9	17
GRL...-1/4-PK-6			20 -0.2	34.3	24.3	30.8	8.2 +0.45/-0.35	17.2	17

One-way flow control valves GRLA/GRLZ, standard

Technical data – Female thread/barbed connector, metal

FESTO

Ordering data – Exhaust air one-way flow control function										
	Pneumatic connection		Standard nominal flow rate qnN at 6 → 5 bar		Standard flow rate qn at 6 → 0 bar		Weight [g]	Part No. Type		
			in direction of flow control		in direction of flow control					
	2	1	[l/min]	[l/min]	[l/min]	[l/min]				
Slotted head screw										
	M5	M5	95	76 ... 95	169	135 ... 170	11	151160 GRLA-M5-B		
	G $\frac{1}{8}$	G $\frac{1}{8}$	340	260 ... 420	615	470 ... 760	28	151165 GRLA- $\frac{1}{8}$ -B		
	G $\frac{1}{4}$	G $\frac{1}{4}$	610	450 ... 820	1,200	885 ... 1,615	59	151172 GRLA- $\frac{1}{4}$ -B		
	G $\frac{3}{8}$	G $\frac{3}{8}$	1,450	970 ... 1,600	2,300	1,540 ... 2,540	97	151178 GRLA- $\frac{3}{8}$ -B		
	G $\frac{1}{2}$	G $\frac{1}{2}$	2,100	1,550 ... 2,200	4,000	2,950 ... 4,190	204	151179 GRLA- $\frac{1}{2}$ -B		
	G $\frac{3}{4}$	G $\frac{3}{4}$	4,320	3,220 ... 4,720	7,300	5,440 ... 7,300	377	151180 GRLA- $\frac{3}{4}$ -B		
Knurled screw										
	M5	PK-3	83	72 ... 83	140	120 ... 140	10	151161 GRLA-M5-PK-3-B		
		PK-4	83	76 ... 88	140	128 ... 148	10	151162 GRLA-M5-PK-4-B		
	G $\frac{1}{8}$	PK-3 ¹⁾	110	100 ... 110	162	145 ... 165	22	151166 GRLA- $\frac{1}{8}$ -PK-3-B		
		PK-4 ¹⁾	230	190 ... 240	360	295 ... 375	25	151167 GRLA- $\frac{1}{8}$ -PK-4-B		
		PK-6 ¹⁾	300	210 ... 290	455	320 ... 440	26	151168 GRLA- $\frac{1}{8}$ -PK-6-B		
	G $\frac{1}{4}$	PK-4 ¹⁾	260	220 ... 260	370	315 ... 370	44	151173 GRLA- $\frac{1}{4}$ -PK-4-B		
		PK-6 ¹⁾	540	410 ... 585	840	635 ... 910	45	151174 GRLA- $\frac{1}{4}$ -PK-6-B		

1) Via union nut

Ordering data – Supply air one-way flow control function										
	Pneumatic connection		Standard nominal flow rate qnN at 6 → 5 bar		Standard flow rate qn at 6 → 0 bar		Weight [g]	Part No. Type		
			in direction of flow control		in direction of flow control					
	2	1	[l/min]	[l/min]	[l/min]	[l/min]				
Slotted head screw										
	M5	M5	95	76 ... 95	169	135 ... 170	11	151183 GRLZ-M5-B		
	G $\frac{1}{8}$	G $\frac{1}{8}$	340	260 ... 420	615	470 ... 760	28	151188 GRLZ- $\frac{1}{8}$ -B		
	G $\frac{1}{4}$	G $\frac{1}{4}$	610	450 ... 820	1,200	885 ... 1,615	59	151195 GRLZ- $\frac{1}{4}$ -B		
	M5	PK-3	83	72 ... 83	140	120 ... 140	10	151184 GRLZ-M5-PK-3-B		
		PK-4	83	76 ... 88	140	125 ... 150	10	151185 GRLZ-M5-PK-4-B		
	G $\frac{1}{8}$	PK-3 ¹⁾	110	100 ... 110	162	145 ... 165	22	151189 GRLZ- $\frac{1}{8}$ -PK-3-B		
		PK-4 ¹⁾	230	190 ... 240	360	295 ... 375	25	151190 GRLZ- $\frac{1}{8}$ -PK-4-B		
		PK-6 ¹⁾	300	210 ... 290	455	320 ... 440	26	151191 GRLZ- $\frac{1}{8}$ -PK-6-B		
	G $\frac{1}{4}$	PK-4 ¹⁾	260	220 ... 260	370	315 ... 370	44	151196 GRLZ- $\frac{1}{4}$ -PK-4-B		
		PK-6 ¹⁾	540	410 ... 585	840	635 ... 910	45	151197 GRLZ- $\frac{1}{4}$ -PK-6-B		
Knurled screw										
	M5	M5	95	76 ... 95	169	135 ... 170	12	151186 GRLZ-M5-RS-B		
	G $\frac{1}{8}$	G $\frac{1}{8}$	340	260 ... 420	615	470 ... 760	30	151192 GRLZ- $\frac{1}{8}$ -RS-B		
	G $\frac{1}{4}$	G $\frac{1}{4}$	610	450 ... 820	1,200	885 ... 1,615	59	151198 GRLZ- $\frac{1}{4}$ -RS-B		

1) Via union nut


One-way flow control valves GRLSA, standard

FESTO

Technical data – Push-in connector QS, metal

One-way flow control function

Exhaust air




- 1 - Flow rate
0 ... 450 l/min
- 2 - Temperature range
-10 ... +60 °C
- 3 - Operating pressure
0.2 ... 10 bar



This one-way flow control valve offers the ideal conditions for optimum and easy setting of the flow rate in a unique design.

There are two setting options:



1 Gradual for preselection of the flow range in 5 stages via rotary switch: A, B, C, D, E



2 Infinitely variable for precision adjustment using internal hex via a scale marked from 0 to 10



General technical data

Valve function	Exhaust air one-way flow control function	
Pneumatic connection 2	G1/8	G1/4
Pneumatic connection 1	QS-6	QS-8
Adjustment component	Rotary knob with scale and internal hex	
Actuation type	Manual	
Type of mounting	Screw-in	
Mounting position	Any	
Nominal tightening torque [Nm]	3.5 ±20%	11 ±10%

Operating and environmental conditions


Operating pressure complete temperature range	[bar]	0.2 ... 10
Operating medium	Compressed air in accordance with ISO 8573-1:2010 [7:4:4]	
Note on operating/pilot medium	Operation with lubricated medium possible (in which case lubricated operation will always be required)	
Ambient temperature	[°C]	-10 ... +60
Temperature of medium	[°C]	-10 ... +60
Storage temperature	[°C]	-10 ... +40

One-way flow control valves GRLSA, standard


Technical data – Push-in connector QS, metal

FESTO


Standard nominal flow rate q_{nN} at 6 → 5 bar
as a function of the position of the flow control screw (scale) n
GRLSA-1/8

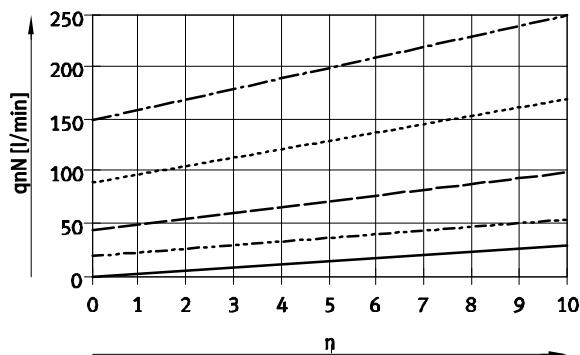


Standard flow rate qn at 6 → 0 bar
as a function of the position of the flow control screw (scale) n
GRLSA-1/8

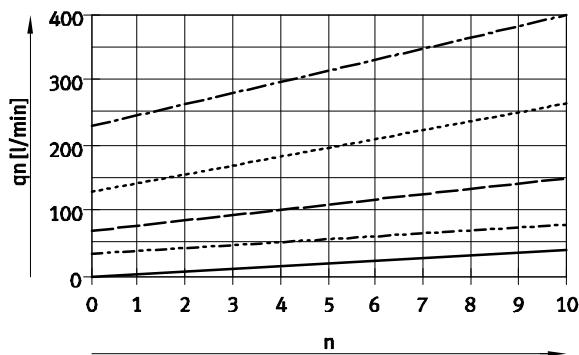

GRLSA-1/4

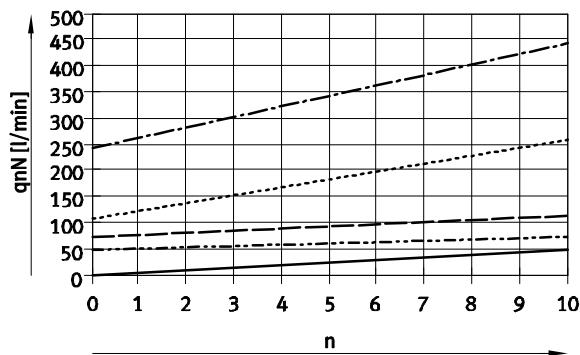

GRLSA-1/4

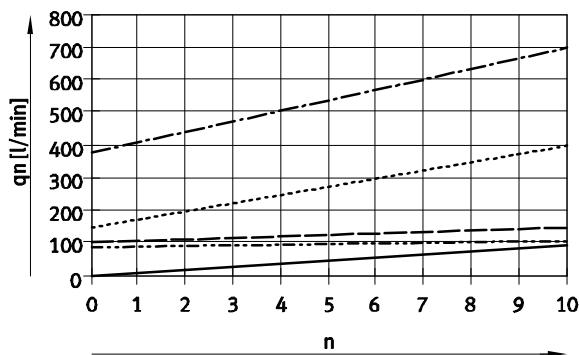


- Stage: A
- - - Stage: B
- - - - Stage: C
- - - - - Stage: D
- - - - - - Stage: E

Flow rate value tolerance: ±20%

Materials

Sectional view

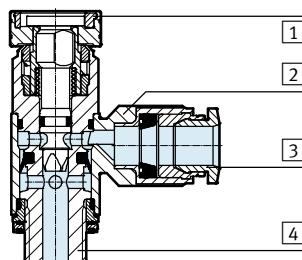

One-way flow control valve

[1] Adjusting screw	PA, reinforced
[2] Swivel connection	Die-cast zinc
[3] Releasing ring	POM
[4] Hollow bolt	Anodised wrought aluminium alloy
- Seals	NBR
Note on materials	RoHS-compliant Free of copper and PTFE

One-way flow control valves GRLSA, standard

FESTO

Technical data – Push-in connector QS, metal

Dimensions

Rotary knob with scale and internal hex

Download CAD data ➔ www.festo.com



Type	Connection D	Tubing O.D. D1	B	B1	B2	H	L max.	L1	L2	L3	=C1	=C2
GRLSA-1/8	G1/8	6	12.5	13.8	15	25.7	36.6	5.1	13.5	2	12	3
GRLSA-1/4	G1/4	8	14.5	17.8	18.8	30.75	46.5	7	17.2	3	15	3

Ordering data – Exhaust air one-way flow control function

Pneumatic connection	Standard nominal flow rate qnN at 6 → 5 bar				Standard flow rate qn at 6 → 0 bar		Weight [g]	Part No. Type		
	in direction of flow control		in non-return direction		in direction of flow control					
	2	1	[l/min]	[l/min]	[l/min]	[l/min]				
Rotary knob with scale and internal hex										
	G1/8	QS-6	0 ... 250	180 ... 310	0 ... 410	430 ... 540	19.5	540661 GRLSA-1/8-QS-6		
	G1/4	QS-8	0 ... 450	390 ... 570	0 ... 700	820 ... 930	34.8	540662 GRLSA-1/4-QS-8		


One-way flow control valves VFOC, standard

Technical data – Push-in connector QS, metal

FESTO

One-way flow control function

Supply air



- - Flow rate
0 ... 270 l/min
- - Temperature range
-10 ... +60 °C
- - Operating pressure
0.2 ... 10 bar



General technical data


Valve function	Supply air one-way flow control function	
Pneumatic connection 2	Push-in sleeve QS-4	Push-in sleeve QS-6
Pneumatic connection 1	QS-4	QS-6
Note on the pneumatic connection 2	Only suitable for push-in connector QS from Festo	
Adjustment component	Slotted head screw	
Actuation type	Manual	
Type of mounting	Plug-in, with push-in sleeve	
Mounting position	Any	

Operating and environmental conditions

Operating pressure [bar]	0.2 ... 10
Operating medium	Compressed air in accordance with ISO 8573-1:2010 [7:4:4]
Note on operating/pilot medium	Operation with lubricated medium possible (in which case lubricated operation will always be required)
Ambient temperature [°C]	-10 ... +60
Temperature of medium [°C]	-10 ... +60
Storage temperature [°C]	-10 ... +40

Standard nominal flow rate q_{nN} at 6 → 5 bar


as a function of turns of the adjusting screw n

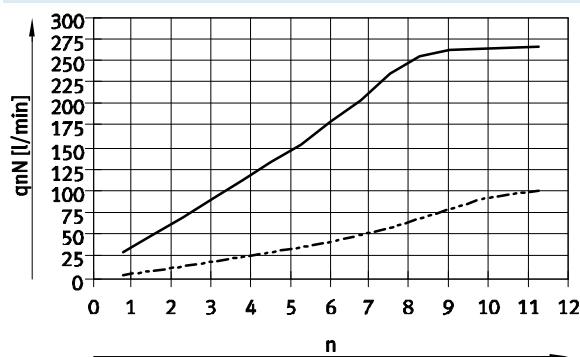

— QS-6
- - - QS-4

Standard flow rate q_n at 6 → 0 bar

as a function of turns of the adjusting screw n

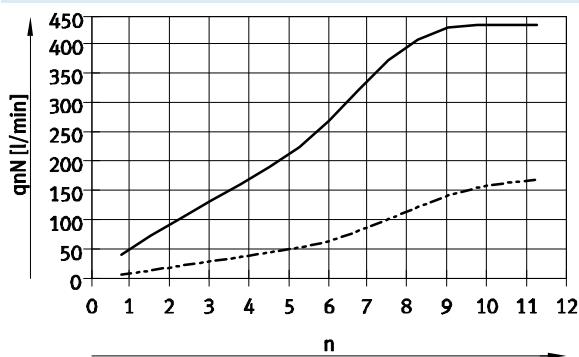

— QS-6
- - - QS-4


One-way flow control valves VFOC, standard

FESTO

Technical data – Push-in connector QS, metal

Materials

Sectional view

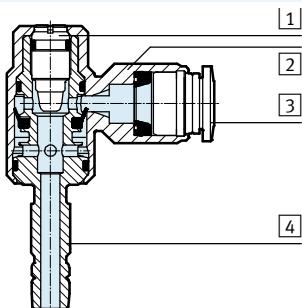


One-way flow control valve

[1] Adjusting screw	High-alloy stainless steel
[2] Swivel connection	Die-cast zinc
[3] Releasing ring	POM
[4] Hollow bolt	Black anodised wrought aluminium alloy
- Seals	NBR
Note on materials	RoHS-compliant

Dimensions

Slotted head screw

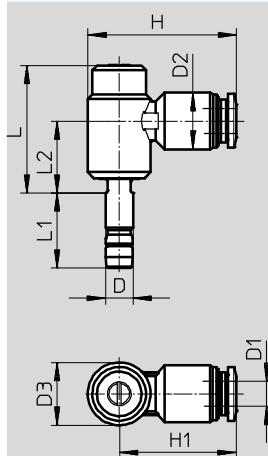

Download CAD data → www.festo.com

Note
The push-in sleeves of the one-way flow control valves VFOC are exclusively matched to push-in fittings QS from Festo
→ www.festo.com/catalogue.
This combination alone guarantees a secure grip in the push-in fitting.

Type	Push-in sleeve Ø D	Tubing O.D. D1	D2 Ø	D3 Ø	H	H1	L	L1	L2
VFOC-S-S4-Q4	4	4	10	8.9	24.7	20.3	23.2	14.8	13.2
VFOC-S-S6-Q6	6	6	12.5	13.8	32.6	25.7	28	16.5	15.8

Ordering data – Supply air one-way flow control function

Pneumatic connection	Standard nominal flow rate qnN at 6 → 5 bar		Standard flow rate qn at 6 → 0 bar		Weight [g]	Part No.	Type
	in direction of flow control	in non-return direction	in direction of flow control	in non-return direction			
	2	1	[l/min]	[l/min]			

Slotted head screw

	Push-in sleeve QS-4	QS-4	0 ... 100	60 ... 100	0 ... 170	130 ... 160	9.2	559723	VFOC-S-S4-Q4
	Push-in sleeve QS-6	QS-6	0 ... 270	170 ... 260	0 ... 430	330 ... 400	21.6	559724	VFOC-S-S6-Q6


One-way flow control valves VFOH-LE, standard

Technical data – Push-in connector QS, nickel-plated metal

FESTO

One-way flow control function

Exhaust air



- - Flow rate
180 ... 530 l/min
- - Temperature range
0 ... +150 °C
- - Operating pressure
0.2 ... 10 bar

- 360° orientable around the screw-in axis after mounting



General technical data

Valve function	Exhaust air one-way flow control function	
Pneumatic connection 2	G1/8	G1/4
Pneumatic connection 1	QS-4, QS-6, QS-8	QS-8, QS-10
Adjustment element	External hex	
Actuation type	Manual	
Type of mounting	Screw-in	
Mounting position	Any	
Nominal tightening torque [Nm]	3 ±10%	5 ±10%

Operating and environmental conditions


Operating pressure complete [bar]	0.2 ... 10
temperature range	
Operating medium	Compressed air in accordance with ISO 8573-1:2010 [7:4:4]
Note on operating/pilot medium	Operation with lubricated medium possible (in which case lubricated operation will always be required)
Ambient temperature [°C]	0 ... +150
Temperature of medium [°C]	0 ... +150
Storage temperature [°C]	-10 ... +150
Corrosion resistance class CRC ¹⁾	3

1) CRC3: Corrosion resistance class to Festo standard 940 070

Components with heavy corrosion exposure. Externally visible components in direct contact with normal industrial atmosphere or media such as solvents and cleaning agents, where the surface requirement is predominantly functional.


Standard nominal flow rate q_{nN} at 6 → 5 bar as a function of turns of the adjusting screw n

VFOH-LE-A-G18

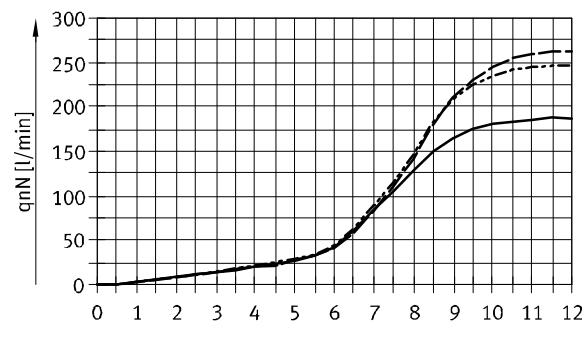

— QS-4
- - - QS-6
- · - QS-8

VFOH-LE-A-G14

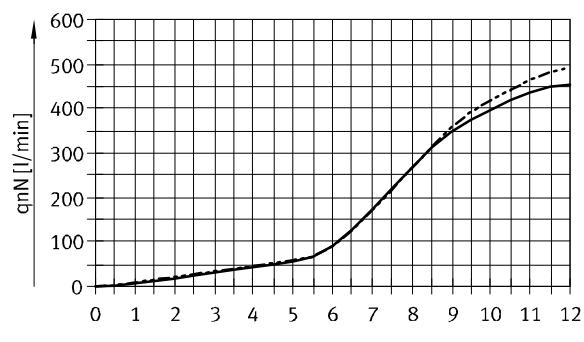


— QS-8
- - - QS-10

One-way flow control valves VFOH-LE, standard

Technical data – Push-in connector QS, nickel-plated metal

Materials

Sectional view

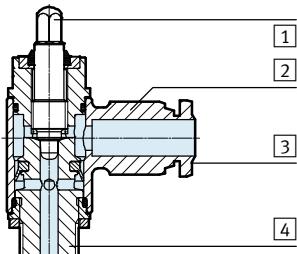


One-way flow control valve

[1] Adjusting screw	High-alloy stainless steel
[2] Swivel connection	Nickel-plated brass
[3] Releasing ring	Nickel-plated brass
[4] Hollow bolt	Wrought aluminium alloy
- Seals	FPM
Note on materials	RoHS-compliant Free of copper and PTFE

Dimensions

External hex

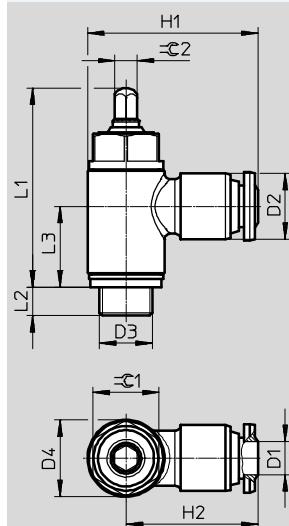

Download CAD data → www.festo.com

Type	Connection D3	Tubing O.D. D1	D2 ∅	D4 ∅	H1	H2	L1	L2	L3	=C 1	=C 2
VFOH-LE-A-G18	G1/8	4	10.5	14	28	21	36.3	5.2	14.8	12	4
		6	12		31	24					
		8	14		32	25					
VFOH-LE-A-G14	G1/4	8	14	18	36	27	39.9	6.1	17.5	15	5
		10	17.7		41	32					

Ordering data – Exhaust air one-way flow control function

Pneumatic connection	Standard nominal flow rate qnN at 6 → 5 bar		Standard flow rate qn at 6 → 0 bar		Weight [g]	Part No.	Type			
	in direction of flow control		in non-return direction							
	2	1	[l/min]	[l/min]						
External hex										

	G1/8	QS-4	180	103 ... 188	250	270 ... 300	25	578797	VFOH-LE-A-G18-Q4
	QS-6	255	111 ... 280	370	330 ... 390	578798	VFOH-LE-A-G18-Q6		
	QS-8	275	132 ... 307	400	330 ... 410	578799	VFOH-LE-A-G18-Q8		
	G1/4	QS-8	530	402 ... 578	720	610 ... 760	37	578800	VFOH-LE-A-G14-Q8
		QS-10	520	345 ... 535	840	635 ... 790		578801	VFOH-LE-A-G14-Q10


One-way flow control valves GRLA, standard

Technical data – Push-in connector QS, polymer

FESTO

One-way flow control function

Exhaust air



- - Flow rate
520 ... 650 l/min
- - Temperature range
-10 ... +60 °C
- - Operating pressure
0.2 ... 10 bar

- Can be swivelled 360° around the screw-in axis after mounting



General technical data

Valve function	Exhaust air one-way flow control function		
Pneumatic connection 2	G1/8	G1/4	G3/8
Pneumatic connection 1	QS-6, QS-8	QS-6, QS-8	QS-6, QS-8
Adjustment component	Knurled screw		
Actuation type	Manual		
Type of mounting	Screw-in		
Mounting position	Any		
Nominal tightening torque [Nm]	3.5 ±20%	11 ±10%	12.5 ±20%
Perm. actuation torque for regulating screw [Nm]	0.4		


Operating and environmental conditions

Operating pressure complete temperature range	0.2 ... 10
Operating medium	Compressed air in accordance with ISO 8573-1:2010 [7:4:4]
Note on operating/pilot medium	Operation with lubricated medium possible (in which case lubricated operation will always be required)
Ambient temperature [°C]	-10 ... +60
Temperature of medium [°C]	-10 ... +60
Storage temperature [°C]	-10 ... +40
Corrosion resistance class CRC ¹)	2


1) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.

Standard nominal flow rate q_{nN} at 6 → 5 bar
as a function of turns of the adjusting screw n

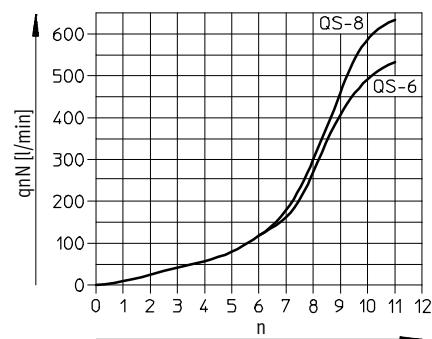

Standard flow rate q_n at 6 → 0 bar
as a function of turns of the adjusting screw n

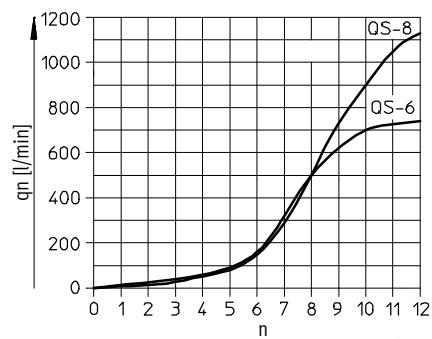


One-way flow control valves GRLA, standard

FESTO

Technical data – Push-in connector QS, polymer

Materials

Sectional view

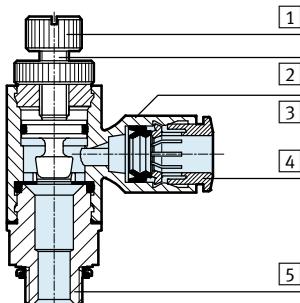

One-way flow control valve

[1] Knurled head Wrought aluminium alloy

[2] Regulating screw Brass

[3] Swivel connection PBT, reinforced

[4] Releasing ring POM

[5] Threaded plug Wrought aluminium alloy


– Seals TPE-U(PU)

NBR

Note on materials RoHS-compliant

Dimensions

Knurled screw

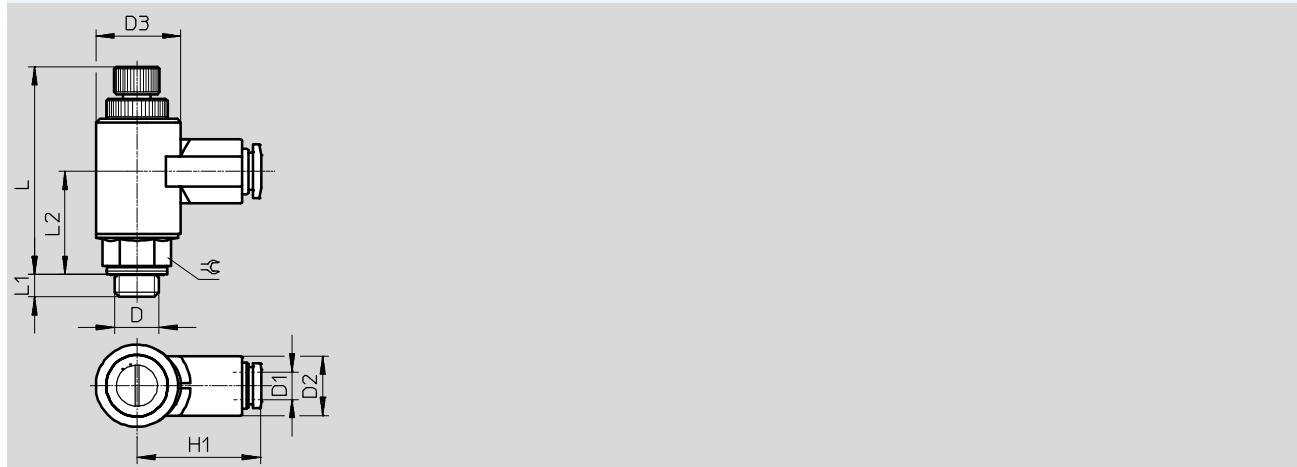

Download CAD data → www.festo.com

Type	Connection D	Tubing O.D. D1	D2 ∅	D3	H1	L max.	L1	L2	=C
GRLA-1/8	G1/8	6	13.0 ±0.25	17.9 -0.1	27.2	48	4.9	22.6	13
		8	16.8 ±0.4		35.4				
GRLA-1/4	G1/4	6	13.0 ±0.25	17.9 -0.1	27.2	48	5.8	22.3	17
		8	16.8 ±0.4		35.4				
GRLA-3/8	G3/8	6	13.0 ±0.25	17.9 -0.1	27.2	48	6.8	22.3	19
		8	16.8 ±0.4		35.4				

Ordering data – Exhaust air one-way flow control function

Pneumatic connec-tion	Standard nominal flow rate qnN at 6 → 5 bar			Standard flow rate qn at 6 → 0 bar		Weight [g]	Part No.	Type			
	in direction of flow control		in direction of flow control								
	2	1	[l/min]	[l/min]	[l/min]						

Knurled screw



	G1/8	QS-6	520	400 ... 550	720	600 ... 750	25	162965	GRLA-1/8-QS-6-RS-B
	QS-8	650	600 ... 750	1,080	800 ... 1,250	162966	GRLA-1/8-QS-8-RS-B		
	G1/4	QS-6	520	400 ... 550	720	600 ... 750	30	162967	GRLA-1/4-QS-6-RS-B
		650	600 ... 750	1,130	800 ... 1,250	162968	GRLA-1/4-QS-8-RS-B		
	G3/8	QS-6	530	400 ... 550	720	600 ... 750	40	162969	GRLA-3/8-QS-6-RS-B
		650	600 ... 750	1,130	800 ... 1,250	162970	GRLA-3/8-QS-8-RS-B		

One-way flow control valves GRLA/GRLZ/GRGA/GRGZ, mini

Technical data – Push-in connector QS, metal

One-way flow control function

Exhaust air Supply air



- - Flow rate
40 ... 48 l/min
- - Temperature range
-10 ... +60 °C
- - Operating pressure
0.2 ... 10 bar

- Low flow: precision adjustment for low speed



General technical data – GRLA/GRGA

Valve function	Exhaust air one-way flow control function	
Pneumatic connection 2	M3	M5
Pneumatic connection 1	QS-3	QS-3, QS-4
Adjustment component	Slotted head screw	
Type of mounting	Screw-in	
Mounting position	Any	
Max. tightening torque [Nm]	0.3	1.5

General technical data – GRLZ/GRGZ

Valve function	Supply air one-way flow control function	
Pneumatic connection 2	M3	M5
Pneumatic connection 1	QS-3	QS-3, QS-4
Adjustment component	Slotted head screw	
Type of mounting	Screw-in	
Mounting position	Any	
Max. tightening torque [Nm]	0.3	1.5

Operating and environmental conditions


Operating pressure [bar]	0.2 ... 10
Operating medium	Compressed air in accordance with ISO 8573-1:2010 [7:4:4]
Note on operating/pilot medium	Operation with lubricated medium possible (in which case lubricated operation will always be required)
Ambient temperature [°C]	-10 ... +60
Temperature of medium [°C]	-10 ... +60
Storage temperature [°C]	-10 ... +40
Certification	GRLA: Germanischer Lloyd

One-way flow control valves GRLA/GRLZ/GRGA/GRGZ, mini


FESTO

Technical data – Push-in connector QS, metal


Standard nominal flow rate q_{nN} at 6 → 5 bar
as a function of turns of the adjusting screw n
GRLA/GRLZ/GRGA/GRGZ-M3

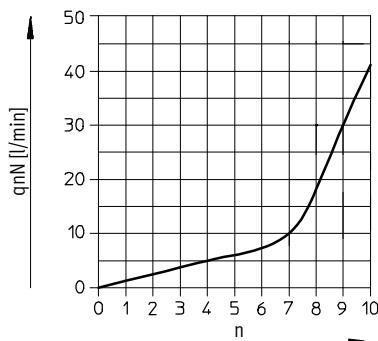


Standard flow rate q_n at 6 → 0 bar
as a function of turns of the adjusting screw n
GRLA/GRLZ/GRGA/GRGZ-M3

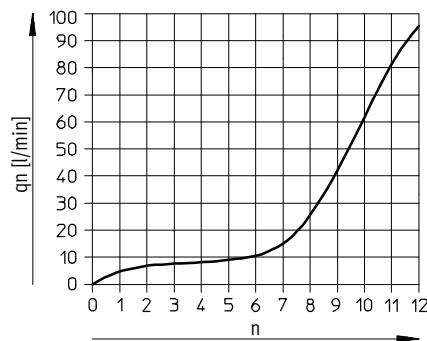

GRLA/GRLZ-M5

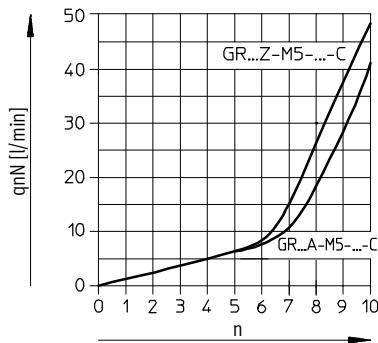


GRLA/GRLZ-M5

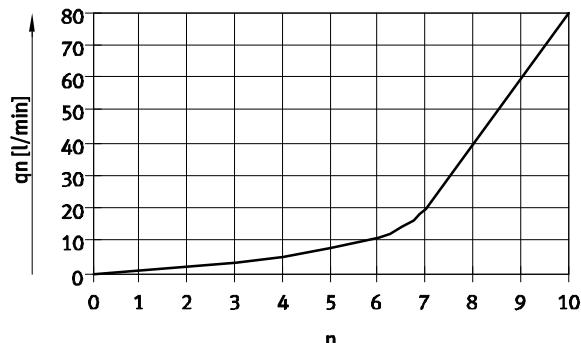

Materials

Sectional view

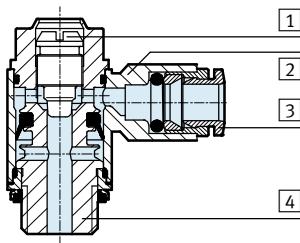

One-way flow control valve

[1] Adjusting screw	Brass
[2] Swivel connection	Die-cast zinc
[3] Releasing ring	POM
[4] Threaded plug	Nickel-plated brass
- Seals	NBR
Note on materials	RoHS-compliant


One-way flow control valves GRLA/GRLZ/GRGA/GRGZ, mini

FESTO


Technical data – Push-in connector QS, metal

Dimensions

GRLA/GRLZ, elbow outlet

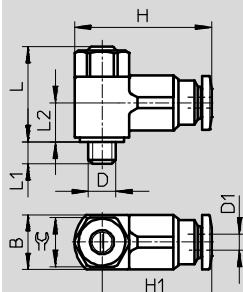

GRGA/GRGZ, parallel outlet

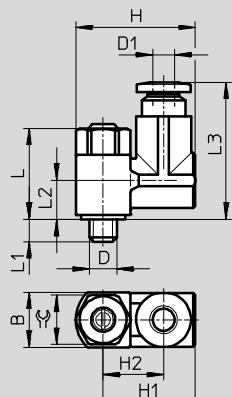

Download CAD data → www.festo.com

Type	Connection D	Nominal size [mm]	Tubing O.D. D1	B	H	H1	H2	L max.	L1	L2	L3	=C
GRLA/GRLZ	M3	1.4	3	8 -0.15	20	15.8	-	16.6	2.3 +0.15/-0.3	7	-	7
	M5	1.4	3	9.8 -0.15	22.4	18.4		17.7	3.1 +0.15/-0.35	7.3		
		1.4	4	9.8 -0.15	22.2	18.2		17.7	3.1 +0.15/-0.35	7.3		
GRGA/GRGZ	M3	1.4	3	8 -0.15	18	14	9.25	16.6	2.3 +0.15/-0.3	7.5	22	7

Ordering data – Exhaust air one-way flow control function

	Pneumatic connection		Standard nominal flow rate qnN at 6 → 5 bar		Standard flow rate qn at 6 → 0 bar		Weight [g]	Part No.	Type
			in direction of flow control	in non-return direction	in direction of flow control	in non-return direction			
	2	1	[l/min]	[l/min]	[l/min]	[l/min]			
Slotted head screw									
	M3	QS-3	41	27 ... 50	95	75 ... 110	7	175041	GRLA-M3-QS-3
	M5	QS-3	40	46 ... 70	80	90 ... 140	9	175053	GRLA-M5-QS-3-LF-C
		QS-4	40	50 ... 75	80	100 ... 150	9	175056	GRLA-M5-QS-4-LF-C
	M3	QS-3	41	27 ... 50	95	75 ... 110	14	175044	GRGA-M3-QS-3

Ordering data – Supply air one-way flow control function

	Pneumatic connection		Standard nominal flow rate qnN at 6 → 5 bar		Standard flow rate qn at 6 → 0 bar		Weight [g]	Part No.	Type
			in direction of flow control	in non-return direction	in direction of flow control	in non-return direction			
	2	1	[l/min]	[l/min]	[l/min]	[l/min]			
Slotted head screw									
	M3	QS-3	41	27 ... 44	95	75 ... 100	7	175043	GRLZ-M3-QS-3
	M5	QS-3	48	36 ... 52	80	60 ... 90	9	175055	GRLZ-M5-QS-3-LF-C
		QS-4	48	40 ... 65	80	65 ... 110	9	175058	GRLZ-M5-QS-4-LF-C
	M3	QS-3	41	27 ... 44	95	75 ... 100	14	175046	GRGZ-M3-QS-3


One-way flow control valves GRLA/GRLZ, mini

FESTO

Technical data – Female thread, metal

One-way flow control function

Exhaust air Supply air



- - Flow rate
0 ... 18 l/min
- - Temperature range
-10 ... +60 °C
- - Operating pressure
0.2 ... 10 bar



General technical data – GRLA

Valve function	Exhaust air one-way flow control function
Pneumatic connection 2	M3
Pneumatic connection 1	M3
Adjustment component	Slotted head screw
Type of mounting	Screw-in
Mounting position	Any
Max. tightening torque [Nm]	0.3


General technical data – GRLZ

Valve function	Supply air one-way flow control function
Pneumatic connection 2	M3
Pneumatic connection 1	M3
Adjustment component	Slotted head screw
Type of mounting	Screw-in
Mounting position	Any
Max. tightening torque [Nm]	0.3


Operating and environmental conditions

Operating pressure [bar]	0.2 ... 10
Operating medium	Compressed air in accordance with ISO 8573-1:2010 [7:4:4]
Note on operating/pilot medium	Operation with lubricated medium possible (in which case lubricated operation will always be required)
Ambient temperature [°C]	-10 ... +60
Temperature of medium [°C]	-10 ... +60
Storage temperature [°C]	-10 ... +40
Certification	GRLA: Germanischer Lloyd

Standard nominal flow rate q_{N} at 6 → 5 bar
as a function of turns of the adjusting screw n

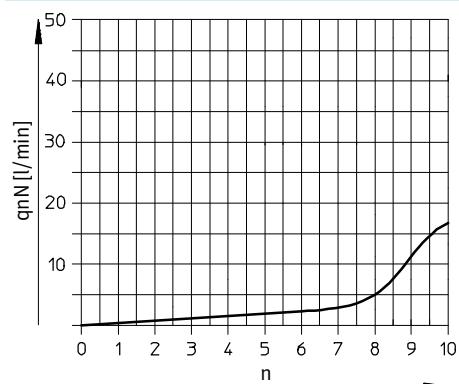

Standard flow rate q_n at 6 → 0 bar
as a function of turns of the adjusting screw n

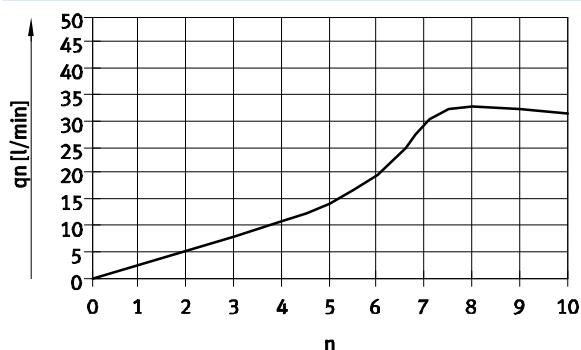


One-way flow control valves GRLA/GRLZ, mini

Technical data – Female thread, metal

FESTO

Materials

Sectional view

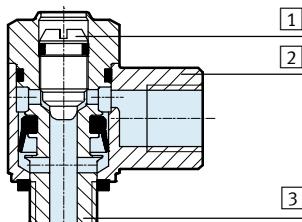


One-way flow control valve

[1] Adjusting screw	Brass
[2] Swivel connection	Die-cast zinc
[3] Threaded plug	Nickel-plated brass
- Seals	NBR
Note on materials	RoHS-compliant

Dimensions

Slotted head screw

Download CAD data → www.festo.com

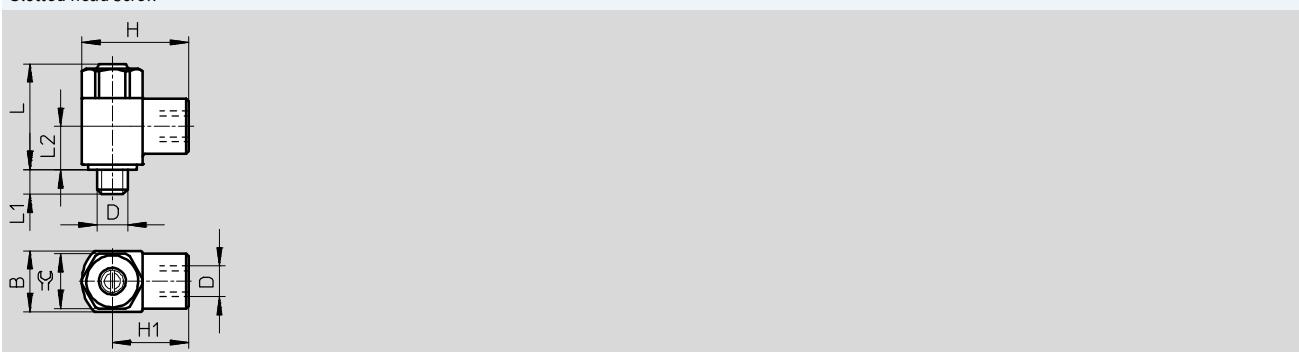

Type	Connection D	Nominal size [mm]	B	H	H1	L max.	L1	L2	=C
GRLA/GRLZ	M3	0.8	5 -0.1	9	6.5	13.3	2.5 +0.15/-0.3	6.4	4.5

Ordering data – Exhaust air one-way flow control function

Pneumatic connection	Standard nominal flow rate qnN at 6 → 5 bar				Standard flow rate qn at 6 → 0 bar		Weight [g]	Part No.	Type			
	in direction of flow control		in non-return direction		in direction of flow control							
	2	1	[l/min]	[l/min]	[l/min]	[l/min]						

Slotted head screw

	M3	M3	18	18 ... 20	33	33 ... 37	2	175038	GRLA-M3
--	----	----	----	-----------	----	-----------	---	--------	---------

Ordering data – Supply air one-way flow control function

Pneumatic connection	Standard nominal flow rate qnN at 6 → 5 bar				Standard flow rate qn at 6 → 0 bar		Weight [g]	Part No.	Type			
	in direction of flow control		in non-return direction		in direction of flow control							
	2	1	[l/min]	[l/min]	[l/min]	[l/min]						

Slotted head screw

	M3	M3	18	18 ... 20	33	33 ... 37	2	175040	GRLZ-M3
--	----	----	----	-----------	----	-----------	---	--------	---------


One-way flow control valves CRGRLA, corrosion-resistant

FESTO

Technical data – Female thread, stainless steel

One-way flow control function

Exhaust air



- - Flow rate
95 ... 2,100 l/min
- - Temperature range
-20 ... +80 °C
- - Operating pressure
0.2 ... 10 bar



General technical data

Valve function	Exhaust air one-way flow control function				
Pneumatic connection 2	M5	G1/8	G1/4	G3/8	G1/2
Pneumatic connection 1	M5	G1/8	G1/4	G3/8	G1/2
Adjustment component	Slotted head screw				
Type of mounting	Screw-in				
Mounting position	Any				
Max. tightening torque [Nm]	1.5	6	11	20	40
Perm. actuation torque for regulating screw [Nm]	0.2	0.5	1.5	2	3

Note: This product conforms to ISO 1179-1 and to ISO 228-1

Operating and environmental conditions


Pneumatic connection 2	M5	G1/8	G1/4	G3/8	G1/2
Operating pressure [bar]	0.2 ... 10	0.3 ... 10			
Operating medium	Compressed air in accordance with ISO 8573-1:2010 [7:4:4]				
Note on operating/pilot medium	Operation with lubricated medium possible (in which case lubricated operation will always be required)				
Ambient temperature [°C]	-20 ... +80				
Temperature of medium [°C]	-10 ... +60				
Storage temperature [°C]	-10 ... +40				
Corrosion resistance class CRC ¹⁾	3				
Certification	Germanischer Lloyd				

1) Corrosion resistance class 3 according to Festo standard 940 070

Components subject to high corrosion stress. External visible parts in direct contact with industrial atmospheres or media such as solvents and cleaning agents, with a predominantly functional requirement for the surface.


Standard nominal flow rate q_{nN} at 6 → 5 bar as a function of turns of the adjusting screw n

CRGRLA-M5, CRGRLA-1/8

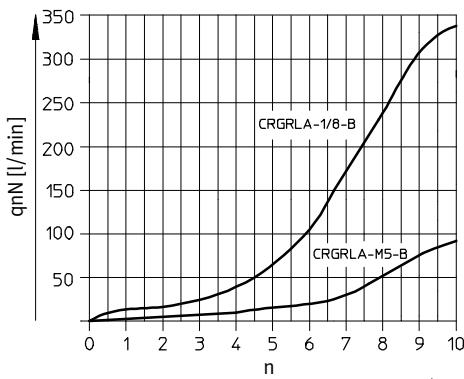

Standard flow rate q_n at 6 → 0 bar as a function of turns of the adjusting screw n

CRGRLA-M5, CRGRLA-1/8

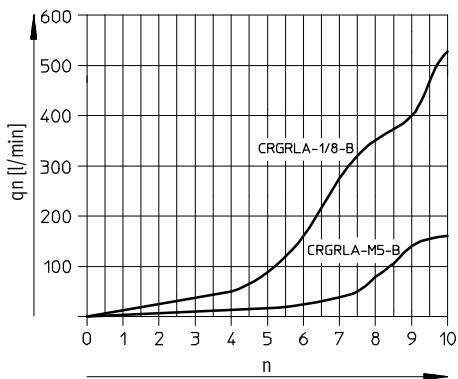

One-way flow control valves CRGRLA, corrosion-resistant


Technical data – Female thread, stainless steel

FESTO

Standard nominal flow rate q_{nN} at 6 → 5 bar

as a function of turns of the adjusting screw n


CRGRLA-1/4, CRGRLA-3/8, CRGRLA-1/2

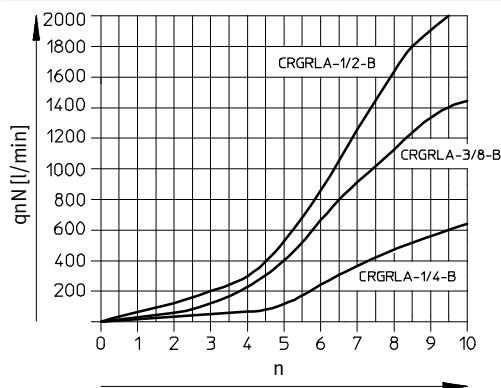

Standard flow rate q_n at 6 → 0 bar


as a function of turns of the adjusting screw n

CRGRLA-1/4, CRGRLA-3/8, CRGRLA-1/2

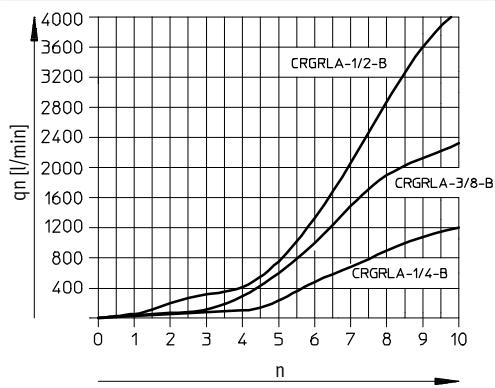

Materials

Sectional view

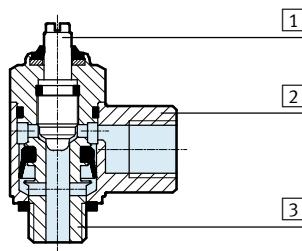


One-way flow control valve

[1]	Regulating screw	High-alloy stainless steel
[2]	Swivel connection	High-alloy stainless steel
[3]	Hollow bolt	High-alloy steel
-	Seals	FPM, PVC
Note on materials		RoHS-compliant


Dimensions

CRGRLA-M5

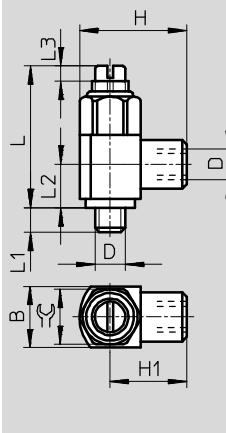

Download CAD data → www.festo.com

CRGRLA-1/8, CRGRLA-1/4, CRGRLA-3/8, CRGRLA-1/2

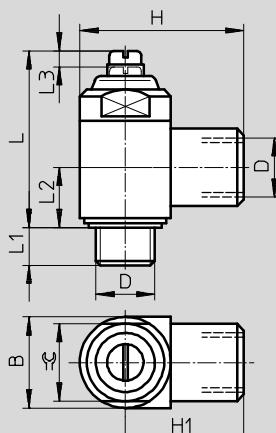


Type	Connection D	Nominal size [mm]	B	H	H1	L	L1	L2	L3	=C
CRGRLA-M5	M5	2	10 -0.25	17.5 ±0.3	12.5	23.2	4	7.1	2.5	9
CRGRLA-1/8	G1/8	4	16 -0.4	28 +0.4/-0.3	20	33.7	5.5	10.3	3.5	14
CRGRLA-1/4	G1/4	6	20 -0.3	36 +0.4/-0.2	26	38.8	6.5	13.2	3.5	17
CRGRLA-3/8	G3/8	8.5	25 -0.3	41 +0.4/-0.2	28.5	48.5	7.5	15.4	5	22
CRGRLA-1/2	G1/2	10.6	32 -0.4	53 ±0.5	37	62.2	9	18.9	7.5	27

Note: This product conforms to ISO 1179-1 and to ISO 228-1

One-way flow control valves CRGRLA, corrosion-resistant

FESTO

Technical data – Female thread, stainless steel


Ordering data – Exhaust air one-way flow control function								
Pneumatic connection		Standard nominal flow rate qnN at 6 → 5 bar		Standard flow rate qn at 6 → 0 bar		Weight [g]	Part No. Type	
		in direction of flow control	in non-return direction	in direction of flow control	in non-return direction			
2	1	[l/min]	[l/min]	[l/min]	[l/min]			
Slotted head screw								
	M5	M5	95	77 ... 95	165	140 ... 150	10.2	161403 CRGRLA-M5-B
	G1/8	G1/8	340	260 ... 420	580	530 ... 590	37.8	161404 CRGRLA-1/8-B
	G1/4	G1/4	610	450 ... 820	1,265	1,030 ... 1,345	71.6	161405 CRGRLA-1/4-B
	G3/8	G3/8	1,450	970 ... 1,600	2,515	2,095 ... 2,665	126.9	161406 CRGRLA-3/8-B
	G1/2	G1/2	2,100	1,550 ... 2,200	4,265	3,550 ... 4,325	262.3	161407 CRGRLA-1/2-B

One-way flow control valves GRXA, function combination

Technical data – Push-in connector QS, metal

One-way flow control function


Exhaust air



- - Flow rate
130 ... 280 l/min
- - Temperature range
-10 ... +60 °C
- - Operating pressure
0.5 ... 10 bar



Function example:

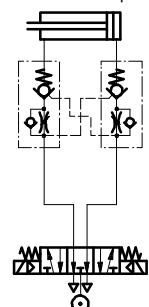

The function combination consists of a one-way flow control valve and a piloted non-return valve. Exhaust air flow control is active as long as a pilot signal from pneumatic connection 21 is applied. If no pilot signal is applied, the valve shuts off the exhaust air. The compressed air flows unthrottled through the non-return valve in the supply air direction.

- Stop function and speed setting in one housing
- Swivel pilot connection 21 perpendicular to screw-in direction
- Additional pilot connection 1 for crossover interconnection, e.g. for stop function with pressure failure

➔ Function example

General technical data		
Valve function	Exhaust air one-way flow control function	
Pneumatic connection 2	G1/8	G1/4
Pneumatic connection 1	QS-4, QS-6	QS-6, QS-8
Pneumatic connection 21/additional pilot connection 1	QS-4	QS-4
Adjustment component	Slotted head screw	
Actuation type	Pneumatic	
Type of mounting	Screw-in, via male thread	
Mounting position	Any	
Switching time	Off [ms]	44
	On [ms]	6
Nominal tightening torque	[Nm]	3.5 ±10% 11 ±10%

Operating and environmental conditions		
Operating pressure complete temperature range	[bar]	0.5 ... 10
Pilot pressure p21	[bar]	2 ... 10
Operating/pilot medium	Compressed air in accordance with ISO 8573-1:2010 [7:4:4]	
Note on operating/pilot medium	Operation with lubricated medium possible (in which case lubricated operation will always be required)	
Ambient temperature	[°C]	-10 ... +60
Temperature of medium	[°C]	-10 ... +60
Storage temperature	[°C]	-10 ... +40


- - Note	
Additional measures are required for use in safety-related applications; in Europe, for example, the standards listed under the EC Machinery Directive must be observed.	Without additional measures in accordance with statutory minimum requirements, the product is not suitable for use in safety-related sections of control systems.

One-way flow control valves GRXA, function combination


FESTO

Technical data – Push-in connector QS, metal


Standard nominal flow rate q_{nN} at 6 → 5 bar
as a function of turns of the adjusting screw n

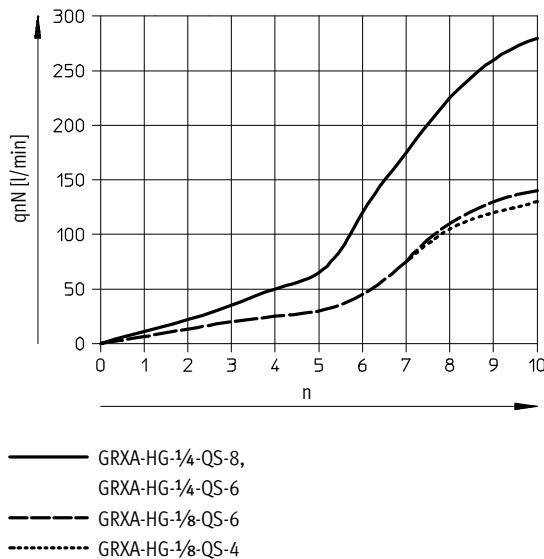

Standard flow rate q_n at 6 → 0 bar
as a function of turns of the adjusting screw n

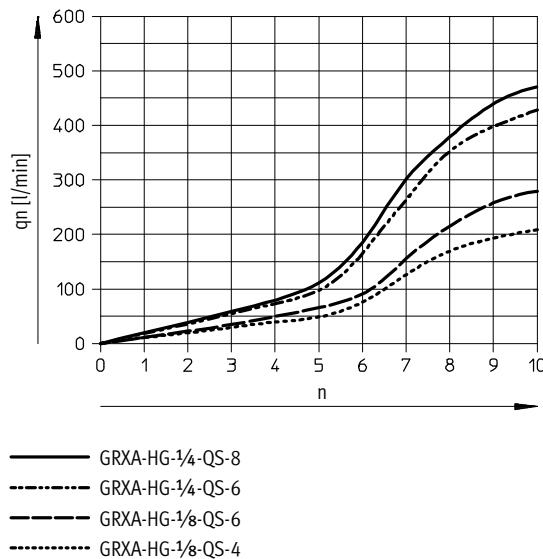


Minimum pilot pressure p_{21} as a function of operating pressure p_1

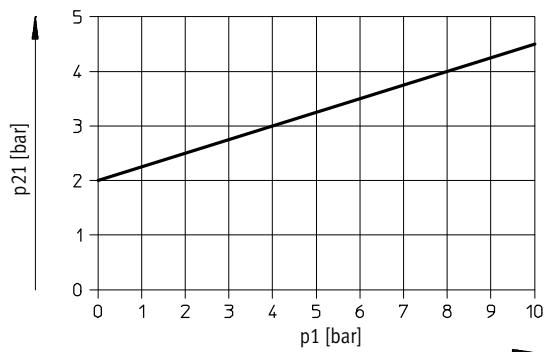

Materials

Sectional view

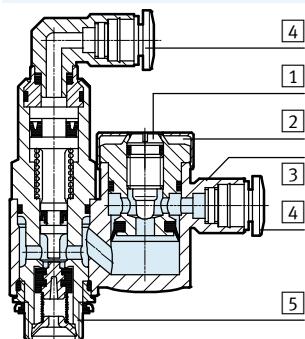

One-way flow control valve

[1] Adjusting screw	Brass
[2] Cap	Anodised wrought aluminium alloy
[3] Swivel connection	POM
[4] Releasing ring	POM
[5] Hollow bolt	Anodised wrought aluminium alloy
- Seals	NBR
Note on materials	RoHS-compliant

One-way flow control valves GRXA, function combination


Technical data – Push-in connector QS, metal

FESTO

Dimensions

Slotted head screw

Download CAD data → www.festo.com

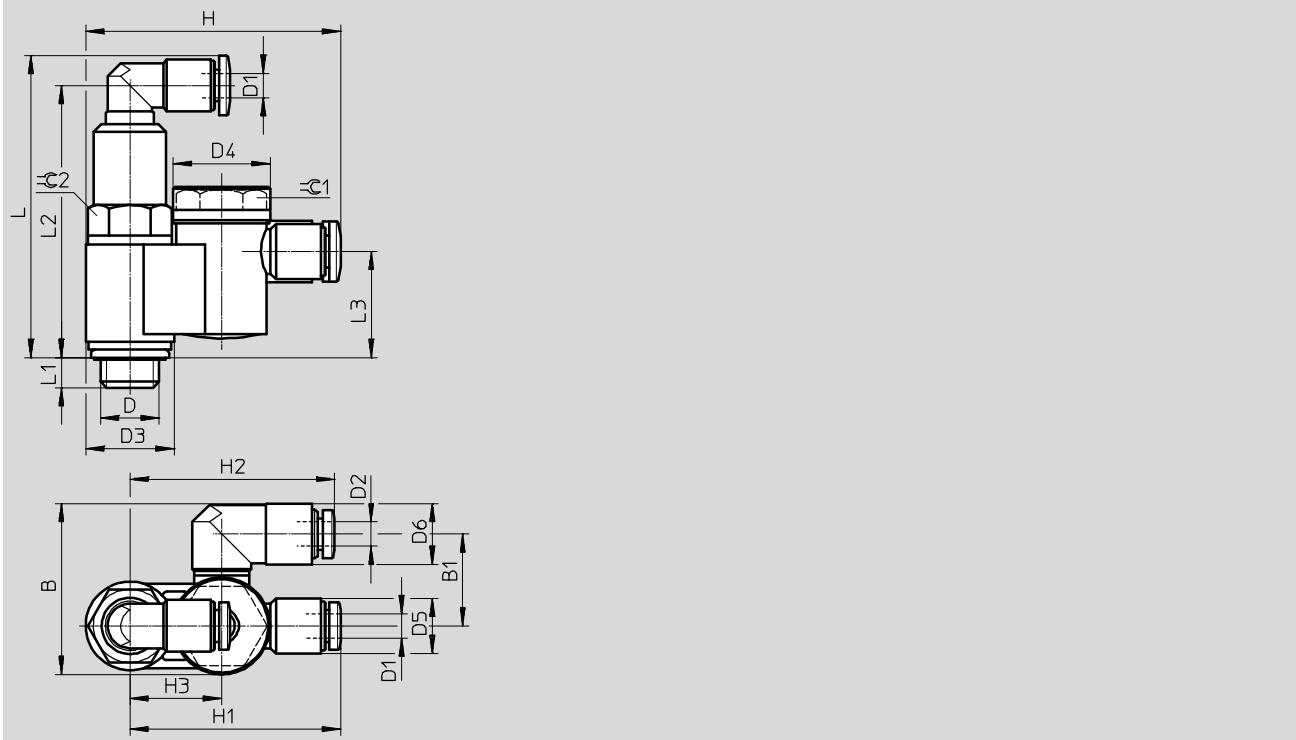

Type	Connection	Tubing O.D.		B	B1	D3 ∅	D4 ∅	D5 ∅	D6 ∅	H	H1	H2	H3	L	L1	L2	L3	=C1	=C2
	D	D1	D2																
GRXA-HG-1/8	G1/8	4	4	28	15	14.5	15.9	9	10	41.8	34.5	33.5	15	49.5	4.9	44.6	17.4	13	12
		4	6	31.5	17.3				12.5	41.8		34.5							
GRXA-HG-1/4	G1/4	4	6	36.1	19.5	19	20.6	9	12.5	52.2	42.7	40.5	21	56.3	5.6	51.4	21.1	17	16
		4	8	40.3	21.5				17	58.2		48.7							

Ordering data – Exhaust air one-way flow control function

Pneumatic connection	Standard nominal flow rate qnN at 6 → 5 bar				Standard flow rate qn at 6 → 0 bar				Weight [g]	Part No.	Type			
	in direction of flow control		in non-return direction		in direction of flow control		in non-return direction							
	D1	D2	[l/min]	[l/min]	[l/min]	[l/min]	[l/min]	[l/min]						
Slotted head screw														
	G1/8	QS-4	130	100 ... 140 100 ... 140 ¹⁾	210	220 ... 250 230 ... 260 ¹⁾	28.2	525667	GRXA-HG-1/8-QS-4					
		QS-6	140	120 ... 160 115 ... 165 ¹⁾	280	260 ... 300 270 ... 300 ¹⁾	28.2	525668	GRXA-HG-1/8-QS-6					
	G1/4	QS-6	280	180 ... 260 200 ... 270 ¹⁾	430	410 ... 470 430 ... 490 ¹⁾	58.8	525669	GRXA-HG-1/4-QS-6					
		QS-8	280	190 ... 260 200 ... 280 ¹⁾	470	440 ... 500 460 ... 520 ¹⁾	58.8	525670	GRXA-HG-1/4-QS-8					

1) Unactuated