



Size	
Length(L)	12.50mm ±0.30mm
Width(W)	12.50mm ±0.30mm
Thickness   Height	7.50mm ±0.35mm
Recommended Land Pattern (A)	2.60mm Nom.
Recommended Land Pattern (B)	8.50mm Nom.
Recommended Land Pattern (C)	3.20mm Nom.

Electrical Characteristics		
Inductance	220μH ±20% at 1kHz	
Rated Current (L Change) [Typ.]		
Rated Current (L Change) [Max.]	1.3A (10% Down)	
Rated Current (Temperature Rise) [Typ.]	1.3A (40°C Rise)	
Rated Current (Temperature Rise) [Max.]		
DC Resistance [Typ.]	258mΩ	
DC Resistance [Max.]	310mΩ	
Self Resonant Frequency [Min.]		
Self Resonant Frequency [Typ.]		
Q [Min.]		
Q [Typ.]		

Other		
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105°C	
Soldering Method	Reflow	
	Iron Soldering	
AEC-Q200	No	
Packing	Blister (Plastic)Taping [330mm Reel]	
Package Quantity	500pcs	
Weight	3.6g	

<sup>!</sup> Images are for reference only and show exemplary products.

<sup>!</sup> This PDF document was created based on the data listed on the TDK Corporation website.


<sup>!</sup> All specifications are subject to change without notice.











### Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

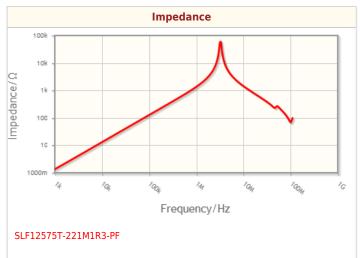


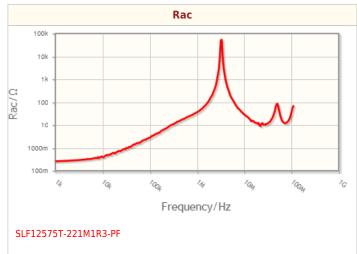

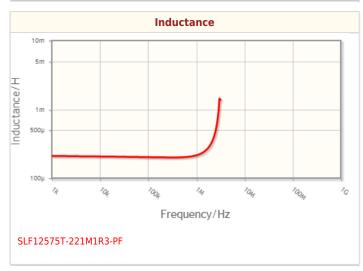

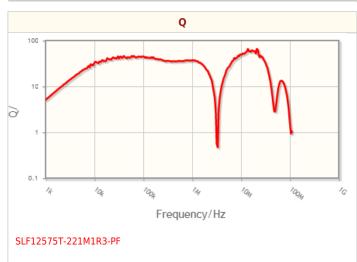

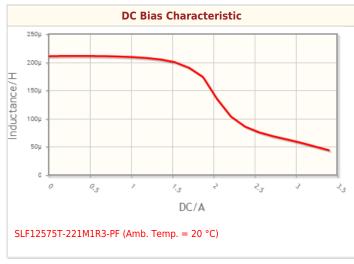

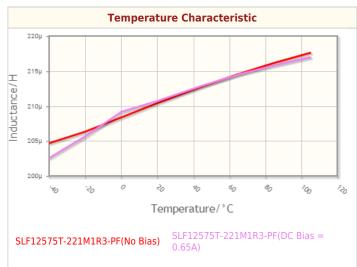

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.












## Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

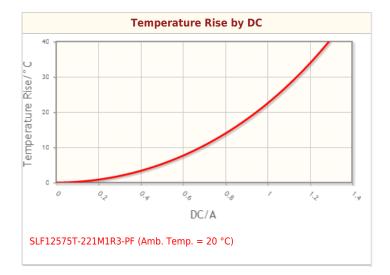

<sup>!</sup> Images are for reference only and show exemplary products.

<sup>!</sup> This PDF document was created based on the data listed on the TDK Corporation website.

<sup>!</sup> All specifications are subject to change without notice.













# **Associated Images**





<sup>!</sup> Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

<sup>!</sup> All specifications are subject to change without notice.